


SERVICE MANUAL

SII CHASSIS

MODEL	DEST.	CHASSIS NO.	MODEL	DEST.	CHASSIS NO.
PVM-14N1A	Australian	SCC-J34B-A	PVM-20N1A	Australian	SCC-J34D-A
PVM-14N1E	AEP	SCC-H98B-A	PVM-20N1E	AEP	SCC-H98D-A
PVM-14N1MDE	AEP	SCC-H98G-A	PVM-20N1U	US Canadian	SCC-H96D-A
PVM-14N1U	US Canadian	SCC-H96B-A	PVM-20N2A	Australian	SCC-J34C-A
PVM-14N2A	Australian	SCC-J34A-A	PVM-20N2E	AEP	SCC-H98C-A
PVM-14N2E	AEP	SCC-H98A-A	PVM-20N2U	US Canadian	SCC-H96C-A
PVM-14N2U	US Canadian	SCC-H96A-A	SSM-20N1E	AEP	SCC-H98F-A
SSM-14N1E	AEP	SCC-H98E-A	SSM-20N1U	US Canadian	SCC-H96F-A
SSM-14N1U	US Canadian	SCC-H96E-A			

REVISED-2

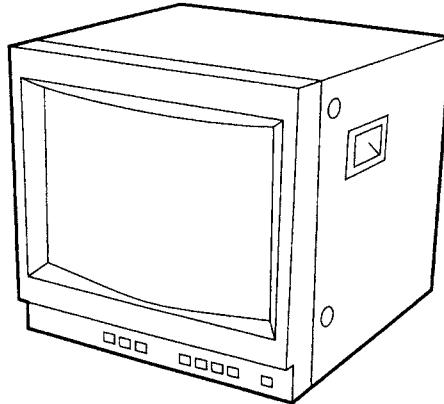

TRINITRON® COLOR VIDEO MONITOR

SONY®

Specifications

Video signal

Color system	NTSC, PAL, SECAM, NTSC4.43
Resolution	500 TV lines
Frequency response	
LINE	6 MHz±3dB (Y signal)
RGB	(PVM-14N1A/14N1E/14N1U/14N2A/14N2E/14N2U/ 20N1A/20N1E/20N1U/20N2A/20N2E/20N2U ONLY) 6 MHz±3dB

Picture performance

Normal scan	7 % over scan of CRT effective screen area
H. linearity	Less than 8.0 % (typical)
V. linearity	Less than 7.0 % (typical)
CRT	P22 phosphor
Color temperature	6,500 K

Inputs

LINE A/B (PVM-14N1A/14N1E/14N1MDE/14N1U/14N2A/ 14N2E/14N2U/20N1A/20N1E/20N1U/20N2A/20N2E/ 20N2U ONLY)	
Y/C IN	4-pin mini-DIN(x2) <i>See the pin assignment on the next page.</i>
VIDEO IN	BNC connector (x2), 1Vp-p +3 dB, -6 dB, sync negative
AUDIO IN	Phono jack (x2), -5 dBu ^{a)} , more than 47 kilo-ohms
LINE (SSM-14N1E/14N1U/20N1E/20N1U ONLY)	
Y/C IN	4-pin mini-DIN(x1) <i>See the pin assignment on this page.</i>
VIDEO IN	BNC connector (x1), 1Vp-p+3 dB, -6 dB, sync negative
AUDIO IN	Phono jack (x1), -5 dBu ^{a)} , more than 47 kilo-ohms
RGB (PVM-14N2A/14N2E/14N2U/20N2A/20N2E/20N2U only)	
R/G/B BNC connector (x3)	0.7 Vp-p +3 dB, -6 dB Sync on green: 0.3 Vp-p, negative, Automatic 75 ohms termination
AUDIO IN	Phono jack (x1), -5 dBu ^{a)} , more than 47 kilo-ohms
EXT SYNC	BNC connector (x1) 4 Vp-p +3 dB, -6 dB, sync negative
REMOTE (PVM-14N2A/14N2E/14N2U/20N2A/20N2E/ 20N2U only)	
	Phono jack (x1) Open: currently selected input signal Low state (GND): input signal selected prior to the current input signal

a) 0 dBu = 0.775 Vr.m.s.

Outputs

LINE A	
Y/C OUT	4-pin mini-DIN (x1) loop-through, Automatic 75 ohms termination
VIDEO OUT	BNC connector (x1) loop-through, Automatic 75 ohms termination
AUDIO OUT	Phono jack (x1) loop-through
Speaker output	Output level: 0.8 W

General

(PVM-14N1MDE only)

Classification of equipment

- Type of protection against electric shock:

Class I equipment

* Standard evaluated to:

EN 60 601

CSA C22.2 No.601.1

UL 2601-1

- Degree of protection against harmful ingress of water:
Ordinary equipment

- Degree of safety of application in the presence of a
flammable anaesthetic mixture:

Not protected equipment

- Mode of operation:

Continuous operation

- Information concerning type and frequency of technical
maintenance: Not need maintenance equipment

- Main power switch:

Functional switch

CRT 14-inch CRT with P-22

phosphor

Visible picture size 332 mm

(13-inch measured diagonally)

Power consumption

PVM-14N1A/14N1E/14N1MDE/

14N1U/SSM-14N1E/14N1U: 80W

PVM-14N2A/14N2E/14N2U: 80W

PVM-20N1U/20N2U/

SSM-20N1U: 100W

PVM-20N1A/20N2A/20N1E/

20N2E/SSM-20N1E: 105 W

Power requirements

100 to 240 V AC, 50/60Hz

"For use of PVM-14N1U/14N2U/
20N1U/20N2U/SSM-14N1U/20N1U",
operate these monitors on 120 V AC.
1.2-0.6A (PVM-14N1MDE)

Operating temperature

PVM-14N1A/14N1E/14N1U/14N2A/

14N2E/14N2U/20N1A/20N1E/

20N1U/20N2A/20N2E/20N2U,

SSM-14N1E/14N1U/20N1E/20N1U

:0 to +35°C (32 to 95°F)

PVM-14N1MDE:0 to +40°C (32 to


104°F)

Transport & Storage Condition
 Storage Temperature -10 to +40°C (14 to 104°F)
 Humidity 0 to 90 %
 Pressure 700 to 1060 hpa (PVM-14N1MDE)
 Dimensions (w/h/d) PVM-14N1A/14N1E/14N1MDE/
 14N1U/14N2A/14N2E/14N2U,
 SSM-14N1E/14N1U
 :346 × 340 × 414 mm
 (13½ × 13½ × 16¾ inches)
 PVM-20N1A/20N1E/20N1U/20N2A/
 20N2E/20N2U,
 SSM-20N1E/20N1U:
 449 × 441 × 502 mm
 (17¾ × 17¾ × 19¾ inches)
 Mass PVM-14N1A/14N1E/14N1MDE/
 14N1U/14N2A/14N2E/14N2U,
 SSM-14N1E/14N1U:
 Approx. 15 kg (33 lb 1 oz)
 PVM-20N1A/20N1E/20N1U/20N2A/
 20N2E/20N2U,
 SSM-20N1E/20N1U:
 Approx. 28 kg (61 lb 12 oz)
 Accessory supplied AC power cord (1)
 Operating Instructions (1)
 PVM-14N1MDE
 :Splash-proof covers (2)

(PVM-14N1MDE only)

Pin assignment

Y/C IN connector (4-pin mini-DIN)



Pin No.	Signal	Description
1	Y-input	1 Vp-p, sync negative, 75 ohms
2	CHROMA subcarrier-input	286m Vp-p (NTSC), 300m Vp-p (PAL), burst Delay time between Y and C: within 0 ± 100 nsec., 75 ohms
3	GND for Y-input	GND
4	GND for CHROMA-input	GND

Design and specifications are subject to change without notice.

Electromagnetic Compatibility



This device complies with the requirements of Directive 89/336/EEC concerning electromagnetic compatibility.
This device meets EN50081-1/92 and EN50082-1/92.

CAUTION

SHORT CIRCUIT THE ANODE OF THE PICTURE TUBE AND THE ANODE CAP TO THE METAL CHASSIS, CRT SHIELD, OR CARBON PAINTED ON THE CRT, AFTER REMOVING THE ANODE.

WARNING!!

AN ISOLATION TRANSFORMER SHOULD BE USED DURING ANY SERVICE TO AVOID POSSIBLE SHOCK HAZARD, BECAUSE OF LIVE CHASSIS.
THE CHASSIS OF THIS RECEIVER IS DIRECTLY CONNECTED TO THE AC POWER LINE.

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY SHADING AND MARK Δ ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY. CIRCUIT ADJUSTMENTS THAT ARE CRITICAL TO SAFE OPERATION ARE IDENTIFIED IN THIS MANUAL. FOLLOW THESE PROCEDURES WHENEVER CRITICAL COMPONENTS ARE REPLACED OR IMPROPER OPERATION IS SUSPECTED.

ATTENTION

APRES AVOIR DECONNECTE LE CAP DE L'ANODE, COURTCIRCUITER L'ANODE DU TUBE CATHODIQUE ET CELUI DE L'ANODE DU CAP AU CHASSIS METALLIQUE DE L'APPAREIL, OU AU COUCHE DE CARBONE PEINTE SUR LE TUBE CATHODIQUE OU AU BLINDAGE DU TUBE CATHODIQUE.

ATTENTION!!

AFIN D'EVITER TOUT RISQUE D'ELECTROCUTION PROVENANT D'UN CHASSIS SOUS TENSION, UN TRANSFORMATEUR D'ISOLEMENT DOIT ETRE UTILISE LORS DE TOUT DEPANNAGE. LE CHASSIS DE CE RECEPTEUR EST DIRECTEMENT ACCORDÉ À L'ALIMENTATION SECTEUR.

ATTENTION AUX COMPOSANTS RELATIFS À LA SÉCURITÉ!!

LES COMPOSANTS IDENTIFIÉS PAR UNE TRAME ET PAR UNE MARQUE Δ SUR LES VUES EXPLOSÉES ET LES LISTES DE PIÈCES SONT D'UNE IMPORTANCE CRITIQUE POUR LA SÉCURITÉ DU FONCTIONNEMENT. NE LES remplacer que par des composants Sony dont le numéro de pièce est indiqué dans le présent manuel ou dans des suppléments publiés par Sony.

TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>	<u>Section</u>	<u>Title</u>	<u>Page</u>
1. GENERAL					
Features	5				
Location and Function of Parts and Controls	5				
Using On-Screen Menus	7				
Connections	10				
Attaching the Splash-Proof Covers	10				
2. DISASSEMBLY					
2-1. Cabinet Removal	11				
2-2. A Board Removal	11				
2-3. S Board Removal	11				
2-4. Service Position	11				
2-5. Picture Tube Removal	12				
Removal of Anode-cap	12				
3. SET-UP ADJUSTMENTS					
3-1. Preparations (1)	13				
3-2. Preparations (2)	15				
3-3. Writing Model Data	15				
3-4. Picture Output	15				
3-5. Landing Adjustment	15				
3-6. Convergence Adjustment	16				
3-7. Deflection Yoke Neck Rotation Adjustment	17				
3-8. G2 Adjustment	18				
3-9. White Balance Adjustment	18				
3-10. Focus Adjustment	19				
4. SAFETY RELATED ADJUSTMENT 20					
5. CIRCUIT ADJUSTMENT					
I. Preparations	21				
II. Deflection System Adjustment	21				
1. Vertical Deflection Section Adjustment	21				
2. Horizontal Deflection Section Adjustment	21				
III. Signal System Adjustment	21				
1. NTSC Color Demodulation Adjustment	22				
2. Analog RGB MAX Contrast Adjustment	22				
6. DIAGRAMS					
6-1. Block Diagrams (1)	23				
Block Diagrams (2)	25				
Block Diagrams (3)	26				
Block Diagrams (4)	27				
Block Diagrams (5)	27				
6-2. Circuit Boards Location	28				
6-3. Printed Wiring Boards and Schematic Diagrams	28				
A Board	29				
Q Board	43				
CA Board	43				
CB Board	44				
S Board	50				
6-4. Semiconductors	53				
7. EXPLODED VIEWS					
7-1. Chassis (14 inch)	54				
7-2. Chassis (20 inch)	55				
8. ELECTRICAL PARTS LIST 56					

SECTION 1 GENERAL

This section is extracted from instruction manual.

Features

Picture

Fine pitch Trinitron® picture tube

The fine pitch trinitron tube provides a high resolution picture. Horizontal resolution is more than 500 TV lines at the center of the picture.

Comb filter

When NTSC video signals are received, a comb filter activates to make more accurate Y/C separation. This contributes to less of a decrease in resolution, cross color and cross luminance phenomena.

Beam current feedback circuit

The built-in beam current feedback circuit assures stable white balance.

Four color system available

The monitor can display NTSC, PAL, SECAM and NTSC_{4.43}²⁾ signals. The appropriate color system is selected automatically.

Input

Analog RGB input connectors (for PVM-14N2A/14N2E/14N2U/20N2A/20N2E/ 20N2U only)

Analog RGB signals from video equipment can be input through these connectors.

Y/C input connectors

The video signal, split into the chrominance signal (C) and the luminance signal (Y), can be input through this connector, eliminating the interference between the two signals, which tends to occur in a composite video signal, ensuring video quality.

Automatic termination (connector with △ mark only)

The input connector is terminated at 75 ohms inside when no cable is connected to the loop-through output connector. When a cable is connected to an output connector, the 75-ohm termination is automatically released.

Functions

On-screen menus

You can set monitor operation settings by using the on-screen menus.

EIA standard 19-inch rack mounting

By using an MB-502B mounting bracket (for a 14-inch monitor, not supplied) or SLR-103A slide rail (for a 20-inch monitor, not supplied), the monitor can be mounted in an EIA standard 19-inch rack.


For details on mounting, refer to the instruction manuals supplied with the mounting bracket kit or slide rail kit.

Splash-proof covers (for PVM-14N1MDE only)

The monitor can be covered with splash-proof covers. The splash-proof covers protect the ventilation holes from splashes from medicines and other liquids.

Location and Function of Parts and Controls

Front

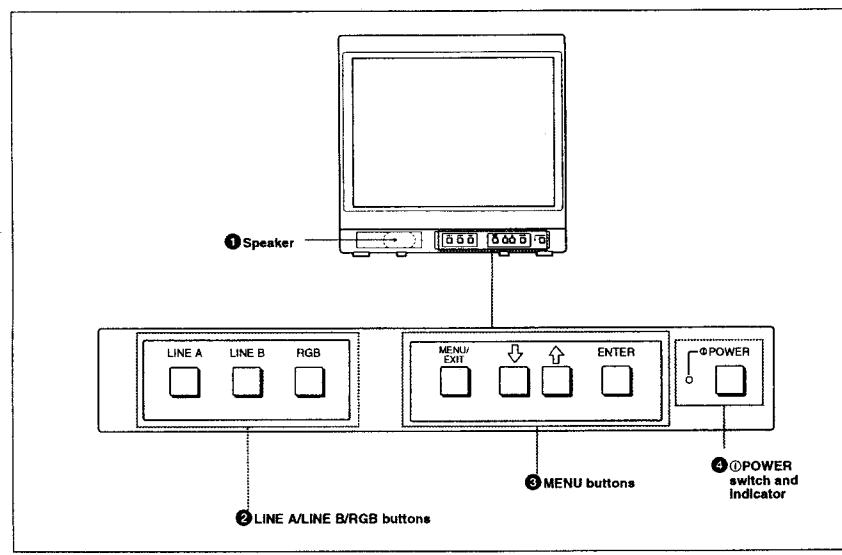

PVM-20N2A/20N2E/20N2U front panel

① Speaker

② LINE A/LINE B/RGB (input select) buttons
(PVM-14N1A/14N1E/14N1MDE/14N1U/14N2A/
14N2E/14N2U/20N1A/20N1E/20N1U/20N2A/
20N2E/20N2U only)

Press to select the program to be monitored.


Input signal	Press
Signal fed through the LINE A connector	LINE A
Signal fed through the LINE B connector	LINE B
Signal fed through the RGB connectors*	RGB*

a) Provided with the PVM-14N2A/14N2E/14N2U/20N2A/
20N2E/20N2U only.

③ MENU buttons

Press to make the menu appear.

For detailed information on MENU buttons, see "Operation through On-Screen Menus".

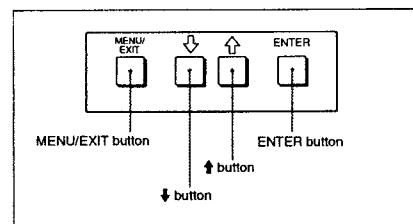

④ ④POWER switch and indicator
Press to turn the monitor on. The indicator lights in green.


To turn the power off, press this again.

1) "Trinitron" is a registered trademark of Sony Corporation.

2) The NTSC_{4.43} system refers to an NTSC color system in which the subcarrier frequency is modified to 4.43MHz. When an NTSC recorded video program is played back with a Trident (PAL/SECAM/NTSC_{4.43}) VTR, the NTSC_{4.43} signal is output.

Location and Function of Parts and Controls

Rear Panel

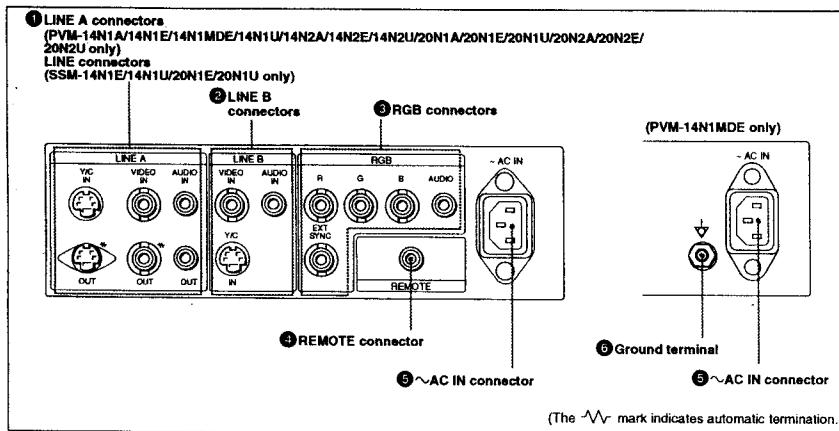

PVM-20N2A/20N2E/20N2U rear panel

① LINE A connectors (PVM-14N1A/14N1E/14N1MDE/14N1U/14N2A/14N2E/14N2U/20N1A/20N1E/20N1U/20N2A/20N2E/20N2U only)
LINE connectors (SSM-14N1E/14N1U/20N1E/20N1U only)

Input connectors for the composite video, Y/C separate video and audio signals and their loop-through output connectors.

To monitor the input signal fed through these connectors, press the LINE A button on the front panel. (PVM-14N1A/14N1E/14N1MDE/14N1U/14N2A/14N2E/14N2U/20N1A/20N1E/20N1U/20N2A/20N2E/20N2U ONLY)

Note

The Y/C IN connector has priority over the VIDEO IN connector.

When connecting the cable to the Y/C IN connector, the Y/C IN connector is automatically selected and the VIDEO IN connector is disconnected even if the cable is connected.

Y/C IN connector (4-pin mini-DIN)

Connect to the Y/C separate output connector of a video camera, VCR or other video equipment.

Y/C OUT connector (4-pin mini-DIN)
Loop-through output of the Y/C IN connector. Connect to the Y/C separate input connector of a VCR or another monitor.

When the cable is connected to this connector, the 75-ohm termination of the input is automatically released, and the signal input to the Y/C IN connector is output from this connector.

VIDEO IN connector (BNC-type)
Connect to the video output connector of video equipment, such as a VCR or a color video camera. For a loop-through connection, connect to the video output connector of another monitor.

VIDEO OUT connector (BNC-type)
Loop-through output connector of the VIDEO IN connector. Connect to the video input connector for a VCR or another monitor.

When the cable is connected to this connector, the 75-ohm termination of the input is automatically released, and the signal input to the VIDEO IN connector is output from this connector.

AUDIO IN connector (phono jack)

Connect to the audio output connector of a VCR or other equipment. For a loop-through connection, connect to the audio output of another monitor.

AUDIO OUT connector (phono jack)

Loop-through output of the AUDIO IN connector. Connect to the audio input connector of a VCR or another monitor.

② LINE B connectors (PVM-14N1A/14N1E/14N1MDE/14N1U/14N2A/14N2E/14N2U/20N1A/20N1E/20N1U/20N2A/20N2E/20N2U only)

Input connectors for the composite video, Y/C separate video and audio signals.

To monitor the input signal fed through these connectors, press the LINE B button on the front panel.

Y/C IN connector (4-pin mini-DIN)

Connect to the Y/C separate output connector of a video camera, VCR or other video equipment.

VIDEO IN connector (BNC-type)

Connect to the video output connector of video equipment, such as a VCR or a color video camera. For a loop-through connection, connect to the video output connector of another monitor.

AUDIO IN connector (phono jack)

Connect to the audio output connector of a VCR or other equipment. For a loop-through connection, connect to the audio output of another monitor.

③ RGB connectors (provided with the PVM-14N2A/14N2E/14N2U /20N2A/20N2E/20N2U only)

Analog RGB input connectors for the R/G/B signals, external sync signals and audio signals.

To monitor the input signal fed through these connectors, press the RGB button on the front panel.

R/G/B (input) connectors (BNC-type)

Connect to the analog RGB outputs connectors of a video camera, VCR or other video equipment. The monitor operates on the external sync signal.

The monitor also can operate on the sync signal from the G channel by setting RGB SYNC to SYNC ON GREEN in the menu.

For detailed information on sync signal setting, see "[\[3a\] RGB SYNC menu "on page 12 of "Functions of On-Screen Menus".](#)

AUDIO IN connector (phono jack)

Connect to the audio output connectors of video equipment when the analog RGB signal is input.

EXT SYNC (external sync input) connector (BNC-type)

Connect to the sync signal output of a video camera, VCR or other video equipment.

When you set RGB SYNC to SYNC ON GREEN in the menu, the monitor operates on the sync signal from the G channel so that it is not necessary to use this connector.

For detailed information on sync signal setting, see "[\[3a\] RGB SYNC menu "on page 12 of "Functions of On-Screen Menus".](#)

④ REMOTE connector (phono jack) (provided with the PVM-14N2A/14N2E/14N2U /20N2A/20N2E/20N2U only)

This connector functions as follows.

Open: When this connector is open, the current input signal is selected.

Ground: By grounding this connector, the input signal selected before this current signal is selected.

⑤ ~AC IN (inlet) connector

Connect the supplied AC power cord to this connector and to a wall outlet.

⑥ Ground (↓) terminal (provided with the PVM-14N1MDE only)

Connect a GND cable.

Using On-Screen Menus

(PVM-14N1A/14N1E/14N1MDE/14N1U/14N2A/14N2E/14N2U/
20N1A/20N1E/20N1U/20N2A/20N2E/20N2U only)

You can make various settings and adjustments of the monitor using the on-screen menus.

On-Screen Menu Configuration

The on-screen menu is composed of the following two menu types.

Item selection menu


You can select an adjustment and setting item such as sound volume, contrast, brightness, color intensity, color system and menu language by using the \uparrow , \downarrow and ENTER buttons.

Adjustment and setting menus

You can make desired adjustment or setting on corresponding menu. The settings and adjustments remain unchanged until next adjustment even if you turn off the power.

To reset the settings and adjustments to the factory-settings, select "FACTORY PRESET" from [2d]USER MEMORY menu.

On-screen menu tree-chart

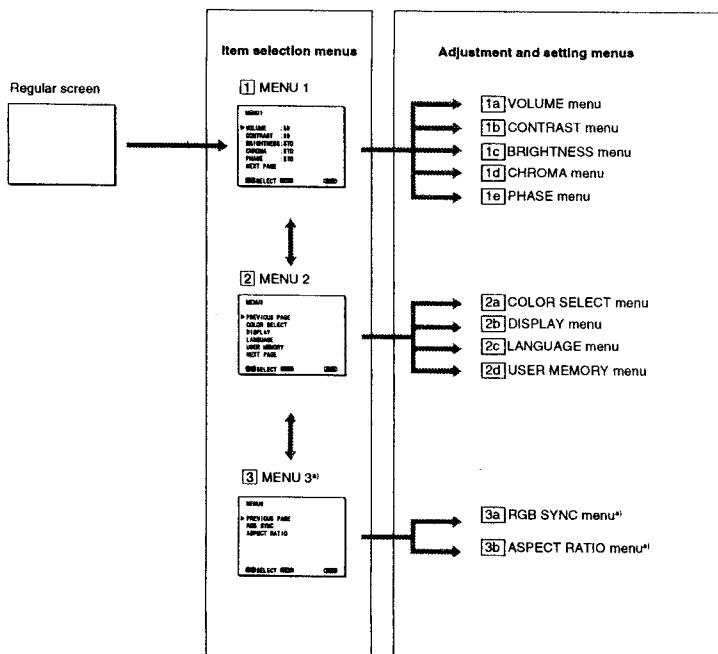

^{a)} These menus ([3a], [3b] and [3b]) are provided with PVM-14N2A/14N2E/14N2U/20N2A/20N2E/20N2U only.

Using On-Screen Menus

(SSM-14N1E/14N1U/20N1E/20N1U only)

You can make various settings and adjustments of the monitor using the on-screen menus.

On-Screen Menu Configuration

The on-screen menu is composed of the following two menu types.

Item selection menu


You can select an adjustment and setting item such as sound volume, contrast, brightness, color intensity, color system and menu language by using the \uparrow , \downarrow and ENTER buttons.

Adjustment and setting menus

You can make desired adjustment or setting on corresponding menu. The settings and adjustments remain unchanged until next adjustment even if you turn off the power.

To reset the settings and adjustments to the factory-settings, select "FACTORY PRESET" from [2d]USER MEMORY menu.


On-screen menu tree-chart

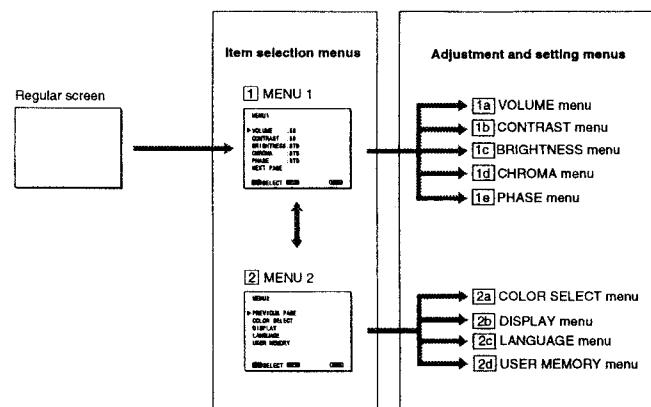


Operation through On-Screen Menus

Menu operation buttons

There are four menu operation buttons on the front panel of the monitor.

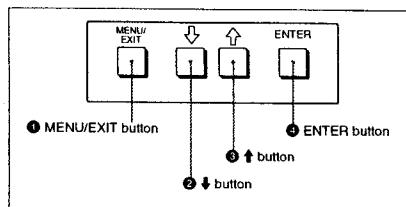

Usable buttons depend on the displayed menu. Buttons that can be used on the menu are displayed at the bottom line of the screen. You can perform menu operation using displayed buttons.

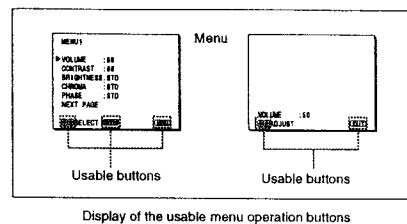

Operating procedures

To display the menu, follow this procedure.

- 1 Press the MENU/EXIT (1) button.
- 2 MENU 1 appears.
- 3 To select items other than ones not displayed on MENU 1
Select [2] MENU 2 or [3] MENU 3^{a)}.
For details of how to select, see the "To change the item selection menus" described later.
- 4 Move the cursor to the desired item by pressing the ↓ or ↑ (2, 3) button.
- 5 Press the ENTER (4) button.

The adjustment and setting menu selected in step 2 appears.

For detailed information of menus, see "Functions of On-Screen Menus".


a) You can use the ENTER button only on the [2] USER MEMORY menu of the adjustment and setting menus.

^{a)} [3] MENU 3 is provided with PVM-14N2A/14N2E/14N2U/20N2A/20N2E/20N2U only.

Using On-Screen Menus

To change the item selection menus

Select NEXT PAGE on the menu to display next item selection menu and PREVIOUS PAGE on the menu to display the previous item selection menu.

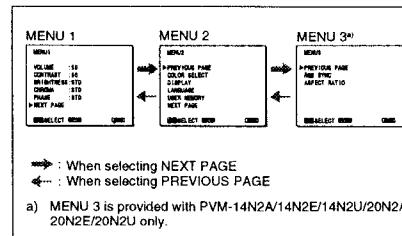

How to change the item selection menu

To return to the item selection menu from the adjustment and setting menus

Press the MENU/EXIT (1) button on the currently displayed adjustment and setting menu.

To close the menu (to return to the regular screen)

Press the MENU/EXIT (1) button when the item selection menu is displayed. The on-screen menu disappears and the regular screen appears.

Functions of On-Screen Menus

Item selection menus

1 MENU 1

MENU 1 menu has the following selection items.

Item	Functions
VOLUME	To obtain the desired volume
CONTRAST	To adjust the contrast
BRIGHTNESS	To adjust the brightness
CHROMA	To adjust the color intensity
PHASE	To adjust the phase

2 MENU 2

MENU 2 menu has the following selection items.

Item	Function
COLOR SELECT	To select the color system of the input signal
DISPLAY	To select period of display
LANGUAGE	To select the menu language
USER MEMORY	To store and recall the values and settings adjusted by a user, and recall the factory-settings

3 MENU 3

(for PVM-14N2A/14N2E/14N2U/20N2A/20N2E/20N2U only)

MENU 3 menu has the following selection items.

Item	Function
RGB SYNC	To select the sync signal when the RGB signals are input
ASPECT RATIO	To select the aspect ratio

Adjustment and setting menu

1a) VOLUME menu (Factory setting: 50)




Adjust the speaker volume.
The volume increases by pressing the ↑ button.
The volume decreases by pressing ↓ button.

1b CONTRAST menu (Factory setting: 60)



Adjust the contrast of the screen.
The contrast becomes higher by pressing the **↑** button.
The contrast becomes lower by pressing **↓** button.

1c BRIGHTNESS menu (Factory setting: STD)



Adjust the brightness of the screen.
The screen becomes brighter by pressing the **↑** button.
The screen becomes darker by pressing **↓** button.

1d CHROMA menu (Factory setting: STD)




Adjust the color intensity of the video signal.
The color intensity strengthens by pressing the **↑** button.
The color intensity weakens by pressing **↓** button.

Note

The color intensity of an composite video signal or a Y/C separate signal can be corrected on this menu.
That of the RGB signals cannot be corrected.

1e PHASE menu (Factory setting: STD)




Adjust the phase of the video signals.
The skin tone becomes greenish by pressing the **↑** button.

The skin tone becomes purplish by pressing the **↓ button.**

Note

The phase of an NTSC composite video signal or a Y/C separate signal can be corrected on this menu. The PAL composite video signal or a Y/C separate signal and RGB signals cannot be corrected.

2a COLOR SELECT menu (Factory setting: AUTO)



Select the color system of the input signal.
AUTO: Input color systems are automatically selected.
When you input NTSC signal, trap filter will activate. To monitor NTSC signal with comb filter, select NTSC COMB in this menu.

2b DISPLAY menu (Factory setting: SHORT TIME)



Select the period of displaying the color system of the current input signals.
The items have the following functions.

Item	Function
SHORT TIME	To display the kind of color system being used for several seconds on the screen each time you change the signal input.
LONG TIME	To display the kind of color system being used for approximately five minutes on the screen each time you change the signal input.
OFF	Not to display the kind of the color system.

2c LANGUAGE menu (Factory setting: ENGLISH)



Select the menu language among the five languages, English, German, French, Italian and Spanish.

Using On-Screen Menus

2d USER MEMORY menu




The items have the following functions.

Item	Function
STORE	To store all adjustments and settings currently set on each menu into the internal memory.
RECALL	To recall all adjustments and settings currently stored in the internal memory.
FACTORY PRESET	To reset the adjustments and settings currently set on each menu to the factory settings. ^{a)}


- a) The current settings and adjusted values are reset to the factory settings. The values and settings adjusted and stored in the internal memory by using the STORE menu, however, are not changed. To reset internally stored adjusted values and settings to the factory setting, select FACTORY PRESET, first, then select STORE.

When you press the ENTER (4) button, the following message is displayed for about two seconds. The currently selected item becomes active when pressing the ENTER (4) button.



The following menus are provided with the PVM-14N2A/14N2E/14N2U /PVM-20N2A/20N2E/20N2U only.


3a RGB SYNC menu (Factory setting: EXT SYNC)



Select the sync signal when the RGB signals are input.
The items have the following functions.

Item	Function
EXT SYNC	To operate the monitor on an external sync signal fed through the RGB SYNC connector.
SYNC ON GREEN	To operate the monitor on the sync signal from the G channel.

3b ASPECT RATIO menu (Factory setting: 4:3)




Select the aspect ratio of the screen.

Connections

How to Connect the AC Power Cord


Connect the AC power cord (supplied) to the \sim AC IN connector and to a wall outlet.

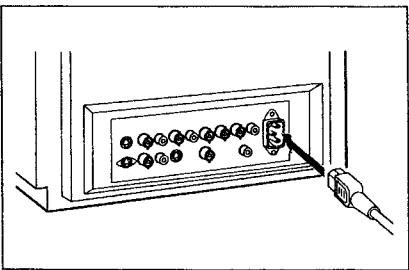

PVM-20N2A/20N2E/20N2U rear panel

How to Connect a Cable to a BNC Connector


Connect the coaxial cable with the BNC connectors to the BNC connectors on the rear panel as illustrated below.

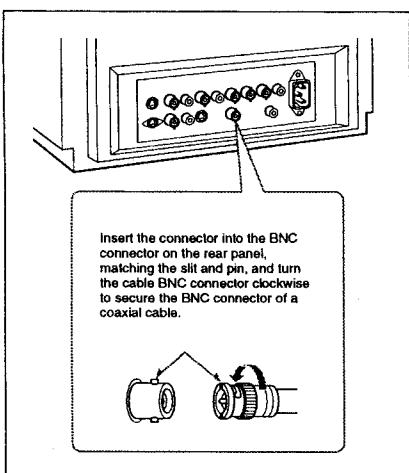

PVM-20N2A/20N2E/20N2U rear panel

Attaching the Splash-Proof Covers

(PVM-14NIMDE only)

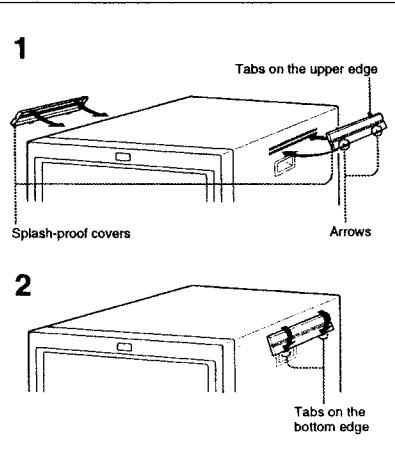

In order to protect the ventilation holes from splashes from medicines, etc., attach the supplied splash proof covers as illustrated.

- 1 Hook the tabs on the upper edge into the ventilation holes, making sure that the arrows on the cover are facing down.

Note


Attach the splash-proof covers on all ventilation holes.

- 2 Push up the tabs on the bottom edge and fit the cover into the lowest ventilation holes.


Attach covers on both left and right vents.

SECTION 2 DISASSEMBLY

2-1. CABINET REMOVAL

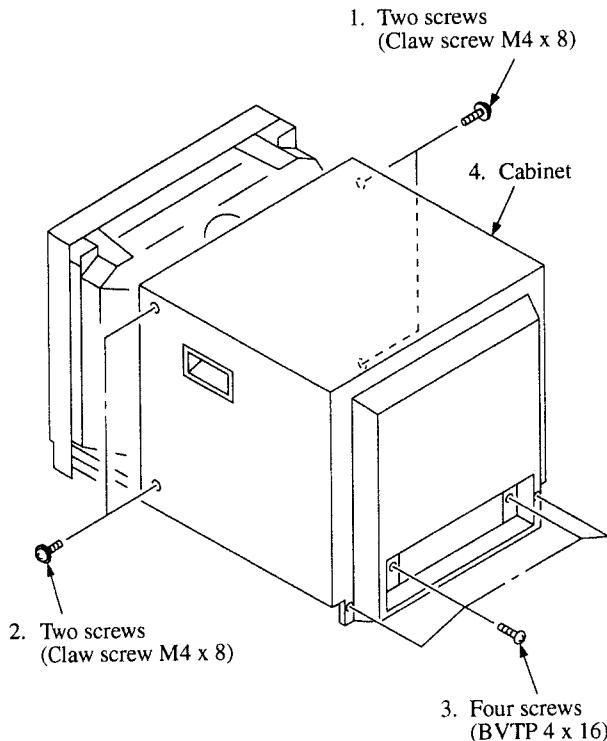

2-2. A BOARD REMOVAL


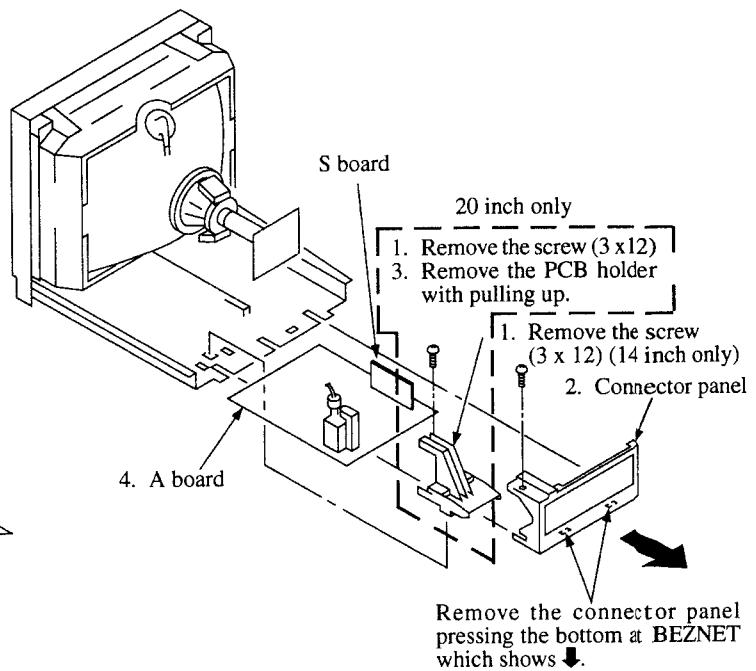


2-3. S BOARD REMOVAL


2-4. SERVICE POSITION

1. Remove the A board (Refer to 2-2)

1. Remove the connector (CN802).

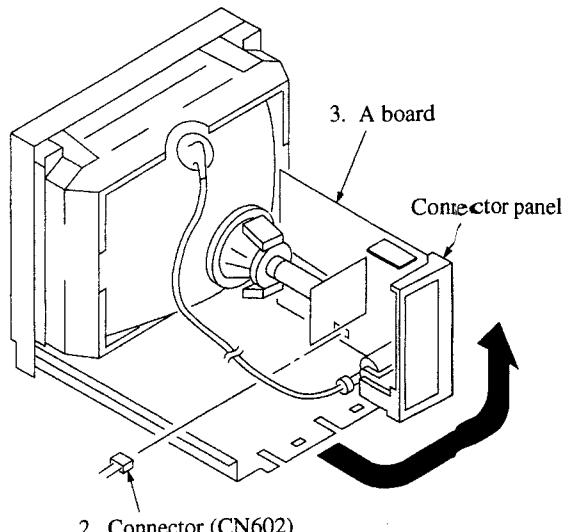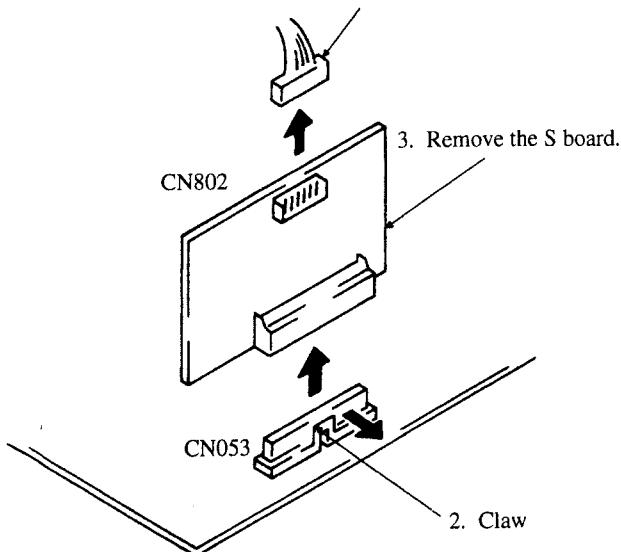


2-5. PICTURE TUBE REMOVAL

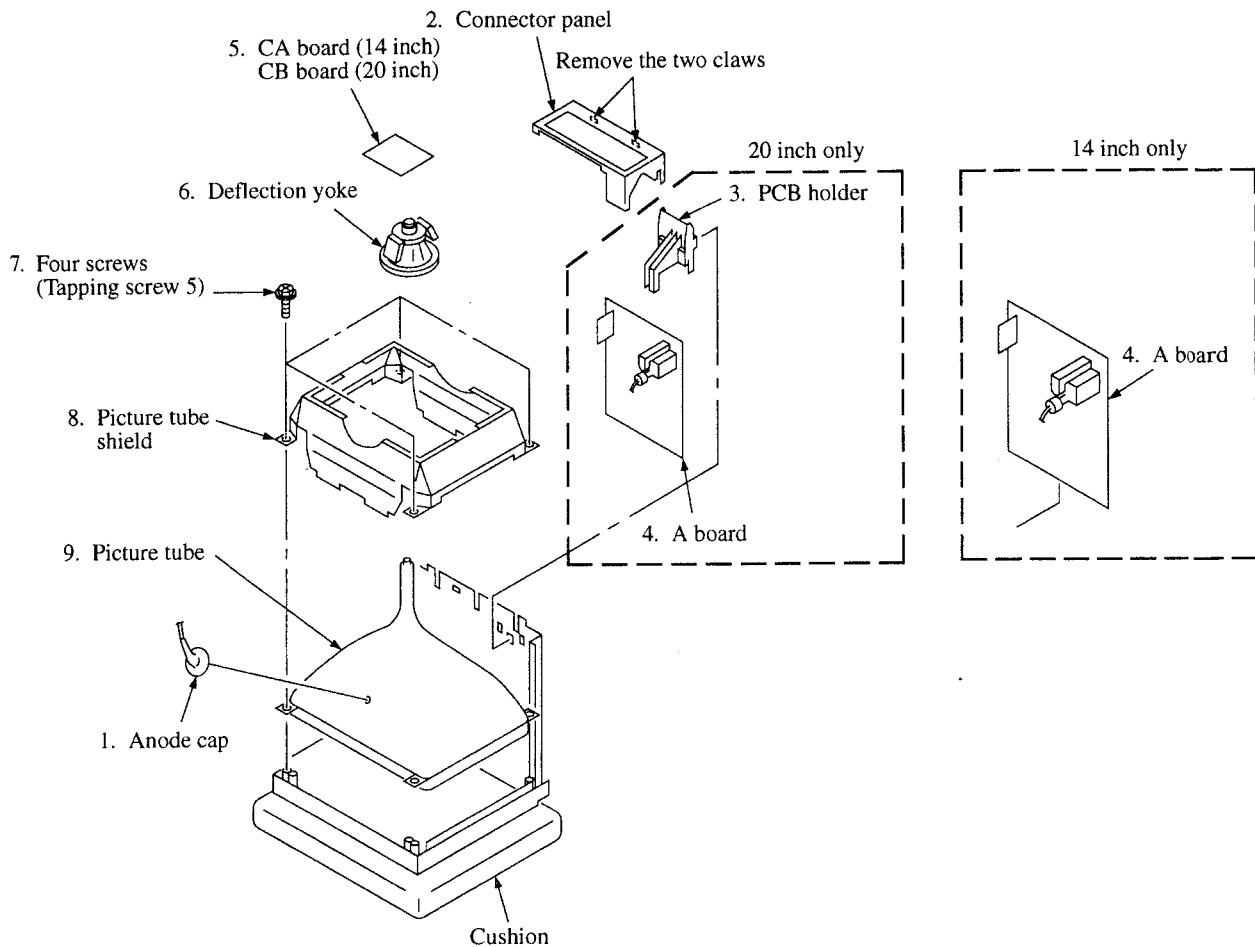


• REMOVAL OF ANODE-CAP

NOTE: Short circuit the anode of the picture tube and the anode cap to the metal chassis, picture tube shield or carbon painted on the picture tube, after removing the anode.


• REMOVING PROCEDURES

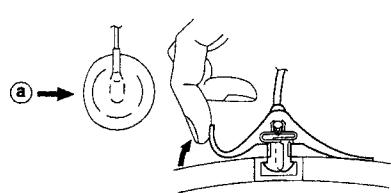

1. Turn up one side of the rubber cap in the direction indicated by the arrow (a).

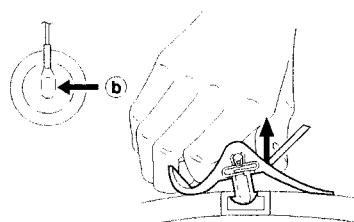



2. Using a thumb pull up the rubber cap firmly in the direction indicated by the arrow (b).



3. When one side of the rubber cap is separated from the anode button, the anode-cap can be removed by turning up the rubber cap and pulling it up in the direction of the arrow (c).

• HOW TO HANDLE AN ANODE-CAP

1. Don't hurt the surface of anode-caps with sharp shaped material!
2. Don't press the rubber hard not to hurt inside of anode-caps!
A material fitting called as shatter-hook terminal is built in the rubber.
3. Don't turn the foot of rubber over hardy!
The shatter-hook terminal will stick out or hurt the rubber.

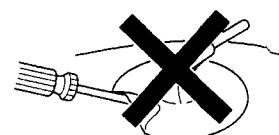

SECTION 3

SET-UP ADJUSTMENTS

3-1. PREPARATIONS (1)

Perform all adjustments after five minutes the power is turned ON.

Service Mode

This set is provided with a service switch on the front panel that can be used to make various adjustments. The operation method of this switch is explained in detail below.

1. ENTERING THE SERVICE MODE

Simultaneously press both the [ENTER] key and [MENU] key that do not display condition any menus. When "Ver ***" is displayed on the screen, press the [ENTER] key twice.

(4)	
(1)	(2)
(3)	

Range of Service Mode Display

2. SERVICE MODE DISPLAY

- (1) This is the serial number for each of the service items.0-65.
- (2) The service item a name displayed.
- (3) This is the adjustment data for the service items that are now stored in the RAM. Adjustments can be made by changing these values, but as long as nothing is saved to the ROM the adjustment values will be erased by turning off the power or by input select, so please be careful.
- (4) SAVE a displayed to the guidance.

3. FINISHING THE SERVICE MODE

Simultaneously press the [ENTER] key and the [MENU] key shown in the display of the menu.

4. CHANGE OF SERVICE ITEMS

The item are returned with the [LINE-A] key and forwarded with the [LINE-B] Key. When a key is continuously pressed, the operation will be repeated.

5. CHANGE OF SERVICE DATA

The service data is made larger with the [↑] key and smaller with the [μ] key. When continuously pressing the keys, the operation will be repeated.

6. READING THE SERVICE DATA

For items with different adjustment data for each input line, return to the normal mode, switch the input, enter the service mode again, and perform the adjustment.

For items with different adjustment data for every color standard, return to the normal mode, select COLOR SELECT in the forcible mode, enter the service mode again, and perform the adjustment.

7. WRITING OF SERVICE DATA

When writing data from the RAM to the ROM, press the [MENU] key once and check that the SAVE display is shown in the guidance, and then press the [MENU] key once again to display SAVE ♫. Not only the displayed data will be written, but all data, so please be careful.

Note: The [LINE-A] and [LINE B] buttons of the A board must be pressed after the service mode cabinet of SSM-14N1E/14N1U/20N1E/20N1U is removed.

Initial Setting of Service Data ROM

Common for Each Model

NO.	DISP	ITEM	14inch	20inch
00	PKUN	Peaking level undershoot	0	0
01	PKOV	Peaking level overshoot	0	0
02	CPKV	Peaking level for chroma red (R-Y)	3	3
03	CCOR	Coring level for chroma peaking	3	3
04	CPKU	Peaking level for chroma blue (B-Y)	3	3
05	CFS	Trap filter characteristic broad/narrow (Include NTSC, PAL and SECAM)	1	1
06	H CENT	H.center of composite signal (Video phase)	6E	6E
07	WDRV	White drive value for measurement reserved	190	190
08	EWDM	White drive measurement disabled/enabled	0	0
09	VBSO	V. blanking stop	14	14
10	AVST	Start of active video	17	17
11	AGCREF	Sync amplitude reference	2DC	2DC
12	(V CENT) <*V CENT>	V. center	D9D	D9D
13	VIDEO S-BRT	Video sub bright	100	100
14	RGB S-BRT	RGB sub bright	100	100
15	RGB CONT	RGB maximum contrast (Adjust for max point of cont)	10D	10D
16	CLPGI	Integral clamp loop gain	1	1
17	CLPGP	Proportional clamp loop gain	6	6
18	CLPMOD	Clamping mode	(D)<5>	(D)<5>
19	*DRIVE LIMIT	Current feed back pulse drive (Define the size of feedback pulse)	1D0	1D0
20	KILHY	Amplitude color killer hysteresis	2	2
21	KILVL	Amplitude color killer level	9	9
22	GAIN	AGC gain value	2D	2D
23	SGAIN	Start value for AGC gain	2D	2D
24	BCLTHR	Threshold level for beam current limiter	[CA] (BE)<2> (E1)<E5>	[13E]
25	BCLTM	Time constant for beam current limiter	[7](8)<5>	[7](8)<5>
26	BCLG	Loop gain for beam current limiter	[80]< (B00)<0>> (919)<805>	[809]
27	BCLMIN	Minimum contrast for beam current limiter (Define the value of contrast)	0	0
28	INTLC	Interlace offset	0	0
29	EHT	Correction level for zooming picture	[2A]<A (2A)<33>	[2A]
30	EHTTM	Time constant for EHT	[3](6)<3>	6<3>
(31)	(SLCLVL)	(Sync. slice level)	(8C)	(89C)
<31>	<SVWIN1>	H-PLL stop timing	<7>	<7>
<32>	<SVWIN2>	H-PLL start timing	<FFC>	<FFC>
(32)<33>	IF1	Proportional H-PLL gain(H-PLL defines the time constant of AFC from IF-1 and IF-2 which make movements for AFC of H)	I E	1E
(33)<34>	IF2	Integral H-PLL gain (H-PLL defines the time constant of AFC from IF-1 and IF-2 which make movements for AFC of H)	B	B
(38)<39>	* R C/O	Red cutoff	D	47
(39)<40>	* G C/O	Green cutoff	i4	43
(40)<41>	* B C/O	Blue cutoff	6	64

NO.	DISP	ITEM	14inch	20inch
(50)<51>	*H SIZE	H. size	EE	1C
(51)<52>	*PIN PHASE	Pin phase	F4	F5
(52)<53>	*PIN AMP	Pin amp	AE	8A
(53)<54>	*H SEXY PIN	H. sexy pin	FE	FB
(54)<55>	*H COR PIN	H. correction pin	48	6D
(55)<56>	V PO	Initial value for V.center	0	0
(56)<57>	*V SIZE	V. size	53	66
(57)<58>	*V LIN DOWN	V. linearity down	FF	3
(58)<59>	*V LINE UP	V. linearity up	EE	F1
(59)<60>	CHROMA	Chroma center	55	55
(64)	(COMB)	Timing for NTSC comb filter	(C3)	(C3)
<65>	*<DA TRIM>	Trimming level for video output	<200>	<200>

Exclusive to Each Model

NO.	DISP.	ITEM	With RGB	Without RGB
(63)<64>	MODEL	Model selection	1	0

Setting for Each Input

NO.	DISP.	ITEM	VIDEO		ANALOG-RGB	
			14inch	20inch	14inch	20inch
(35)<36>	*R DRIVE	Red drive	254	1D5	254	1D5
(36)<37>	*G DRIVE	Green drive	21A	1E8	21A	1E8
(37)<38>	*B DRIVE	Blue drive	1B6	186	1B6	186
(41)<42>	RGB CLAMP	Clamp timing for RGB (Pedestal clamp)	180	180	180	180
(42)<43>	SYNC F B	Timing between sync and fly back pulse	7	7	7	7
(60)<61>	*R C/O REF	Red cutoff reference	A0	A0	A0	A0
(61)<62>	*G C/O REF	Green cutoff reference	70	70	70	70
(62)<63>	*B C/O REF	Blue cutoff reference	50	50	50	50

Setting for Each Line Frequency

NO.	DISP.	ITEM	525/60	625/50
(43)<44>	PMST	Picture measurement start	14	14
(44)<45>	PMSO	Picture measurement stop	F9	132
(45)<46>	TML	Measurement line for beam current feed back (The position of beam current feed-back pulse is changeable)	B	B
(46)<47>	H BLK1	H blanking stop	2E	2C
(47)<48>	H BLK2	H blanking start	0	1
(48)<49>	VBST	V. blanking start	FA	133

Setting for Each Color Standard

NO.	DISP.	ITEM	NTSC 358		NTSC 443	PAL	SECAM
			TRAP	COMB			
(34)<35>	TINT	NTSC tint angle	FFF	A8	-	-	-
(49)<50>	L/C DELAY	Luminance/chroma delay	3	3	3	3	17

Note:

- Each IC version has its own displays of service mode. Refer to the followings.

No mark : common

() : Ver 1.20/1.30/1.40

< > : Ver 2.00

[] : for V901 (black CRT)

* V901 has been changed from a gray CRT to a black CRT.

Refer to SECTION 8. Electrical Parts List on page 71 for the list of serial numbers.

- The data with marking "*" to the name of signal can be changed freely.

The data without marking "*" is a fixed data.

3-2. PREPARATIONS (2)

* When composite video signal are supplied, they must be supplied as below.

Signal		Signal Contents	Standard Level P-W
COMPOSITE VIDEO	358NT 443NT	100% WHITE	0.714V
		75% WHITE	0.536V
		BURST (GREEN) (This item only P-P)	286mV (632mV)
	PAL SECAM	100% WHITE	0.7V
		75% WHITE	0.525V
		PAL BURST (GREEN) (This item only P-P)	300mV (664mV)

* In this document, terms inside boxes are names of service mode adjustments.

Example H. SIZE

* After making adjustments in service mode, save the adjustment data before cutting off the power. If you cut off the power without saving, the results of your adjustments are all lost.

* Standard inspection conditions

Unless specifically specified otherwise in this document, the following conditions are used for adjustments and inspections.

VOLUME	50%
CONTRAST	60%
BRIGHTNESS	STD
CHROMA	STD
PHASE	STD
ASPECT RATIO	4:3

3-3. WRITING MODEL DATA

1. In service mode, write in the following model data at No. 63 MODEL.

PVM- 14N1A	PVM- 14N2A	SSM- 14N1E
14N1E	14N2E	14N1U0
14N1MDE	14N2U	20N1E0
14N1U0	20N2A	20N1U0
20N1A	20N2E	
20N1E	20N2U	
20N1U		

3-4. PICTURE OUTPUT


- Set the AC input voltage.
 - Input the video and audio signals to the corresponding terminals on the connector panel.
 - Set the sliduck voltage as shown on the right.

Model	Voltage
PVM- 14N1U/14N2U/ 20N1U/20N2U SSM- 14N1U/20N1U	AC120 ± 3V (Distortion rate: 3% or less)
PVM- 14N1A/14N1E/ 14N1MDE/ 14N2A/14N2E/ 20N1A/20N1E/ 20N2A/20N2U SSM- 14N1E/20N1E	AC220 ± 3V (Distortion rate: 3% or less)


3-5. LANDING ADJUSTMENT

- Preparations
 - To reduce the influence of geomagnetism, face the set's CRT screen east or west.
 - Loosen the deflection yoke fixture and lower the deflection yoke to the rear.
 - Switch on the Power switch and degauss with the degausser.
 - Adjust the deflection yoke tilt.
 - Switch (S501) position is center.
- Adjustment
 - CONTRAST MIN
BRIGHTNESS Position providing good vision
 - The rough adjustments of the white balance, G2, and convergence must be completed already.
 - Set green-only.
 - Adjust the purity knob so that the green comes to the center of the screen. Make the red and blue about even. Fig.1
 - Switch to blue only, red only, and green only and verify each. Fig. 1, 2, and 3
 - Bring the deflection yoke gradually forward and adjust the deflection yoke so that the R and B at both sides of the screen become green. Fig.2→3
 - If the deflection yoke comes too far forward, you will see the pattern shown in Figure 4. If that happens, lower the deflection yoke to the rear. Fig. 4→3
 - Switch the single color switch to B and verify the single color. Fig.6
 - Switch the single color switch to R and verify the single color. Fig.9
 - When one of the colors does not become the single color correctly, check by repeating items 7 and 8 based on the single color not coming into adjustment.
If you can not obtain landing in the corners, place on magnets.
 - Switch to an all-white signal and check the uniformity.
 - When the deflection yoke position is determined, fasten it with the fixture.

14 inch


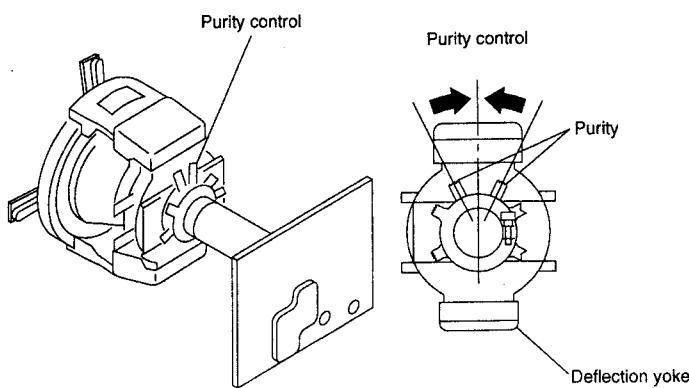


20 inch

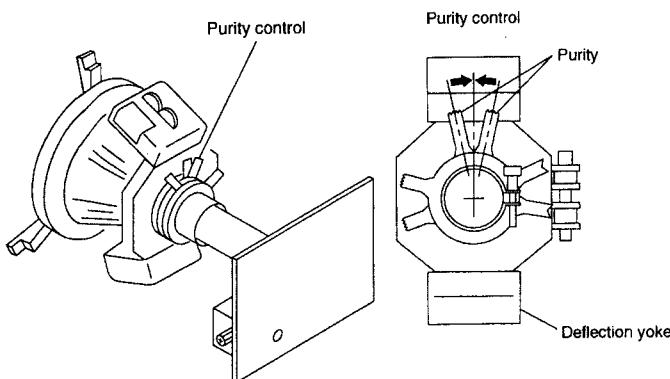

3-6. CONVERGENCE ADJUSTMENT



1. Input a dot pattern signal.
CONTRAST Position providing good vision
BRIGHTNESS MIN
2. Align the horizontal R, G, and B dots at the center of the screen with the H-STAT VR. (*1)
*1: If the H-CENTER adjustment was after the H-STAT adjustment, re-adjust the H-STAT.
(The H-CENT SW changes the H-STAT too.)
3. Align the R, G, and B at the center of the screen with the V-STAT magnets. (*2)
*2: After the V-STAT adjustment, paint on the knobs to lock them.

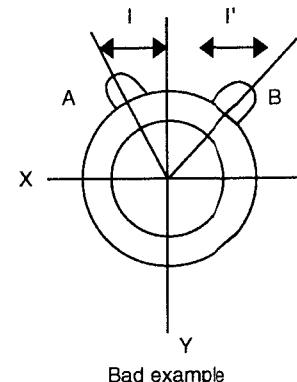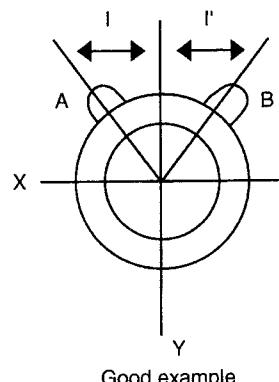

V-STAT magnet knobs
While keeping the angles for A and B equal ($I=I'$), align the vertical convergence.

If the A and B knobs are not symmetrical ($I \neq I'$), this has bad effects. The focus may deteriorate and beam striking may occur.

4. For HMC, use the 6-pole magnet to adjust the R and B dots to be symmetrical left and right about the G dot. (*1)

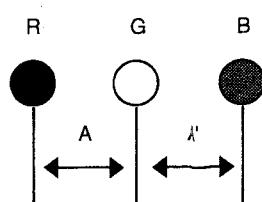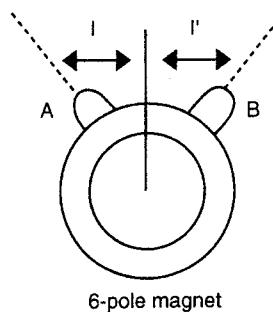

The HMC adjustment changes the opening of the 6-pole magnet.

Adjust the 6-pole magnet so that $A=A'$. You must maintain the relationship $I=I'$ while moving the magnet.

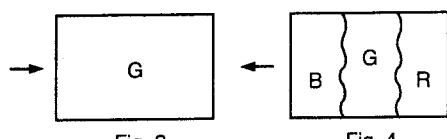
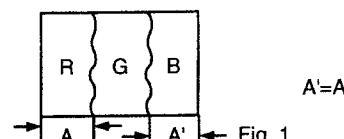


Fig. 2

Fig. 3

Fig. 4

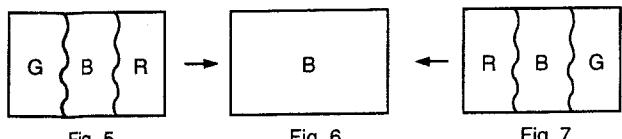


Fig. 5

Fig. 6

Fig. 7

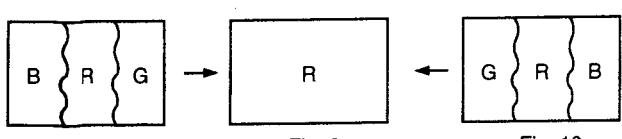



Fig. 8

Fig. 9

Fig. 10

5. For VMC, use the 6-pole magnet to adjust the R and B dots to be symmetrical above and below the G dot. (*2)


*2:

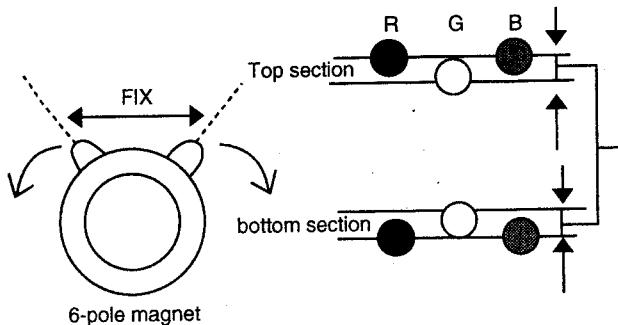


The VMC adjustment does not change the opening of the 6-pole magnet, but turns it left and right. 24 Adjust so that the displacement up and down are the same.

6. Adjust by repeating the adjustments in Items 2 through 5.
(*3)
*3: The above adjustment may affect the landing, so after this adjustment, check the landing again.
7. After the adjustment is complete, paint on the knobs to lock them.

14 inch

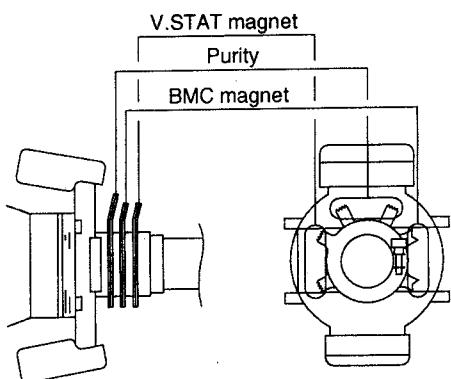

20 inch

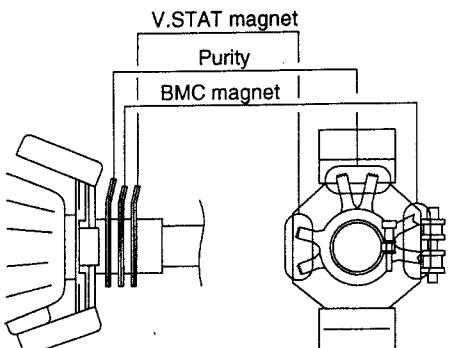


3-7. DEFLECTION YOKE NECK ROTATION ADJUSTMENT


If there is misconvergence at both sides on the X or Y axis of the screen, turn the neck of the deflection yoke in the direction of the arrow to reduce the misconvergence for the entire CRT screen to within the tolerance.

1. Reverse misconvergence pattern


Turn the deflection yoke neck down.

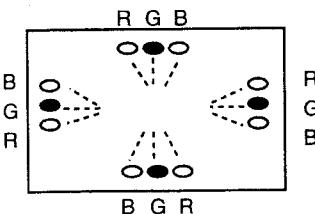



Positive misconvergence pattern
Turn the deflection yoke neck up.

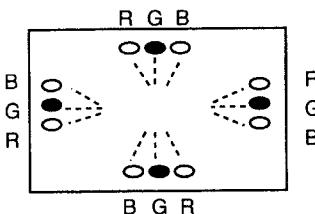

Pattern when deflection yoke too far to the left.




As viewed from the CRT screen, turn the deflection yoke neck to the right.

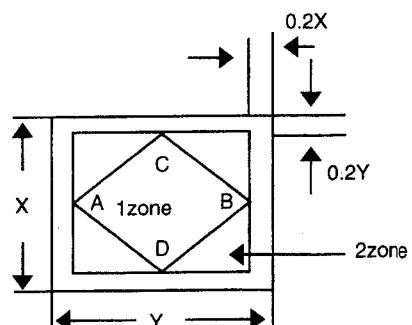


Pattern when deflection yoke too far to the right.

2. Insert the wedges into the DY and CRT funnel face to fix the DY. The number and position of the wedges are shown in the figure below.




Position of 14 inch wedge




Position of 20 inch wedge


3. The pattern below can not be corrected by turning the neck.

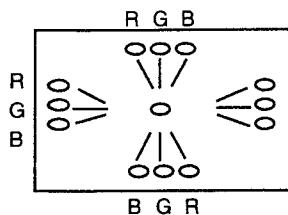

R *Gun rotation
G The beam is twisted at both
B sides on the X axis and Y axis.

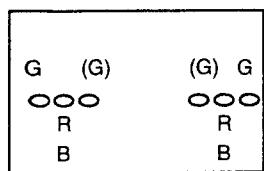

*HCR large (small)
At both sides of the screen the
G raster horizontal component is wider (narrower) than
those of the R and B rasters.

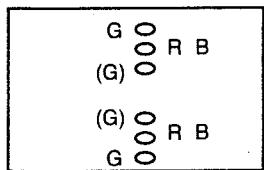

*VCR large (small)
At both sides of the screen,
the G raster vertical component is wider (narrower) than
those of the R and B rasters.

3-8. G2 ADJUSTMENT

1. Input the 625 or 525 all black signal.
2. Select the voltage shown below for each R, G, and B cathodes.
14 inch→DC175.0V
20 inch→DC160.0V
3. Adjust G2 VR so that the raster is slightly luminous.


3-9. WHITE BALANCE ADJUSTMENT

This model performs control of the white balance using the microprocessor.


To adjust the white balance, first adjust the white balance of the actual images using [R C/O], [G C/O], [B C/O], and [R DRIVE], [G DRIVE], [B DRIVE], and then save the four reference data [DRIVE LIMIT], [R REF], [G REF], and [B REF] used for the microprocessor to perform control.

For measuring equipment, use a color analyzer. (for example from Minolta, etc.)

(Figure 1)

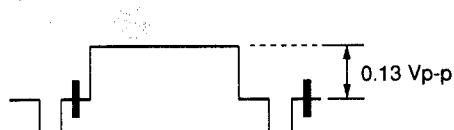

(Figure 2)

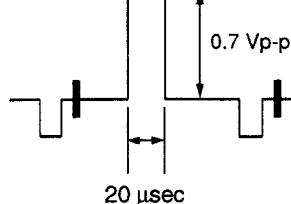


1. Set contrast 50 and other settings to the standard level.
2. Set the LINE-A input.
3. Enter the service mode.
4. Input a gray signal (Figure 1) to LINE-A.
5. Adjust [G C/O] so that the luminance becomes 3 ± 0.2 nit.
6. Adjust [R C/O] and [B C/O] so that the white balance becomes the color temperature shown in Table 2 as below.
7. Repeat 5 to 6 until the luminance and color temperature meet the specification.
8. Input the window signal (Figure 2) to LINE-A.
9. Adjust [G DRIVE] so that the luminance becomes 120 ± 1 nit.
10. Adjust [R DRIVE] and [B DRIVE] so that the white balance becomes the color temperature shown in Figure 2.
11. Repeat 9 to 10 until the luminance and color temperature meet the specification.
12. Cutoff is shifted when drives are changed. Therefore, repeat 4 to 11 for the drive and cutoff until the luminance and color temperature meet the specification.
13. Save the data.

Table 2

Color Temp	D65 ± 1 JND
------------	-------------

14. Press the [ENTER] key once to show the C/O REF screen.

C/O REF Screen

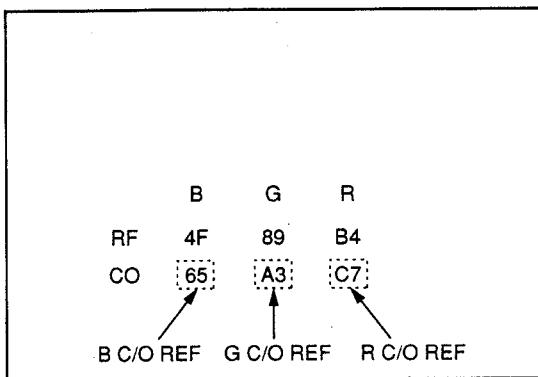

Numeric values are displayed in hexadecimal value.
(Numeric values in the figure are examples.)

15. Check that B C/O REF and G C/O REF and R C/O REF levels gather at the center of 0-FF (hexadecimal value). (Note 1)
(Note 1)
FF (hexadecimal value) – (R C/O REF)=(B C/O REF)

If the level is shifted from the center, press the [ENTER] key three times to return to the adjustment mode, and adjust **DRIVE LIMIT** to return to 14.

When **DRIVE LIMIT** is increased, **X C/O REF** also increases.

16. Save the data.
17. Check the **R C/O REF**, **G C/O REF**, **B C/O REF** values on the C/O REF screen, and note them on a piece of paper, etc. Next, press **ENTER** twice to set the adjustment mode. Change the **R C/O REF**, **G C/O REF**, and **B C/O REF** values to the values checked before, and save them.
18. Save the data.
19. Exit the service mode.
20. Select the RGB input. (Note 2)
(Note 2) Press the [RGB] key for the model with RGB.
Short-circuit between S006 and GND once for the model without RGB (including SSM series).
21. Enter the service mode.
22. Set the values of **R DRIVE**, **G DRIVE** and **B DRIVE** determined in step 9, 10 to **R C/O REF**, **G C/O REF** and **B C/O REF**.
23. Set the values of **R C/O REF**, **G C/O REF**, and **B C/O REF** determined in step 17 to **R C/O REF**, **G C/O REF**, and **B C/O REF**.
24. Save the data.
25. Exit the service mode.
26. Return the input to LINE-A. (Note 3)
(Note 3)
As for the SSM series, press S008 on the board A.

3-10. FOCUS ADJUSTMENT

Note :PVM-14 inch models are adjusted with RV702 on the CA board.

PVM-20 inch models are adjusted with RV on the upper side of the FBT unit.

1. Input a 525 monoscope signal.
2. Adjust the focus to optimize the focus on the characters "30" at the center of the screen.
3. Switch to an all-white signal and check the uniformity.

SECTION 4

SAFTY RELATED ADJUSTMENT

(US Model only)

The following adjustments should always be performed when replacing the following components (marked with **☒**, **■** on the schematic diagram).

Marking Parts (**☒**) C501, C502, C503, C504

Marking Parts (**■**) C317, C318, C501, C502, C503, C504, C507, D102, D103, L505, Q102, R107, R108, R110, R304, R305, R306, R307, T501, IC001, IC301

HOLD-DOWN CIRCUIT VOLTAGE CONFIRMATION

Check Condition Input voltage : $130 \pm 2\text{V}$

Input signal : Monoscope signal

Control : BRT & PIC Normal

+B voltage : less than 116.0VDC

Hold down circuit (Tertiary coil detection voltage)

Confirmatory item : 95.0V (14 inch), 125.0V (20 inch) voltage should be applied to the cathode side of D103.

B+ VOLTAGE CONFIRMATION

Standard : less than 116.0VDC

Check Condition Input voltage : $130 \pm 2\text{VAC}$

Note : Use NF Power Supply or make sure that distortion factor is 3% or less.

Input signal : Monoscope signal

Controls : BRT & PIC Normal


- a) When $I_{ABL} = 600 \pm 50\mu\text{A}$ (14 inch), $1000 \pm 50\mu\text{A}$ (20 inch) raster goes out when applying less than DC $116.0 \pm 0.2\text{V}$ (14 inch), $153.0 \pm 0.2\text{V}$ (20 inch) voltage to the cathode side of D103.

Input signal: ALL white

- b) When $I_{ABL} = 40 \pm 20\mu\text{A}$ (14 inch), $120 \pm 20\mu\text{A}$ (20 inch) raster goes out when applying less than DC $124 \pm 0.2\text{V}$ (14 inch), $153.0 \pm 0.2\text{V}$ (20 inch) voltage to the cathode side of D103.

Input signal : Dot

A BOARD (CONDUCTOR SIDE)

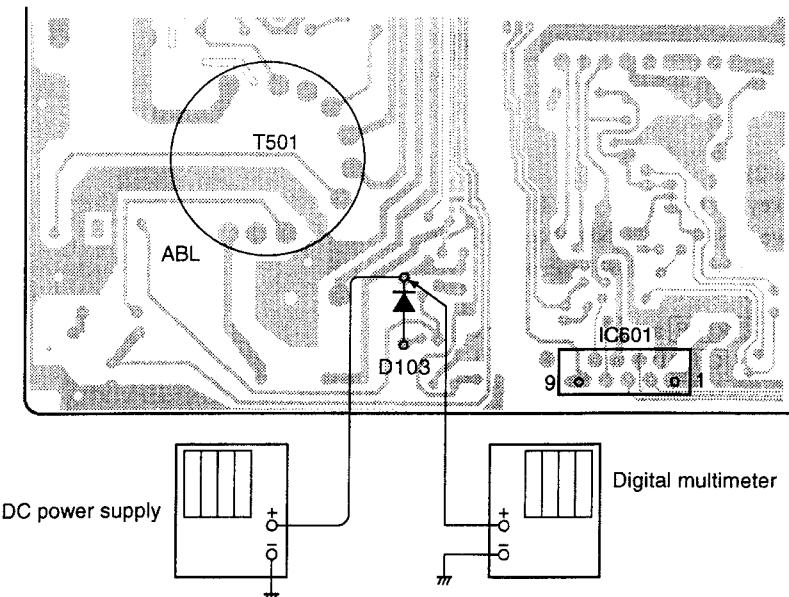

SECTION 5

CIRCUIT ADJUSTMENTS

I. Preparations

* The levels of the signals supplied must be within $\pm 2\%$ of the standard on the right.

Signal		Signal Contents	Standard Level (Pedestal-White)
COMPOSITE VIDEO (75% COLOR BAR)	358NT 443NT	100% WHITE	0.714V
		75% WHITE	0.536V
		BURST (GREEN) (This item only P-P)	286mV (632mV)
	PAL SECAM	100% WHITE	0.7V
		75% WHITE	0.525V
		PAL BURST (GREEN) (This item only P-P)	300mV (664mV)

II. Deflection System Adjustment

1. VERTICAL DEFLECTION SECTION Adjustment

The 16:9 mode is available only for the RGB model.

NORMAL V. SIZE Standards

	525 SPCB	625SPCB
4 : 3	12.8 ± 0.2 frames	12.8 ± 0.3 frames
16:9	14inch	157mm 
	20inch	221mm 

1. Input a 525 special color bar signal.
2. Set :
 - CONTRAST 60%
 - BRIGHTNESS STD
3. Put the unit into service mode.
4. Roughly adjust SIZE to 12 frames with [V.SIZE].
 Adjust V.LIN with [V.LINE UP] and [V.LINE DOWN].
 Adjust V.CENT with [V.CENT]. (Refer to Note 1.)
 Set SIZE to the specified value with [V.SIZE].
5. Make sure that V.SIZE meets the specified value.
6. Select the 16:9 mode.
7. Make sure that V.SIZE meets the specified value of the 16:9 mode.
8. Select the 4:3 mode.
9. Input the 625 special color bar signal.
10. Make sure that V.SIZE meets the specified value.
11. Select the 16:9 mode.
12. Make sure that V.SIZE meets the specified value of the 16:9 mode.
 (Note 1) Adjust V.CENT and V.SIZE again after V.LIN is adjusted.

2. HORIZONTAL DEFLECTION SECTION ADJUSTMENT


The 16:9 mode is available only for the model with RGB.

1. Input a 525 special color bar signal.
2. Set :
 - CONTRAST 60%
 - BRIGHTNESS STD
3. Put the unit into service mode.
4. Roughly adjust [H. SIZE] so that the H. SIZE is 16 frames.
5. Adjust the horizontal deflection section with [PIN AMP], [PIN PHASE], [H. COR PIN], [H. SEXY PIN] and [H. SIZE].
 (Adjust so that horizontal and vertical lines on the screen become a straight line while compensating the bow distortion.)
6. Select the 16:9 mode.
7. Make sure that there is no distortion on the screen.
8. Input the 625 special color bar signal.
9. Make sure that there is no distortion on the screen for both the 4:3 and 16:9 modes.

NORMAL H. SIZE standards

	525 SPCB	625 SPCB
4:3	16.8 ± 0.2 frames	16.8 ± 0.3 frames
16:9	16.8 ± 0.2 frames	16.8 ± 0.3 frames


PIN-AMP (No. 52)




PIN-PHASE (No. 51)



H.COR PIN (No. 54)



H.SEXY PIN (No. 53)



III. Signal System Adjustment

1. VIDEO OUT level Adjustment


Serial No. 6000222 and Higher (PVM-14N1A)
 Serial No. 6003700 and Higher (PVM-14N1E)
 Serial No. 6000001 and Higher (PVM-14N1MDE)
 Serial No. 6003584 and Higher (PVM-14N1U)
 Serial No. 6000097 and Higher (PVM-14N2A)
 Serial No. 6002486 and Higher (PVM-14N2E)
 Serial No. 6002320 and Higher (PVM-14N2U)
 Serial No. 6002356 and Higher (SSM-14N1E)
 Serial No. 6002572 and Higher (SSM-14N1U)
 Serial No. 6000092 and Higher (PVM-20N1A)
 Serial No. 6000924 and Higher (PVM-20N1E)
 Serial No. 6001488 and Higher (PVM-20N1U)
 Serial No. 6000049 and Higher (PVM-20N2A)
 Serial No. 6000799 and Higher (PVM-20N2E)
 Serial No. 6000848 and Higher (PVM-20N2U)
 Serial No. 6001086 and Higher (SSM-20N1E)
 Serial No. 6000968 and Higher (SSM-20N1U)

Only the set of IC version 2.00 can perform this adjustment.

1. Input the NTSC color bar signal to the VIDEO IN of LINE-A.
2. Enter the service mode, and set the adjusting data as the setting below.

NO.	DISP.	DATA
26	BCLG	800
37	G DRIVE	0
40	G C/O	1FF

3. Connect the probe of the oscilloscope to the Q358 emitter.
4. Adjust [DA TRIM] so that the voltage (OUTPUT level) will become as below.

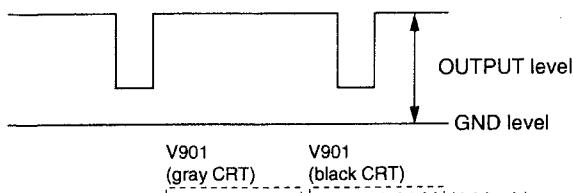


$$\text{OUTPUT level} = [2.11 \pm 0.01 \text{ V}] [2.50 \pm 0.01 \text{ V}] \text{ (14 inch)}$$

$$\text{OUTPUT level} = [3.04 \pm 0.01 \text{ V}] [3.34 \pm 0.01 \text{ V}] \text{ (20 inch)}$$

- Refer to SECTION 8. Electrical Parts List on page 71 for the serial numbers of V901 (CRT).
5. After the adjustment, set the adjusting data of [B CLG], [G DRIVE] and [G C/O] to the default data, then save the data.
 6. Exit the service mode.

2. NTSC COLOR DEMODULATION Adjustment

1. Input the NTSC color bar signal.
2. Select COLOR SELECT is NTSC COMB.
3. Connect the probe of the oscilloscope to Q353 emitter.
4. Adjust the contrast so that the first amplitude becomes $1.0 \pm 0.5 \text{ V}$.

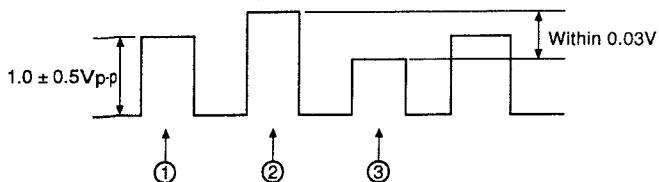


5. Enter the service mode.
6. Adjust [TINT] so that the height difference between the 2nd peak and the 3rd peak is less than 0.03V.
7. Save the data.
8. Exit the service mode.

3. ANALOG RGB MAX CONTRAST ADJUSTMENT


The adjustment also alters the brightness of OSD.

1. Input a window signal to the LINE-A and the GREEN of RGB. (Note 1)

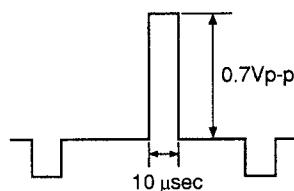


2. Set contrast MAX and other settings to the standard level.
 3. Connect the probe of the oscilloscope to the Q357 emitter.
 4. Adjust [RGB CONT] so that the amplitude of image becomes the same when LINE-A or RGB is selected.
 5. Save the data.
- (Note 1) For the model without RGB, connect pin ① of CN401 (A board) and pin ③ of CN802 (S board) with a wire rod.
6. Exit the service mode.

A BOARD (COMPONENT SIDE)

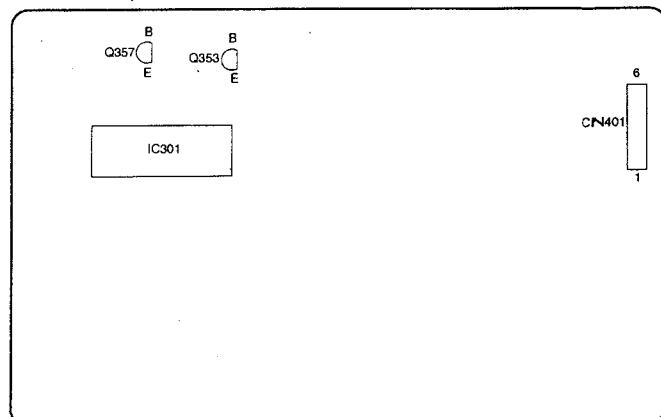


S BOARD (COMPONENT SIDE)

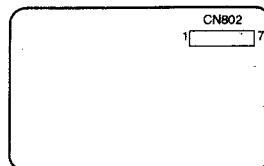


SECTION 6

DIAGRAMS


6-1. BLOCK DIAGRAM (1)

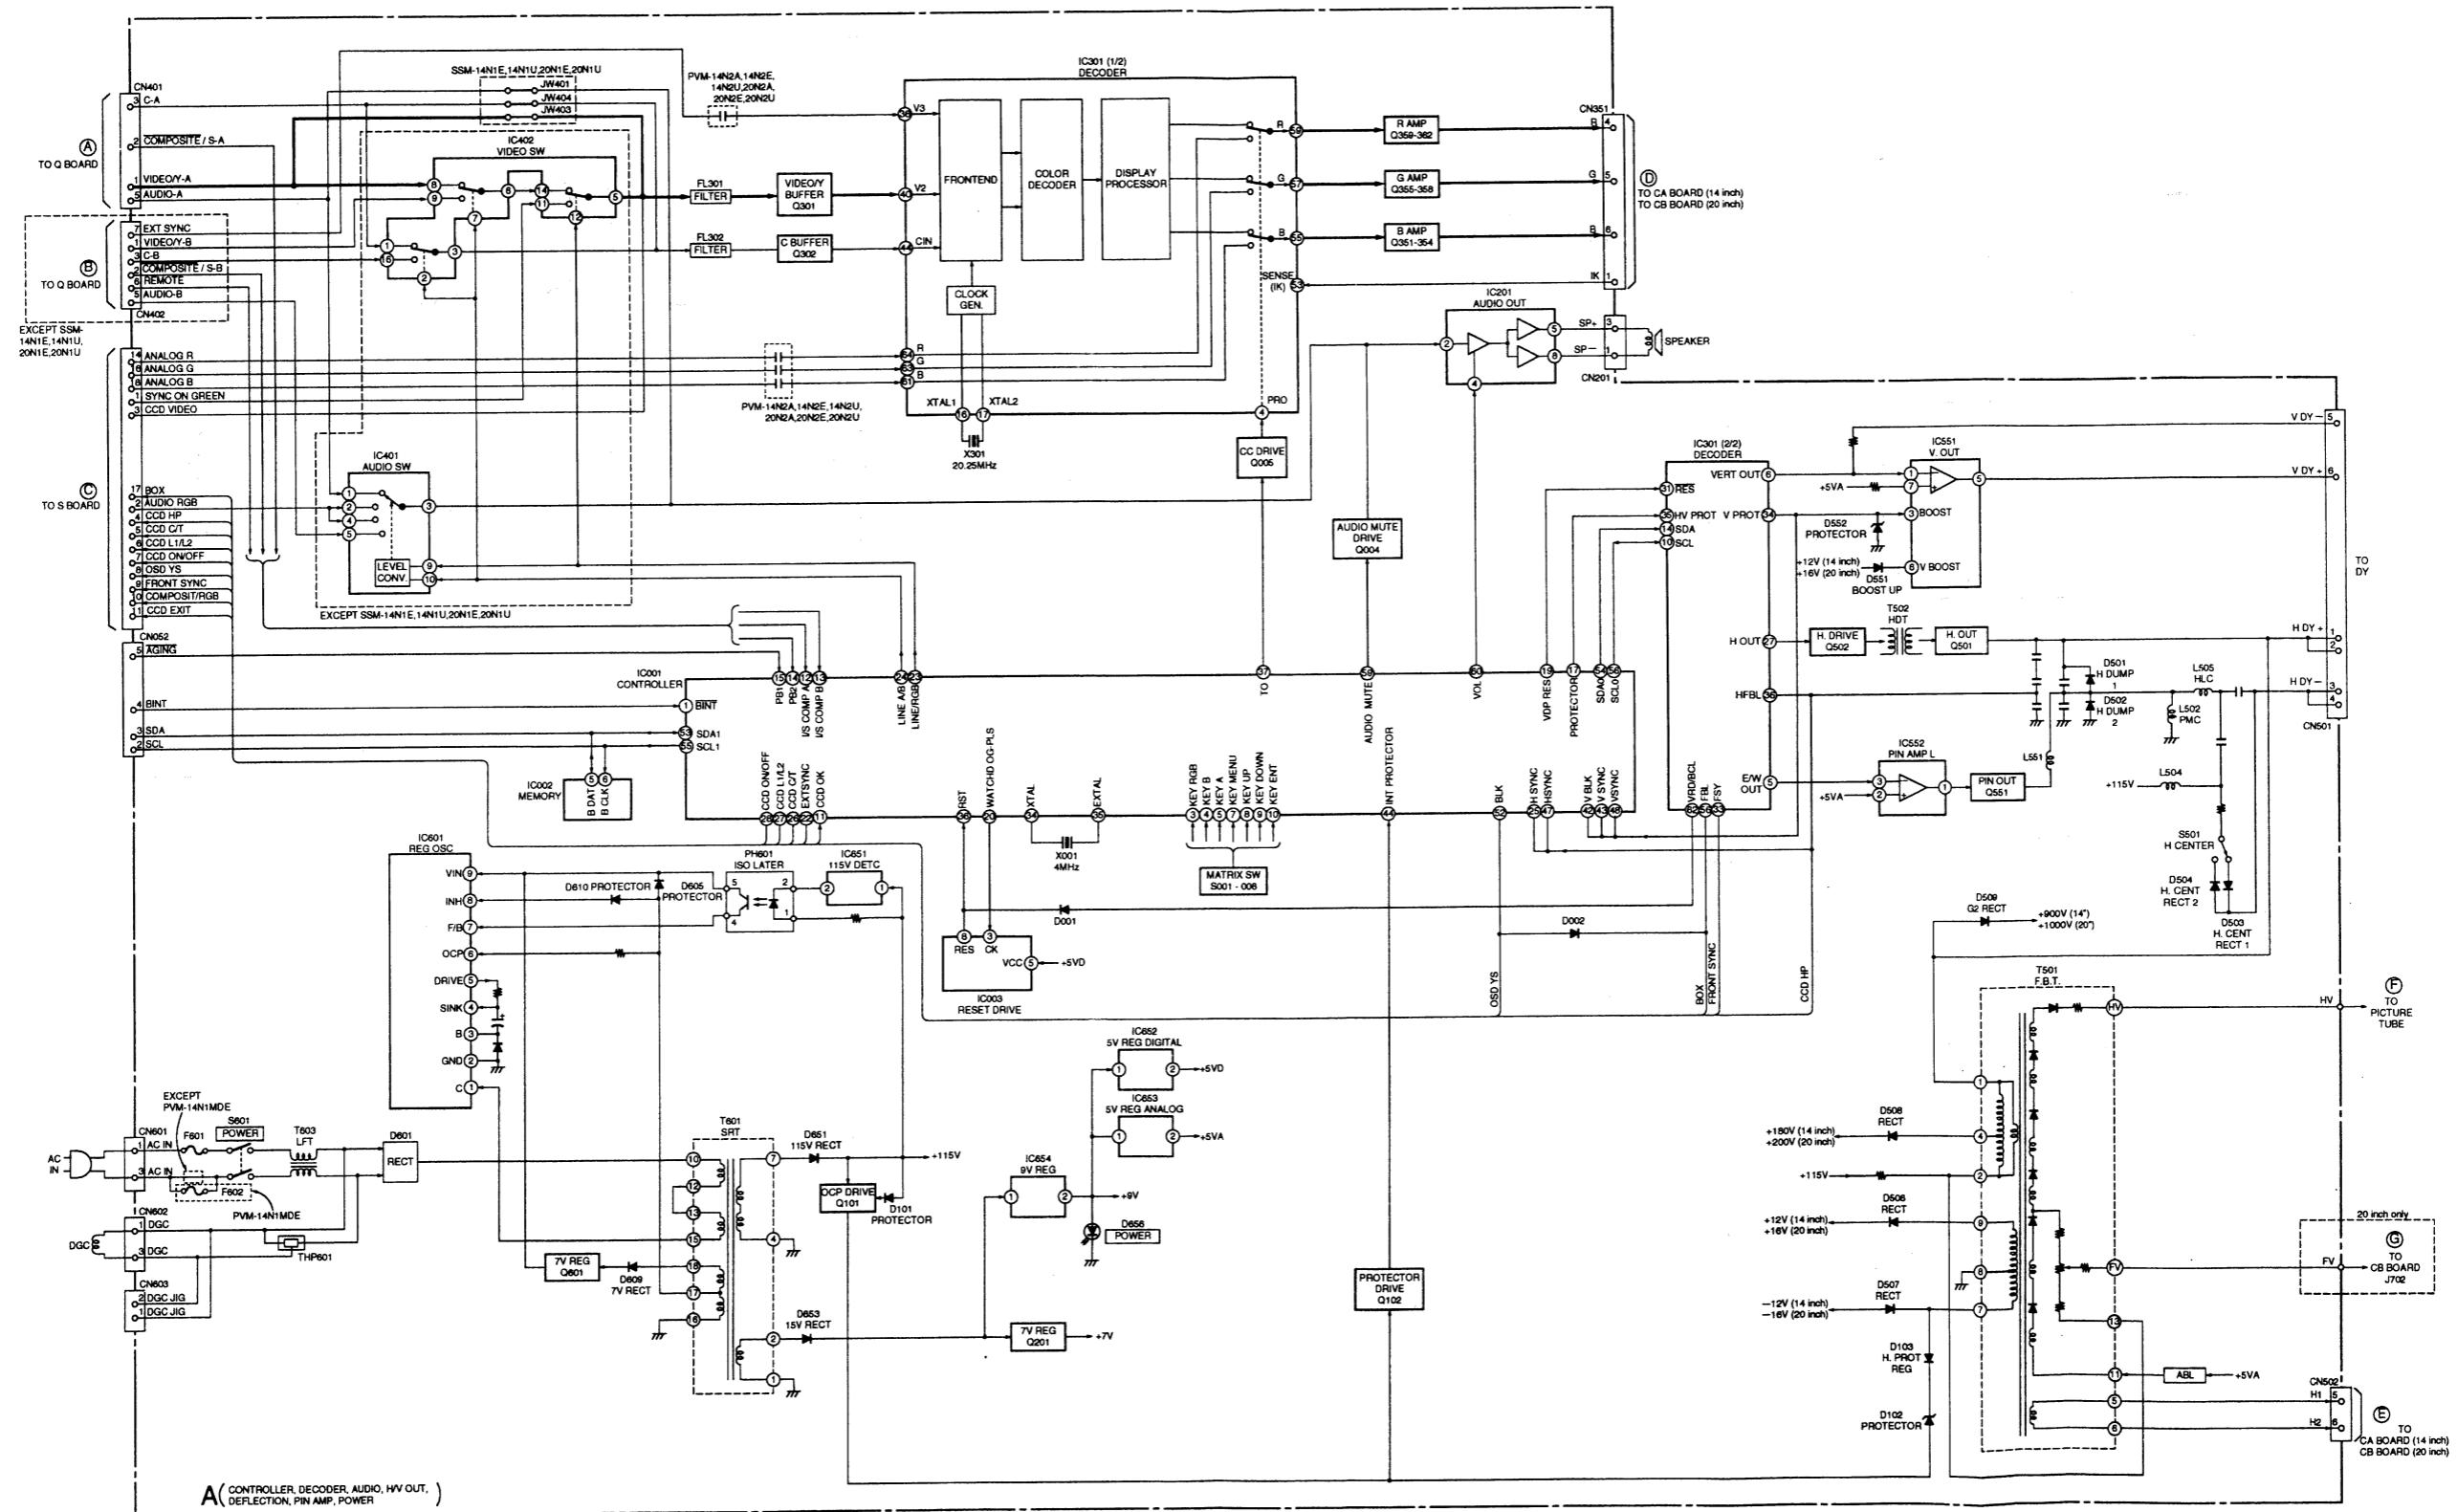


BLOCK DIAGRAM (2)

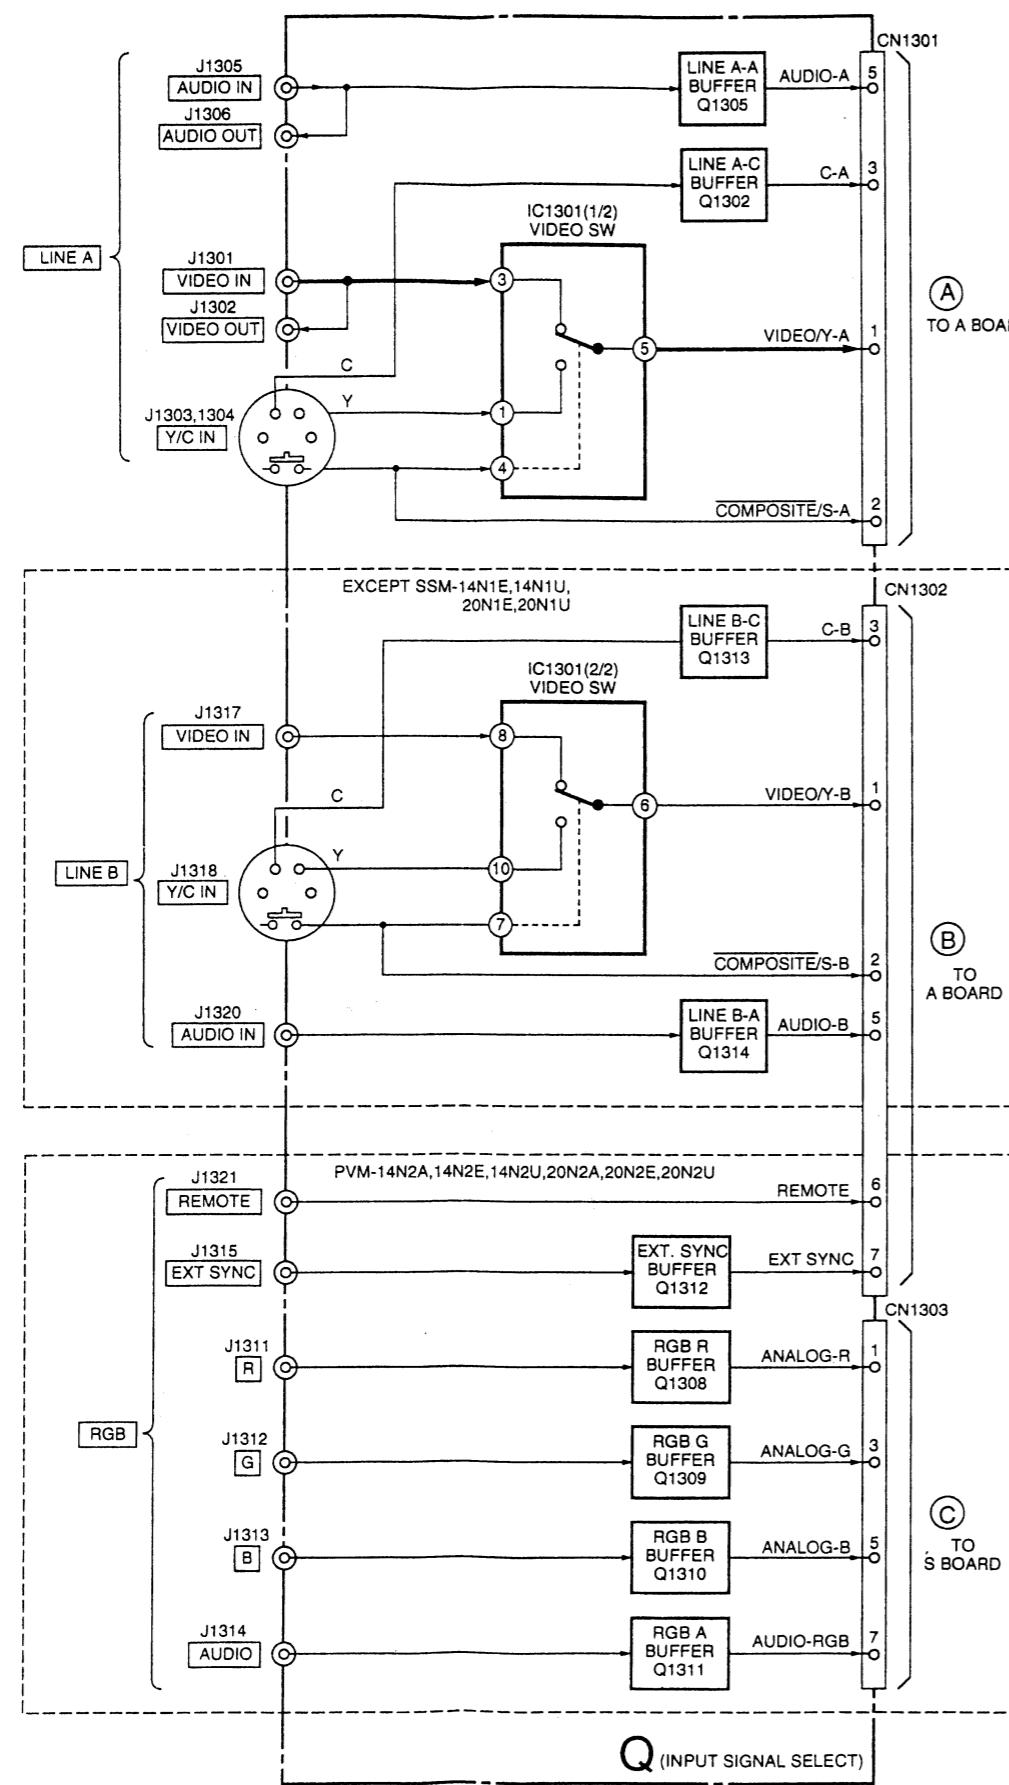


BLOCK DIAGRAM (3)

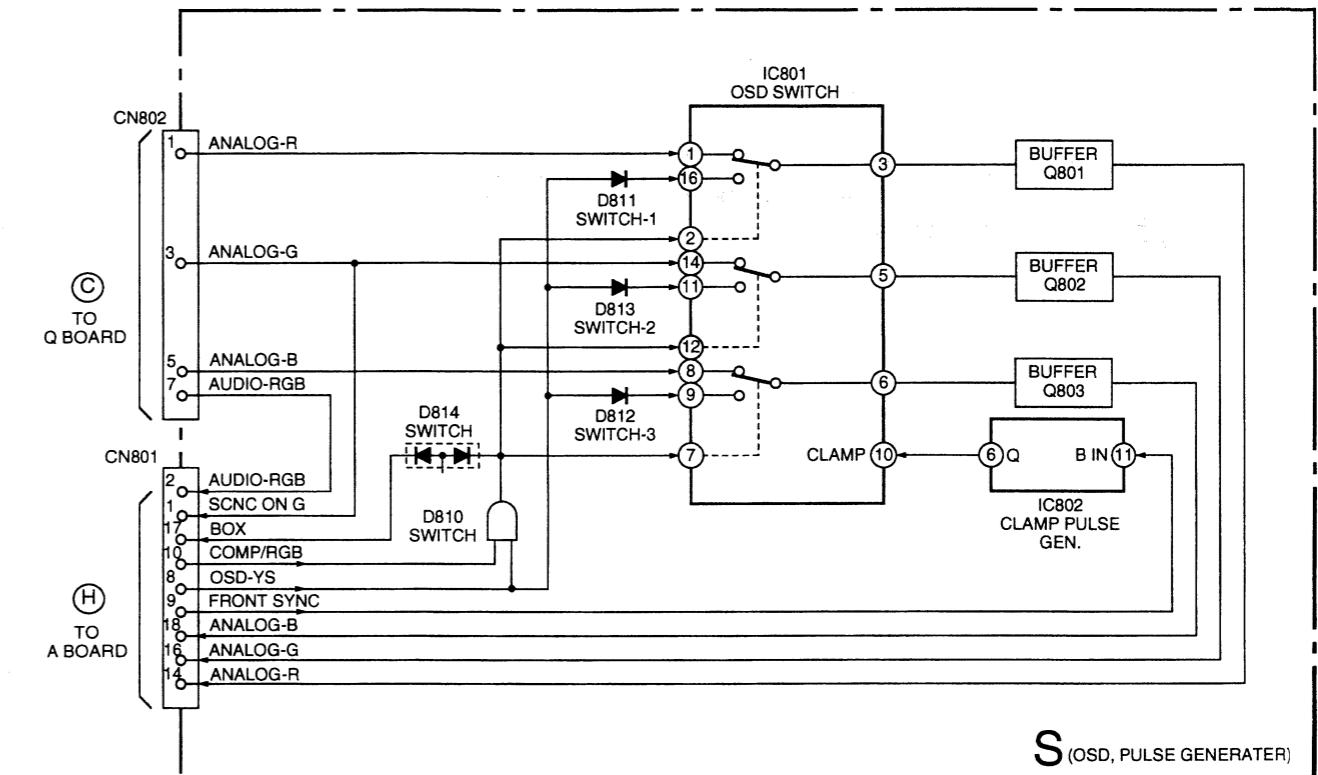


BLOCK DIAGRAM (4)

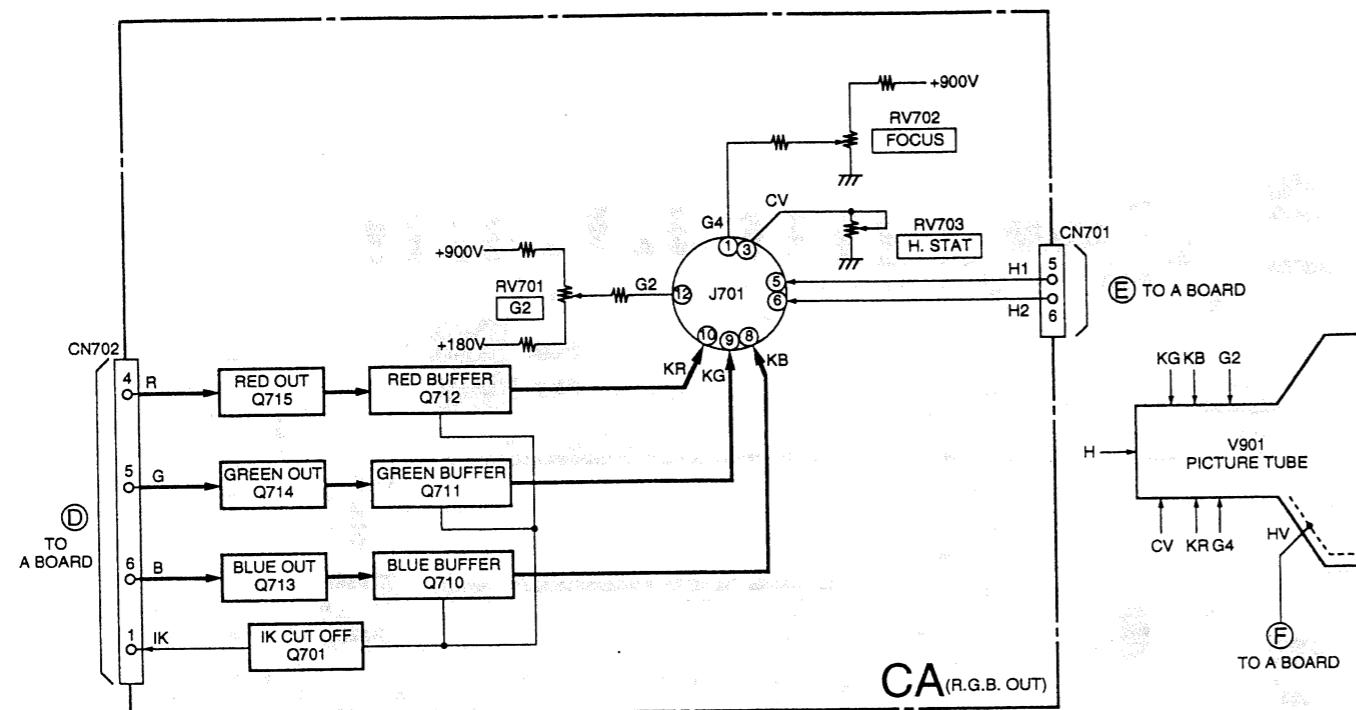

BLOCK DIAGRAM (5)

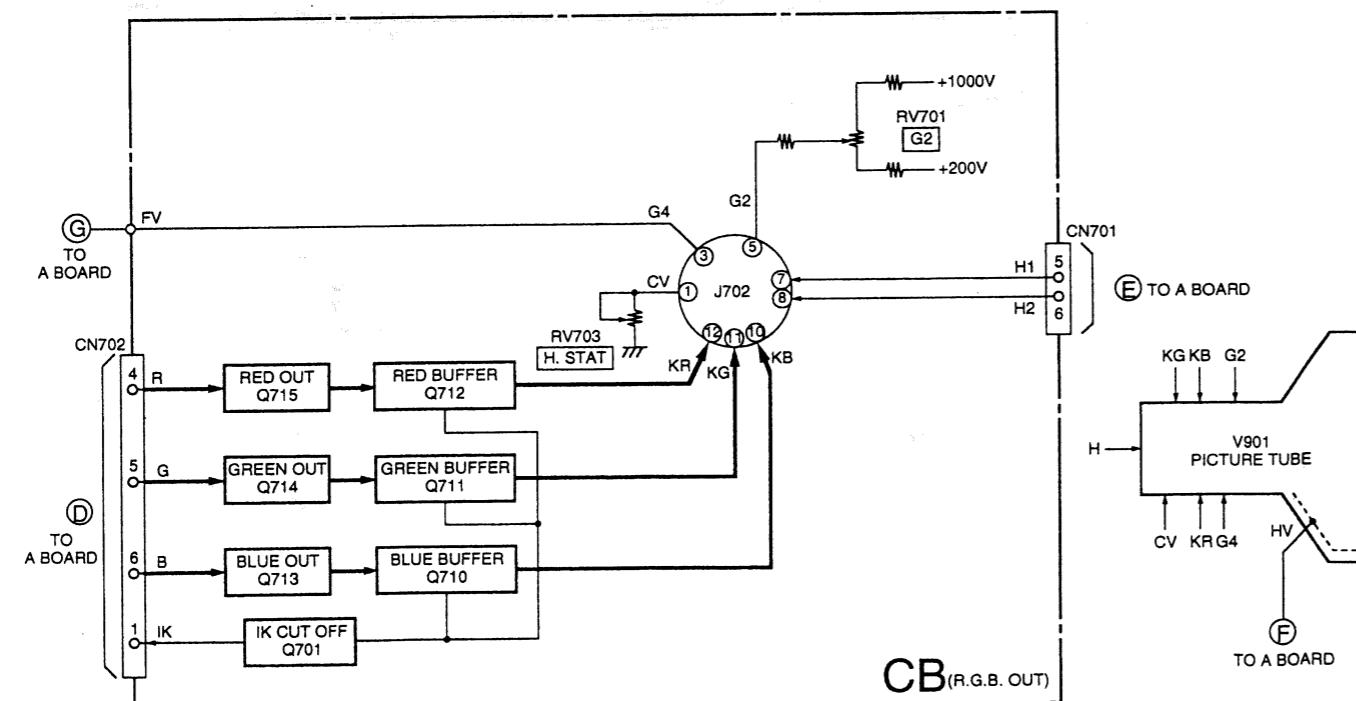

6-2. CIRCUIT BOARDS LOCATION

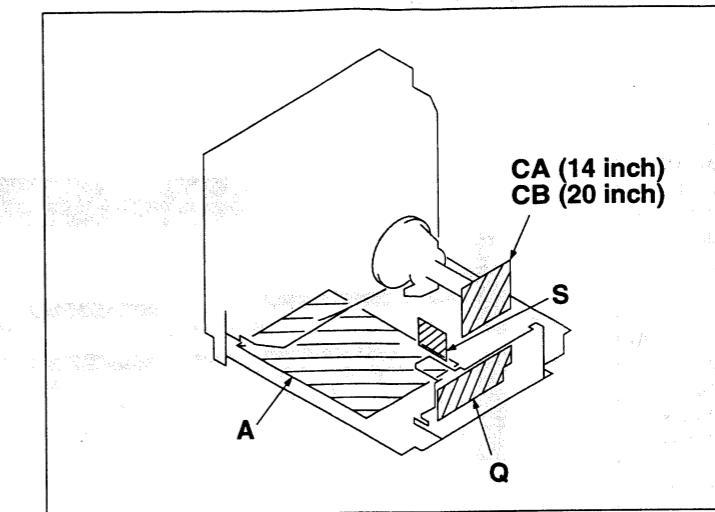

6-3. PRINTED WIRING BOARDS AND SCHEMATIC DIAGRAMS

Note:

- All capacitors are in μF unless otherwise noted. pF : μF 50WV or less are not indicated except for electrolytics.
- All electrolytics are in 50V unless otherwise specified.
- All resistors are in ohms, 1/4W in resistance, 1/10W in chip resistance.
- $\text{k}\Omega=1000\Omega$, $\text{M}\Omega=1000\text{k}\Omega$
- :nonflammable resistor.
- :internal component.
- :panel designation and adjustment for repair.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- The components identified by in this basic schematic diagram have been carefully factory-selected for each set in order to satisfy regulations regarding X-ray radiation.
- When replacing components identified by , make the necessary adjustments indicated. If results do not meet the specified value, change the component identified by and repeat the adjustment until the specified value is achieved.
- When replacing the part in below table, be perform the related adjustment.

Note: The components identified by shading and mark are critical for safety. Replace only with part number specified.


Note: Les composants identifiés par un trame et une matque sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié

- All voltage are in V.
- Voltage are dc with respect to ground unless otherwise noted.
- Readings are taken with a color-bar signal input.
- Voltage variations may be noted due to normal production tolerances.
- :B+bus.
- :B-bus.
- :Signal path.
- No mark : 14 inch
() : 20 inch

Reference Information

Part replaced ()	Adjustment ()
C317, C318, C501, C502, C503, C504, C507, D102, D103, L505, Q102, R107, R108, R110, R304, R305, R306, R307, T501, IC001, IC301	C501, C502, C503, C504

RESISTOR:RN METAL FILM
 :RC SOLID
 :FPRD NONFLAMMABLE CARBON
 :FUSE NONFLAMMABLE FUSIBLE
 :RW NONFLAMMABLE WIREWOUND
 :RS NONFLAMMABLE METAL OXIDE
 :RB NONFLAMMABLE CEMENT
 COIL :LF-8L MICRO INDUCTOR
 CAPACITOR :TA TANTALUM
 :PS STYROL
 :PP POLYPROPYLENE
 :PT MYLAR
 :MPS METALIZED POLYESTER
 :MPP METALIZED POLYPROPYLENE
 :ALB BIPOLAR
 :ALT HIGH TEMPERATURE
 :ALR HIGH RIPPLE

ACONTROLLER, DECODER, AUDIO, H/V OUT,
DEFLECTION, PIN AMP, POWER**- A BOARD -****NOTE:**


The circuit indicated as left contains high voltage of over 600 Vp-p. Care must be paid to prevent an electric shock in inspection or repairing.


(L) HAND AND PLIERS

Serial No. 6000001 to 6000221 (PVM-14N1A)
 Serial No. 6000001 to 6003699 (PVM-14N1E)
 Serial No. 6000001 to 6003583 (PVM-14N1U)
 Serial No. 6000001 to 6000096 (PVM-14N2A)
 Serial No. 6000001 to 6002485 (PVM-14N2E)
 Serial No. 6000001 to 6002319 (PVM-14N2U)
 Serial No. 6000001 to 6002355 (SSM-14N1E)
 Serial No. 6000001 to 6002571 (SSM-14N1U)
 Serial No. 6000001 to 6000091 (PVM-20N1A)
 Serial No. 6000001 to 6000923 (PVM-20N1E)
 Serial No. 6000001 to 6001487 (PVM-20N1U)
 Serial No. 6000001 to 6000048 (PVM-20N2A)
 Serial No. 6000001 to 6000798 (PVM-20N2E)
 Serial No. 6000001 to 6000847 (PVM-20N2U)
 Serial No. 6000001 to 6001085 (SSM-20N1E)
 Serial No. 6000001 to 6000967 (SSM-20N1U)


A BOARD

IC	DIODE
IC001 E-10	D001 C-11
IC002 C-11	D002 B-11
IC003 D-11	D101 E-6
IC201 A-6	D102 E-6
IC301 C-9	D103 H-4
IC401 B-3	D201 B-7
IC402 B-2	D501 F-1
IC551 B-6	D502 E-1
IC552 B-4	D503 C-1
IC601 I-5	D504 C-1
IC651 E-5	D505 C-8
IC652 C-7	D506 I-2
IC653 D-6	D507 H-4
IC654 C-6	D508 F-3
TRANSISTOR	
Q004 A-7	D601 G-9
Q005 C-11	D605 G-5
Q101 D-6	D606 I-6
Q102 E-7	D607 I-7
Q201 B-7	D609 H-5
Q301 B-10	D610 G-5
Q302 B-10	D651 E-8
Q351 A-9	D653 E-5
Q352 A-9	D656 H-12

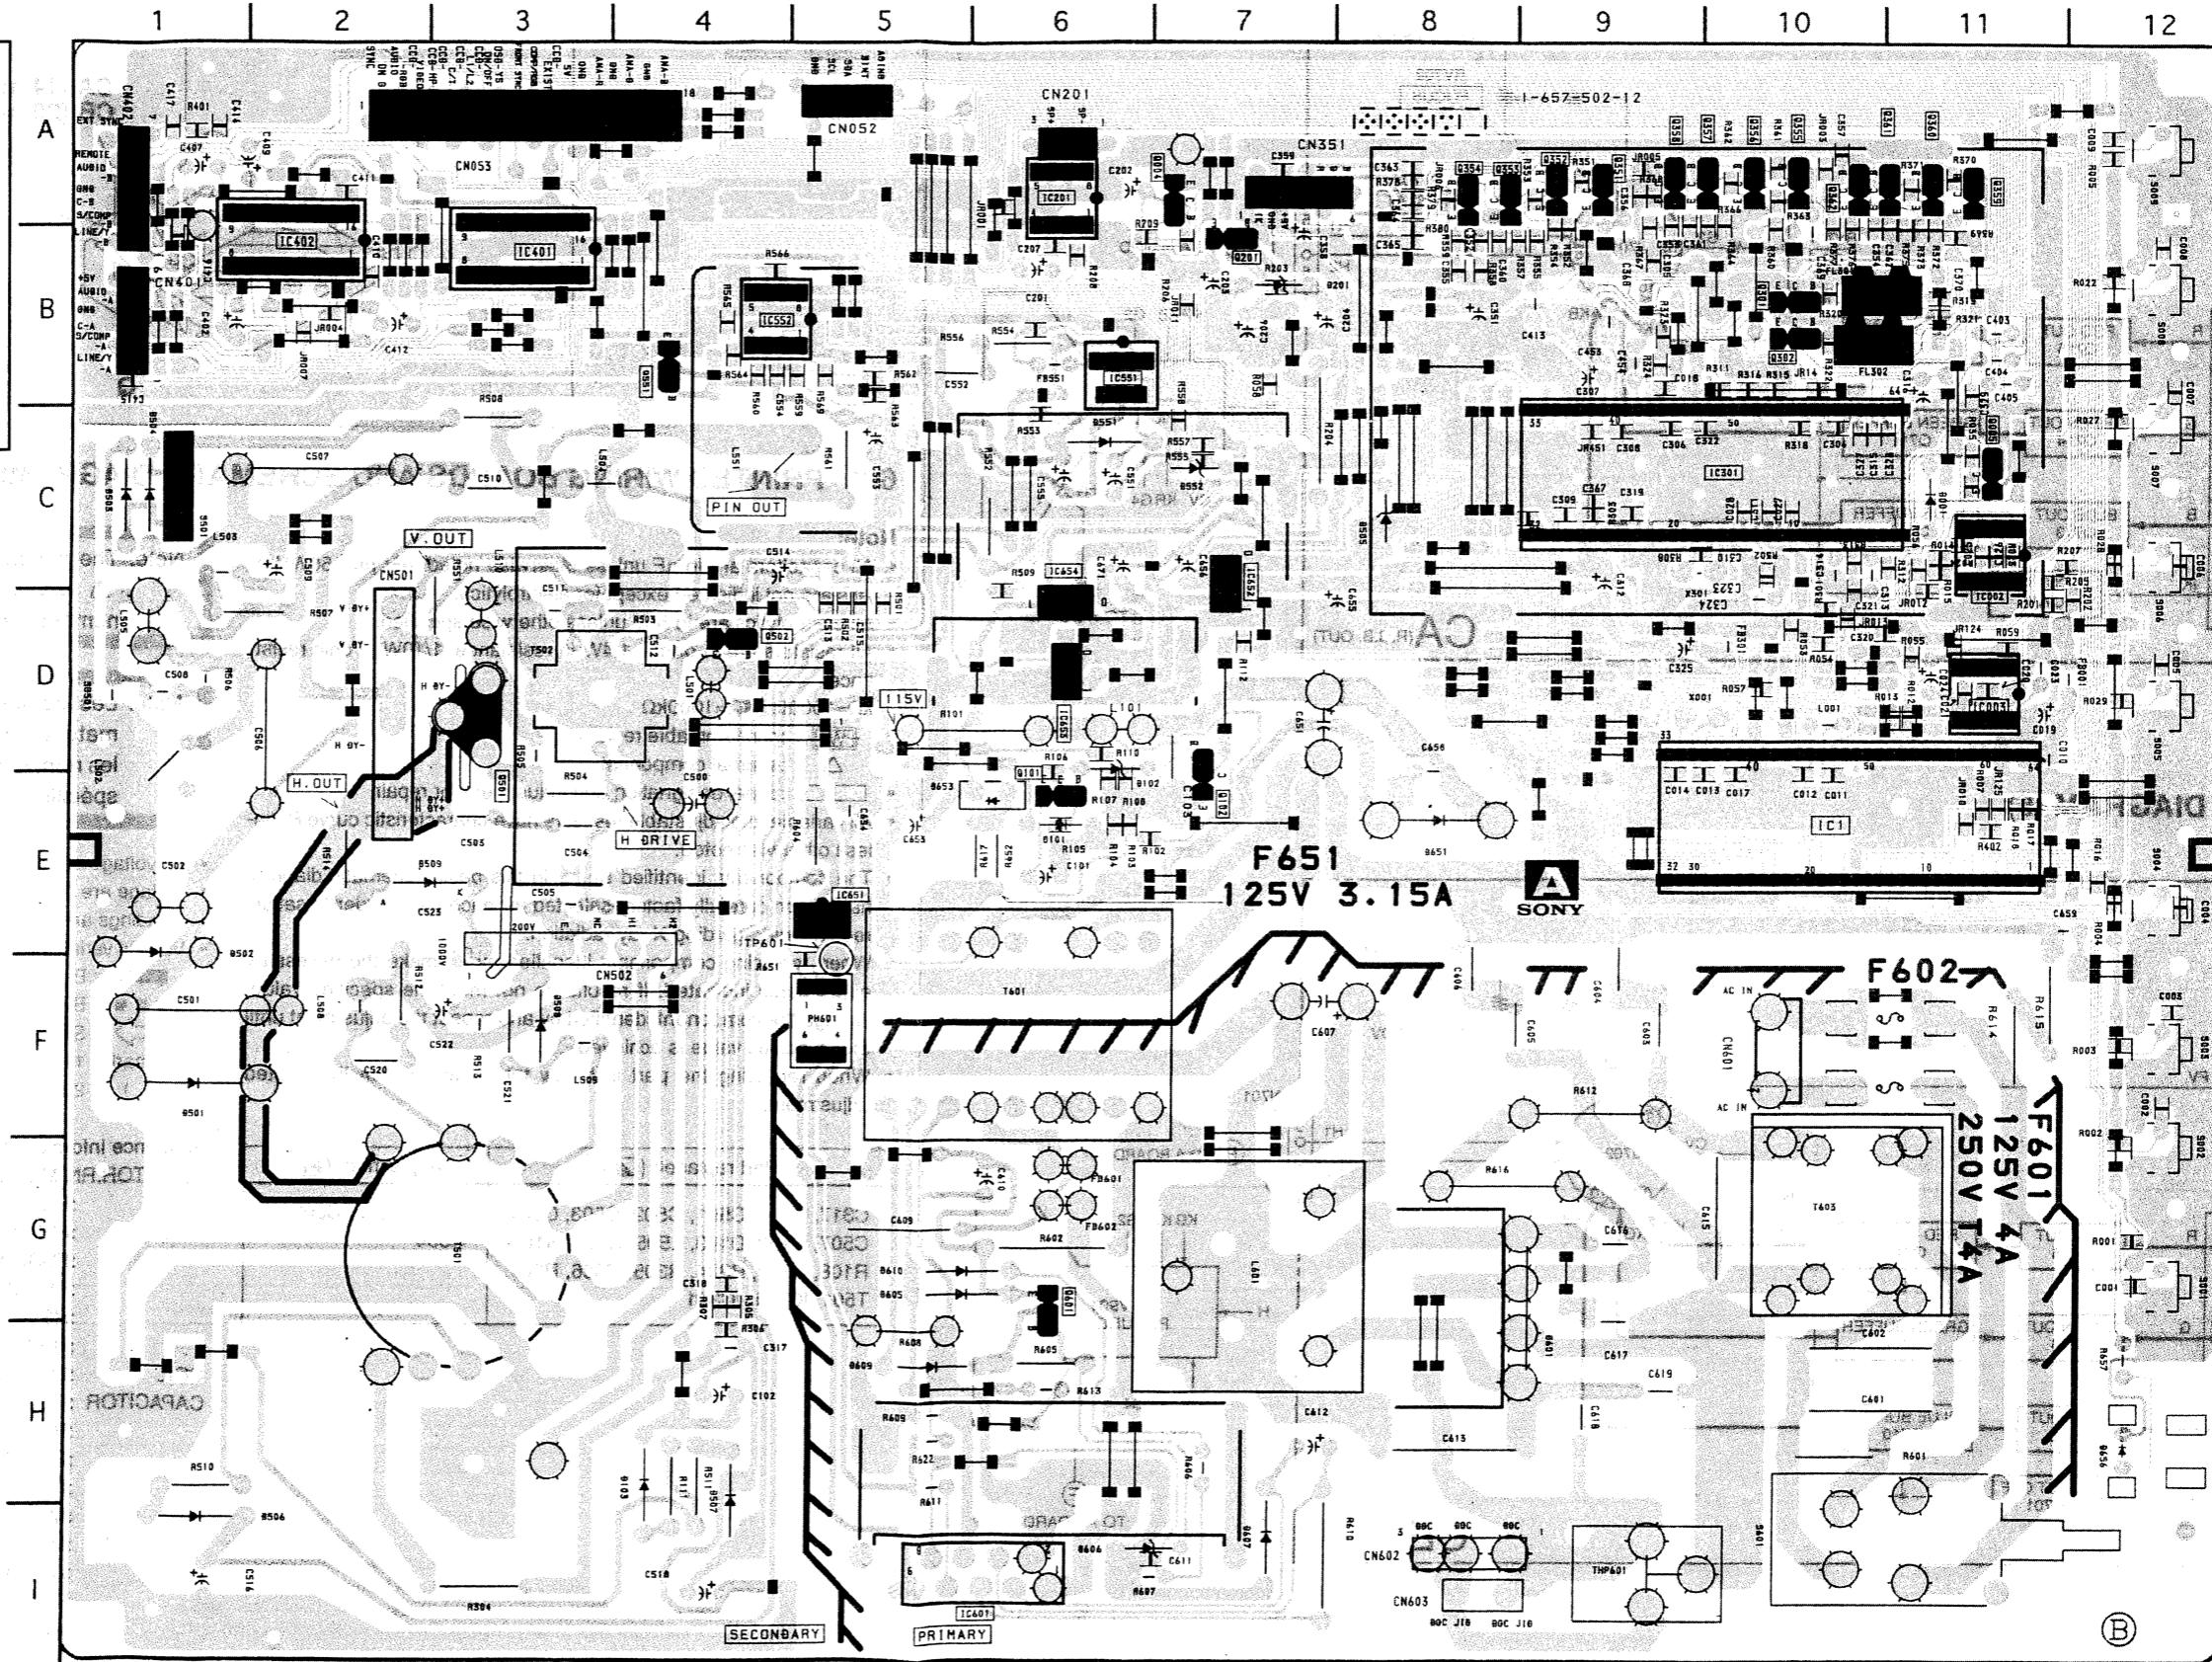






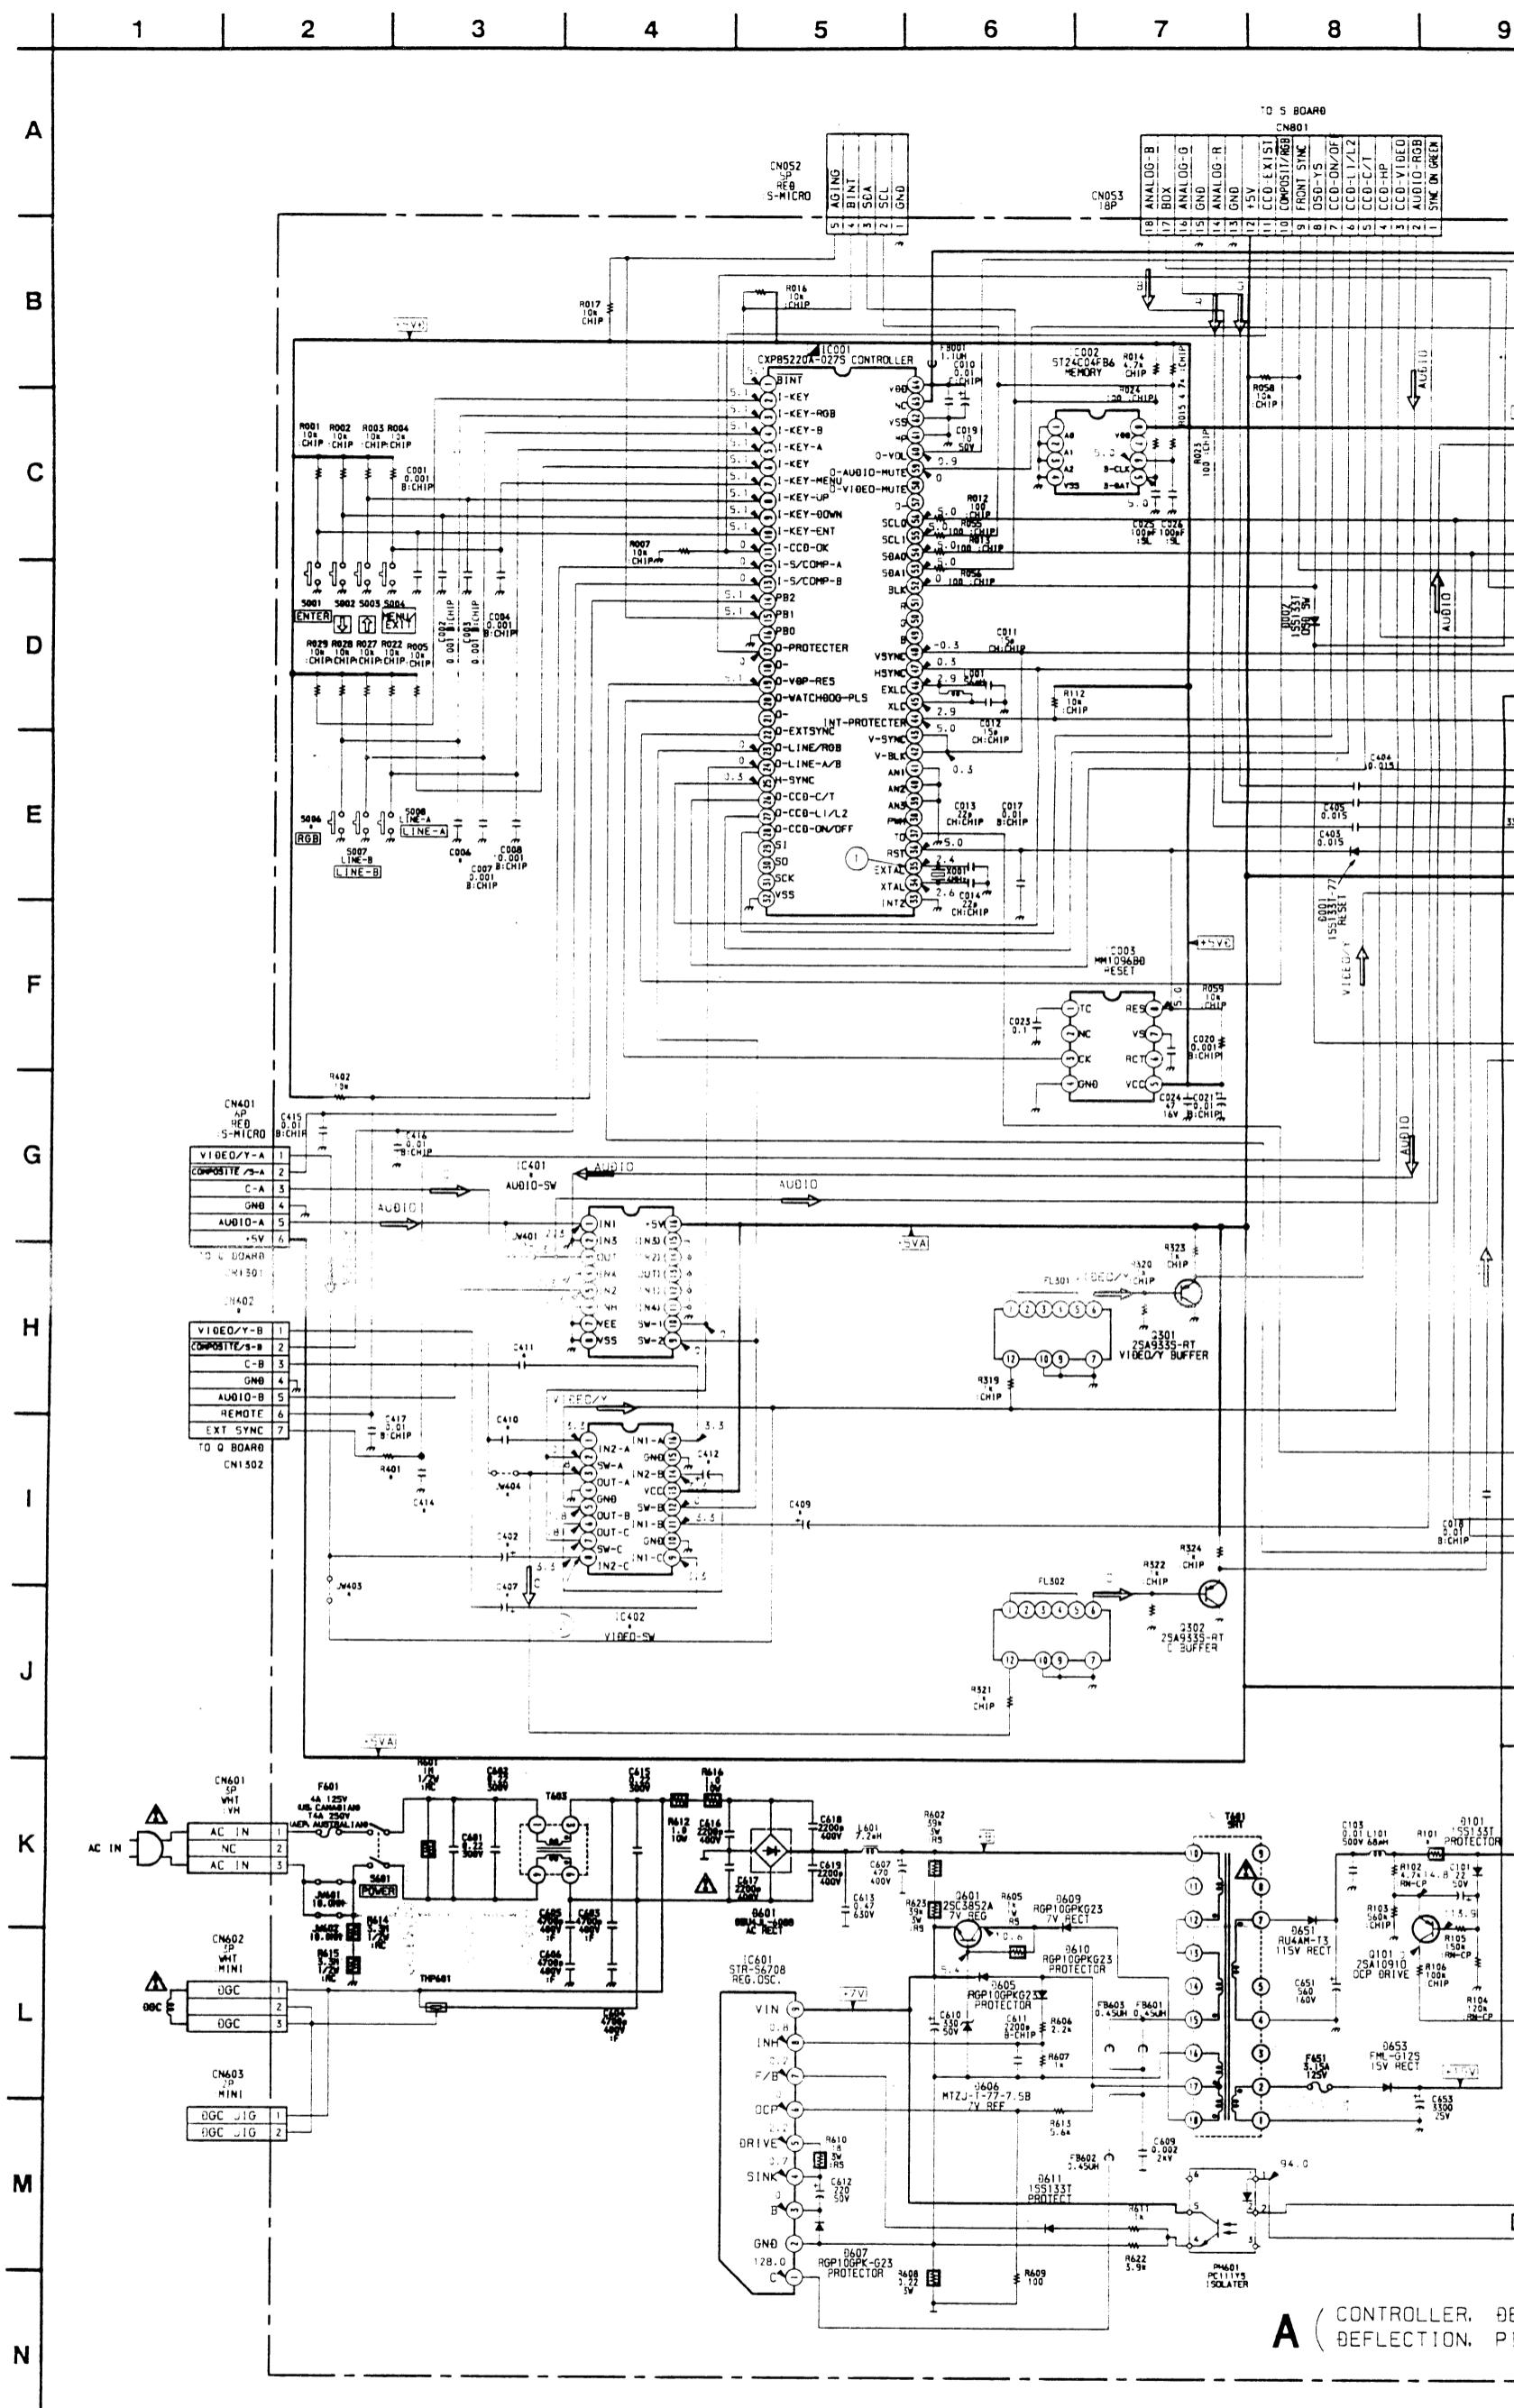


A (CONTROLLER, DECODE
DEFLECTION, PIN A

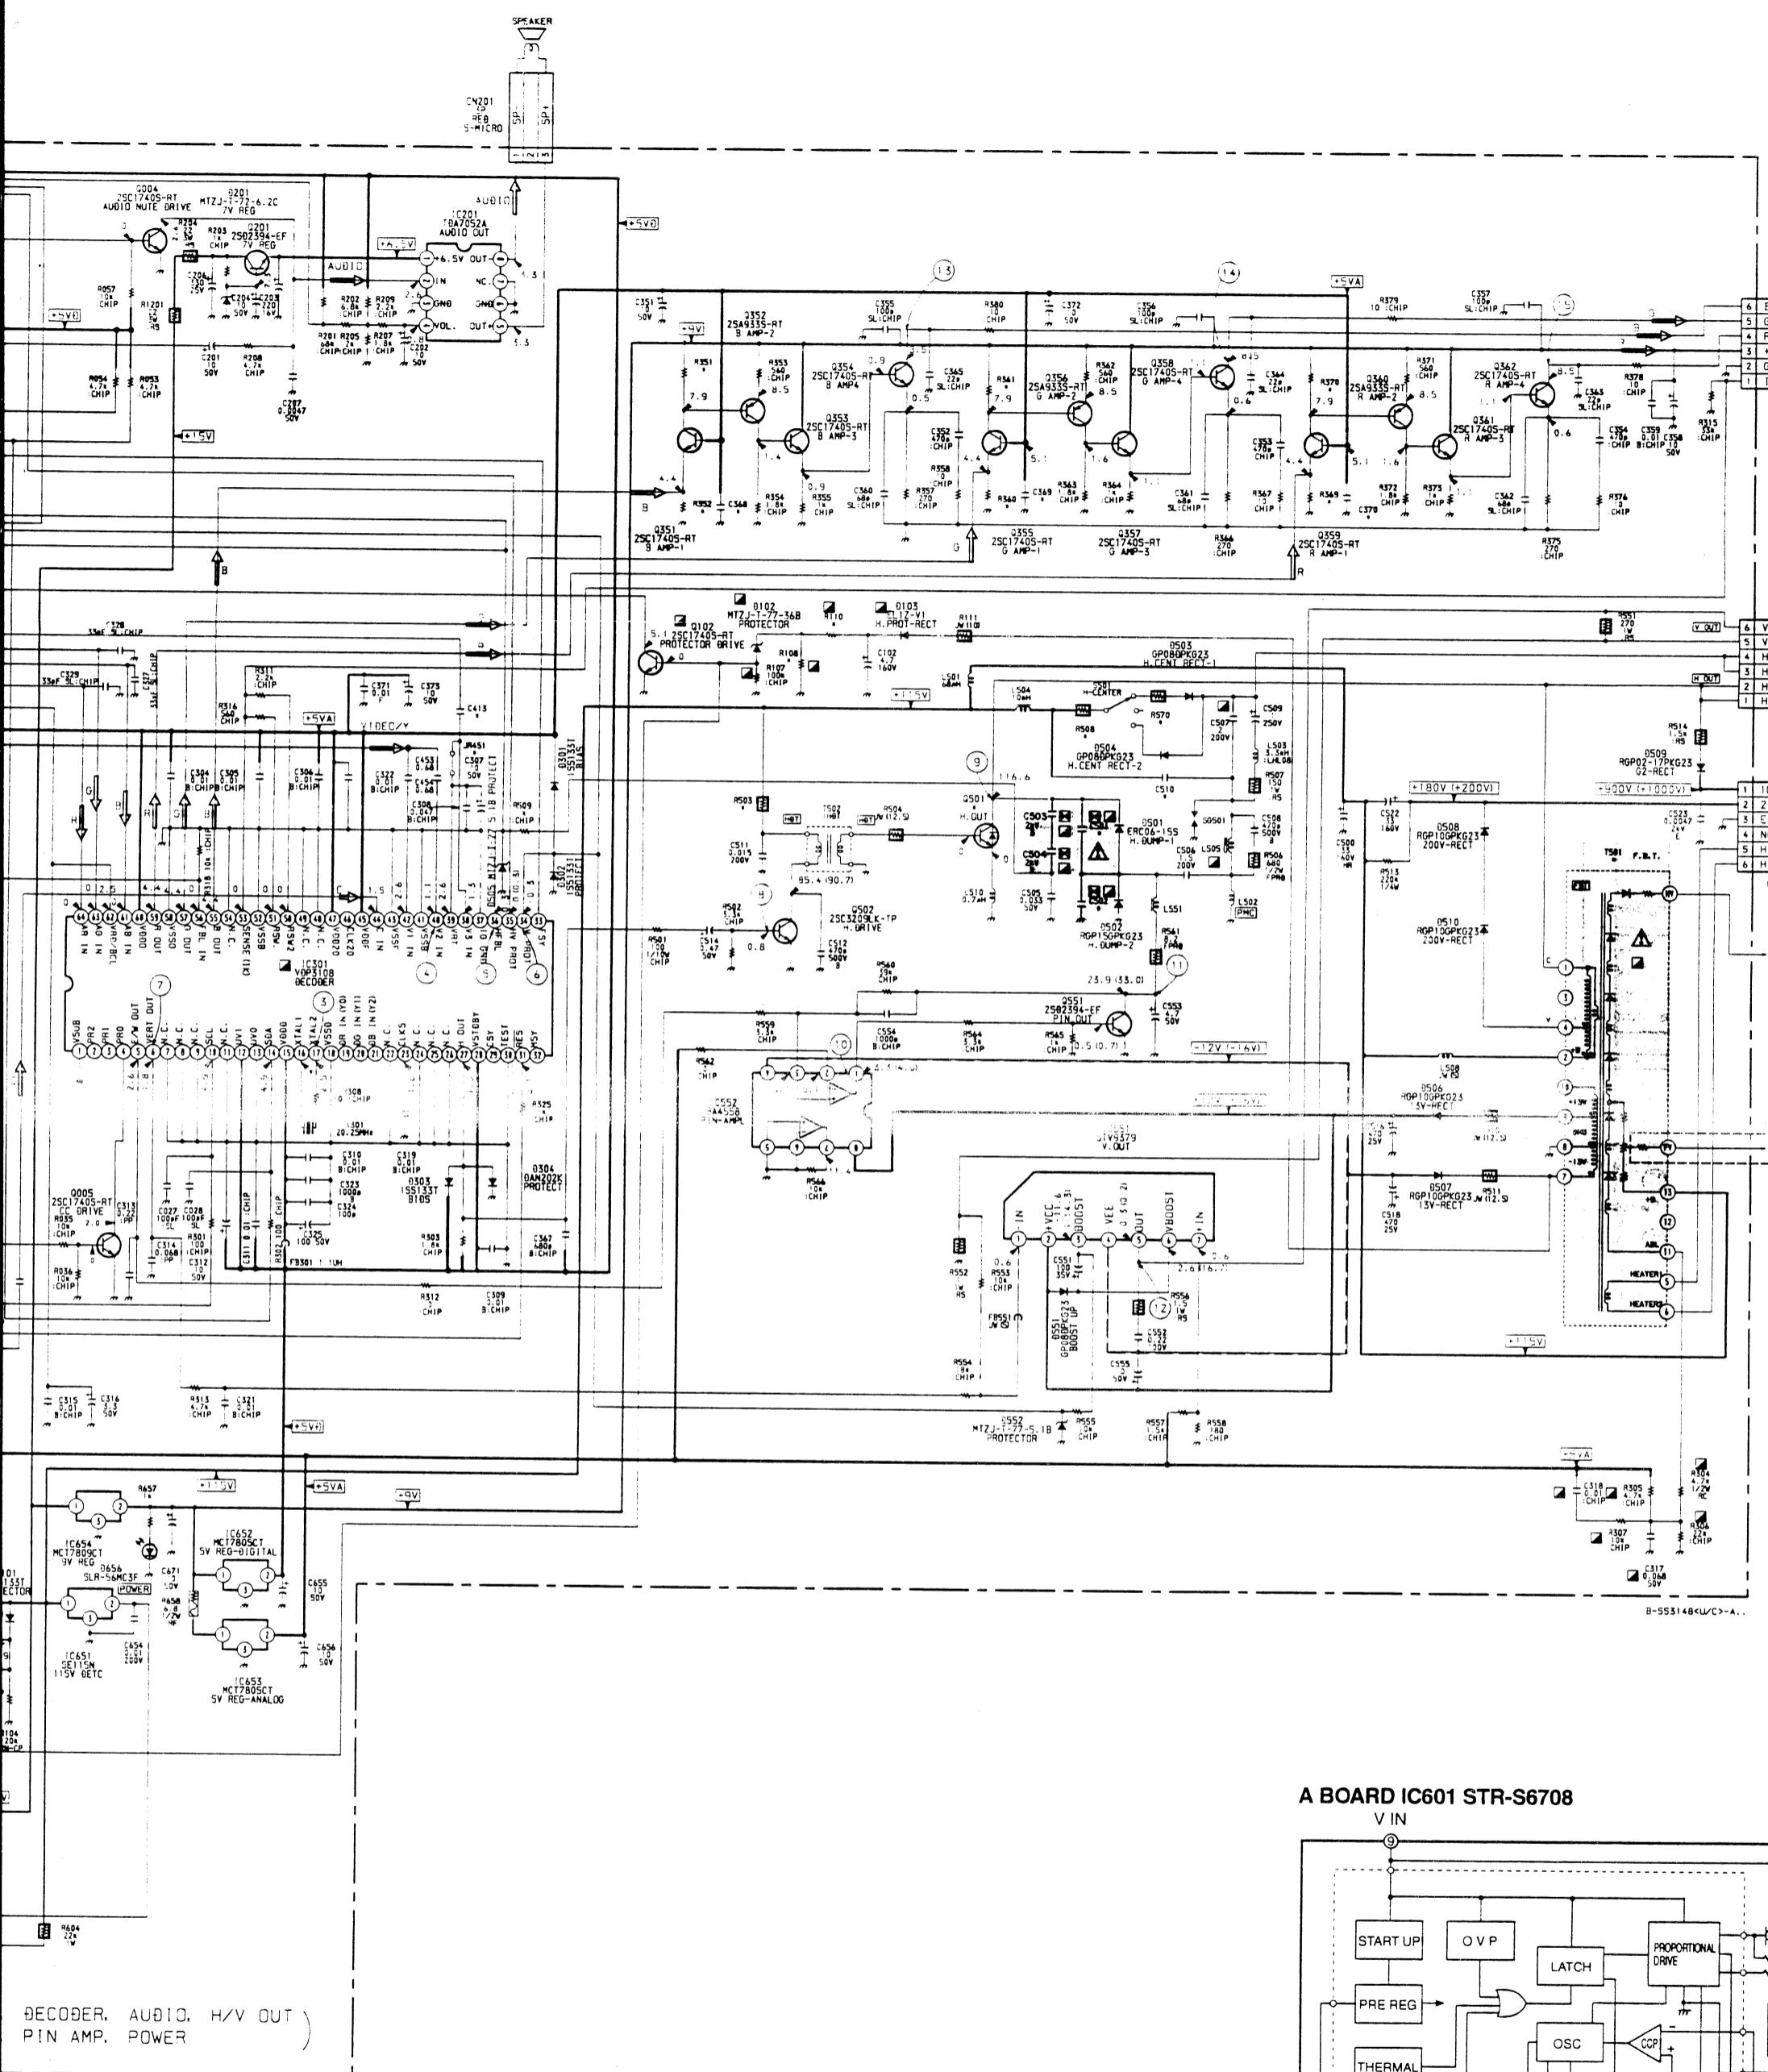

A BOARD IC601 STR-S6708
V IN

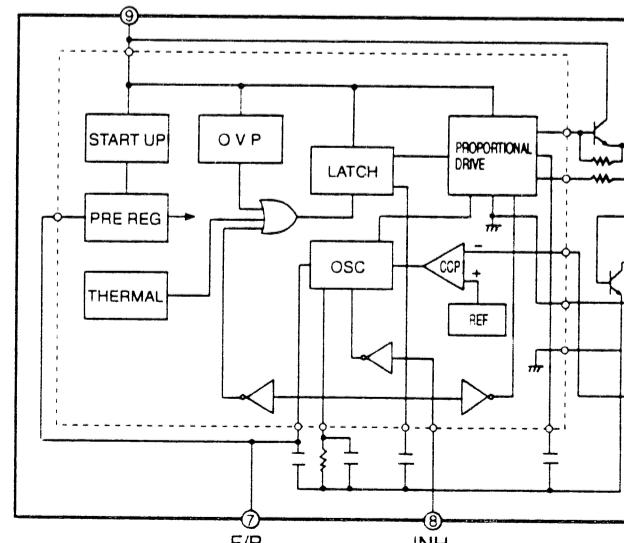

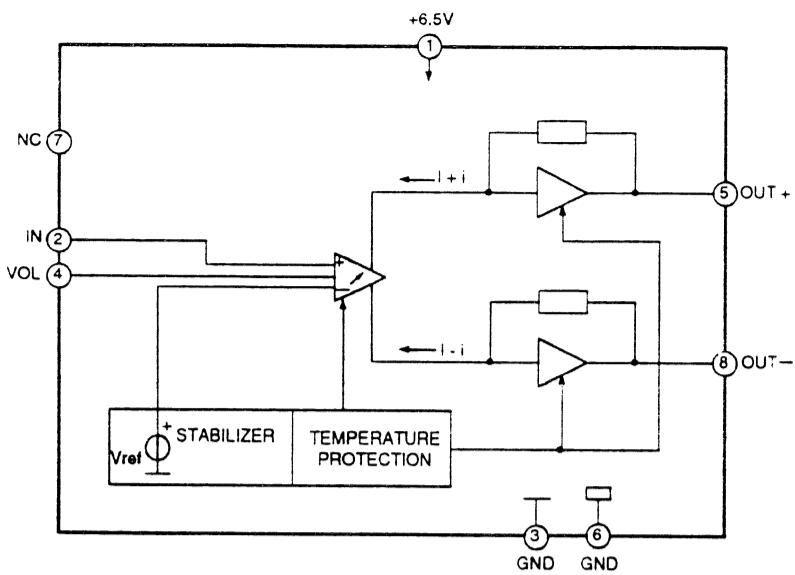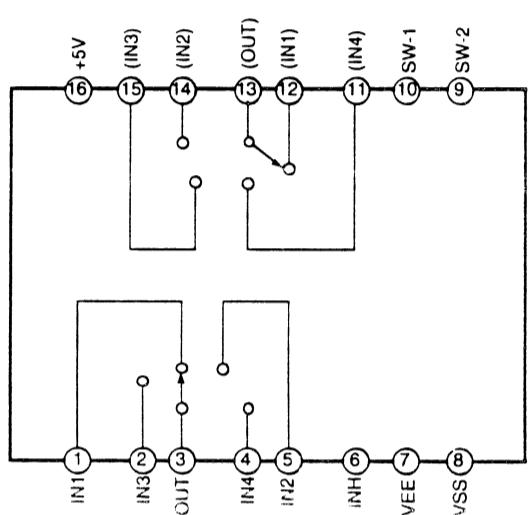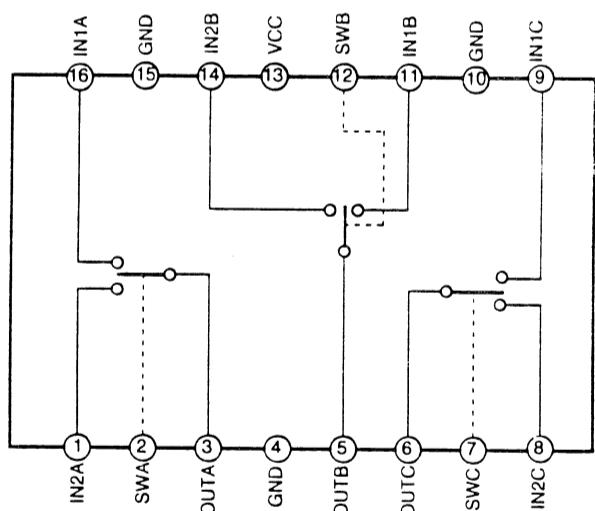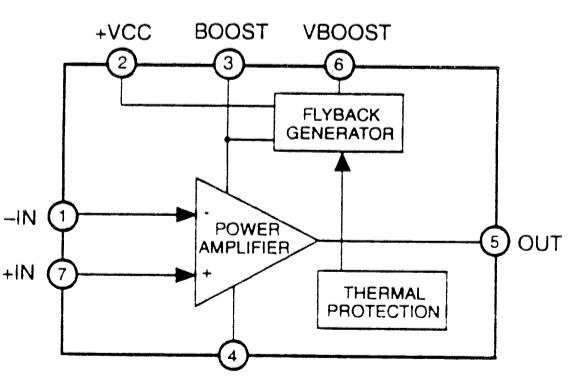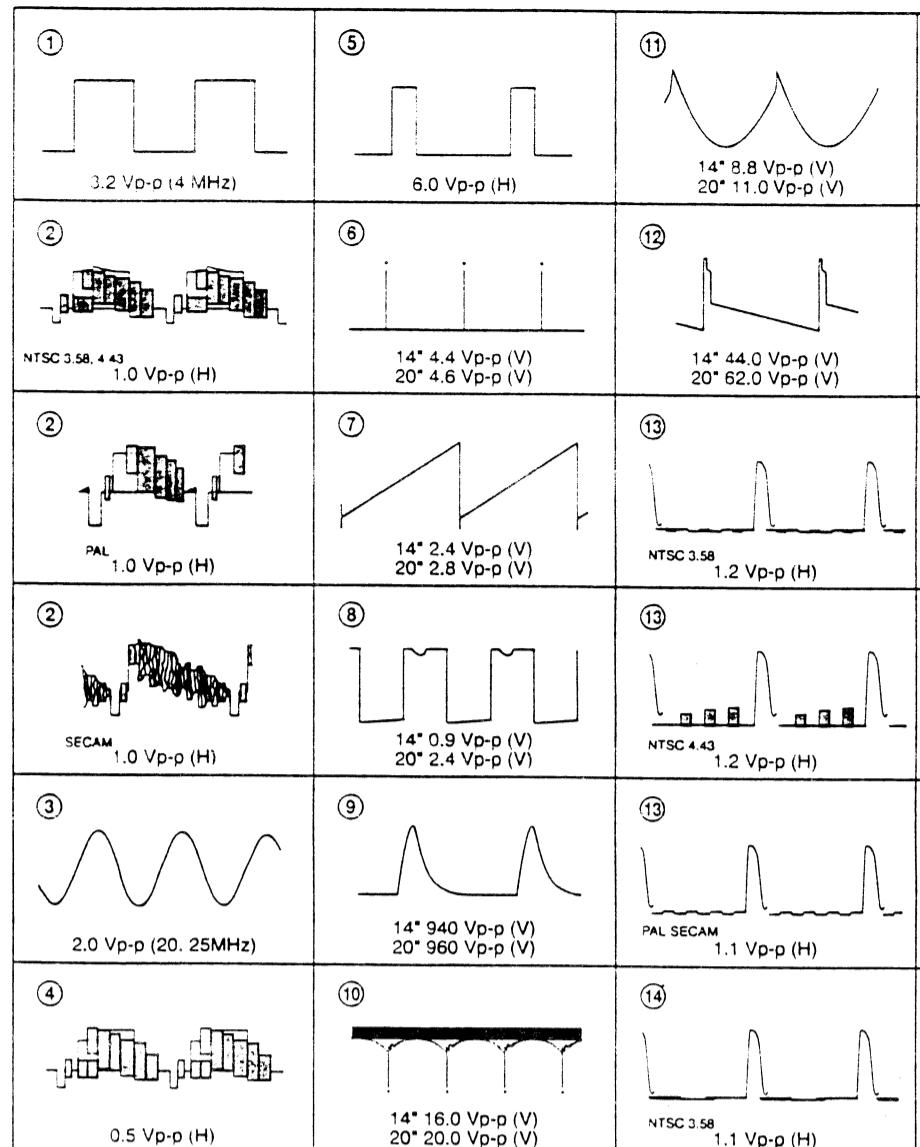A BOARD IC201 TDA7052A**A BOARD IC401 MC14052BCP****A BOARD IC402 BA7602****A BOARD IC551 STV9739****A BOARD WAVEFORMS****A BOARD *MARK**

Model	PVM- 14N1A, 14N1E, 14N1U	PVM- 14N2A, 14N2E, 14N2U	SSM- 14N1E, 14N1U	PVM- 20N1A, 20N1E, 20N1U	PVM- 20N2A, 20N2E, 20N2U
Ref. NO.					
C006	-	0.001	-	-	0.001
C368	0.0022	0.0022	0.0022	470P	470P
C369	0.0022	0.0022	0.0022	470P	470P
C370	0.0022	0.0022	0.0022	470P	470P
C402	10/50V	10/50V	-	10/50V	10/50V
C407	10/50V	10/50V	-	10/50V	10/50V
C409	10/50V	10/50V	-	10/50V	10/50V
C410	0.01	0.01	-	0.01	0.01
C411	0.01	0.01	-	0.01	0.01
C412	10/50V	10/50V	-	10/50V	10/50V
C413	-	0.68	-	-	0.68
C414	-	150P	-	-	150P
C501	■ /2kV	■ /2kV	■ /2kV	■ /2kV	■ /2kV
C502	■ /630V	■ /630V	■ /630V	■ /400V	■ /400V
C510	-	0.1/200V	-	-	0.1/200V
CN402	7P	7P	-	7P	7P
IC401	MC14052BCP	MC14052BCP	-	MC14052BCP	MC14052BCP
IC402	BA7602	BA7602	-	BA7602	BA7602
JR451	0	-	0	0	-
JW401	-	-	JW(5)	-	-
JW403	-	-	JW(10)	-	-
JW404	-	-	JW(5)	-	-
Q501	2SD1877S	2SD1877S	2SD1877S	2SD1878	2SD1878
R101	1.5 3W	1.5 3W	1.5 3W	1.2 3W	1.2 3W
R108	22k 0.5%	22k 0.5%	22k 0.5%	20k 0.5%	20k 0.5%
R110	56k 0.5%	56k 0.5%	56k 0.5%	68k 0.5%	68k 0.5%
R351	470	470	470	680	680
R352	5.6k	5.6k	5.6k	-	-
R360	5.6k	5.6k	5.6k	-	-
R361	470	470	470	680	680
R369	5.6k	5.6k	5.6k	-	-
R370	470	470	470	680	680
R401	-	470	-	-	470
R503	4.7k 2W	4.7k 2W	4.7k 2W	3.3k 2W	3.3k 2W
R508	27 1W	27 1W	27 1W	22 2W	22 2W
R570	18 1W	18 1W	18 1W	27 1W	27 1W
S006	-	RGB	-	-	RGB SW
T501	NX-2610/U2A	NX-2610/U2A	NX-2610/U2A	NX-2611/U2A	NX-2611/U2A



Schematic diagrams

← A board


Schema

CA

A BOARD WAVEFORMS

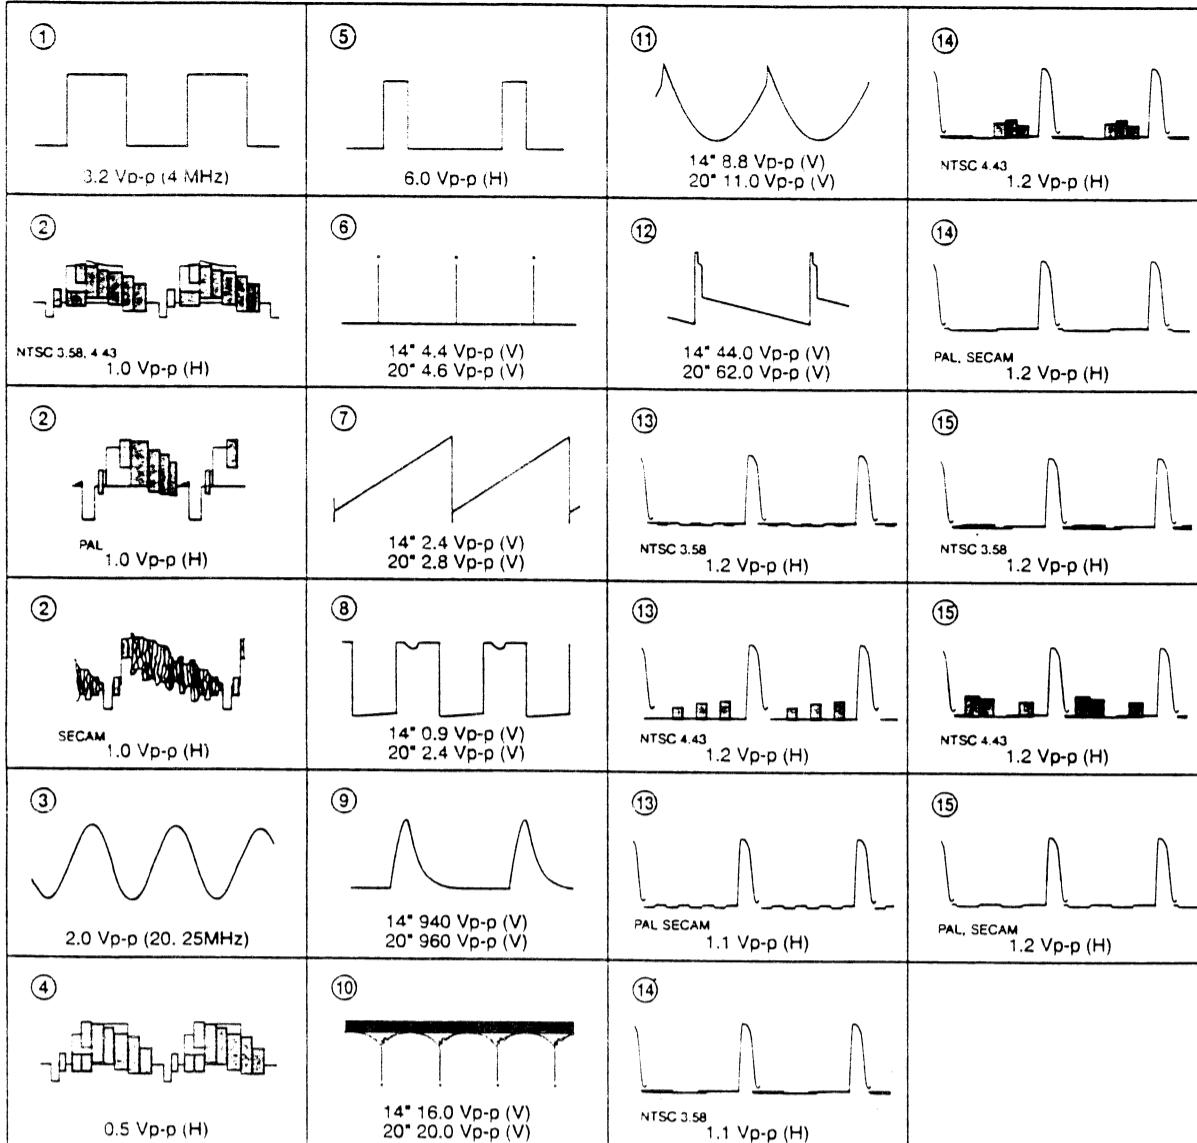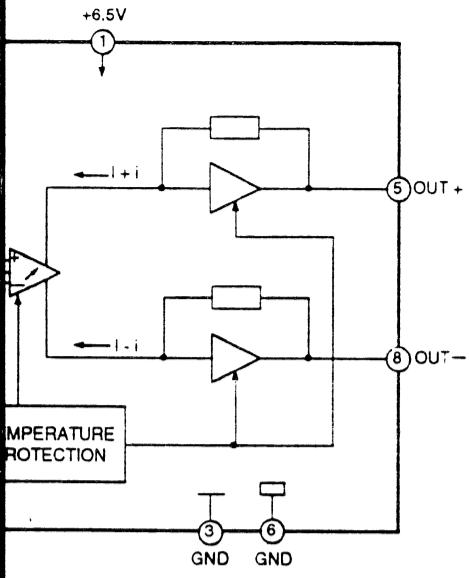

052BCP

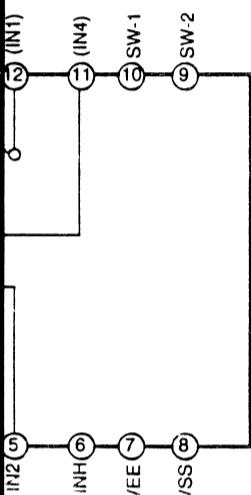

A BOARD *MARK

Ref. NO.	PVM- 14N1A, 14N1E, 14N1U	PVM- 14N2A, 14N2E, 14N2U	SSM- 14N1E, 14N1U	PVM- 20N1A, 20N1E, 20N1U	PVM- 20N2A, 20N2E, 20N2U	SSM- 20N1E, 20N1U
C006		0.001			0.001	
C368	0.0022	0.0022	0.0022	470P	470P	470P
C369	0.0022	0.0022	0.0022	470P	470P	470P
C370	0.0022	0.0022	0.0022	470P	470P	470P
C402	10/50V	10/50V	-	10/50V	10/50V	-
C407	10/50V	10/50V	-	10/50V	10/50V	-
C409	10/50V	10/50V	-	10/50V	10/50V	-
C410	0.01	0.01	-	0.01	0.01	-
C411	0.01	0.01	-	0.01	0.01	-
C412	10/50V	10/50V	-	10/50V	10/50V	-
C413	-	0.68	-	-	0.68	-
C414	-	150P	-	-	150P	-
C501	/2kV	/2kV	/2kV	/2kV	/2kV	/2kV
C502	/630V	/630V	/630V	/400V	/400V	/400V
C510	-	0.1/200V	-	-	0.1/200V	-
CN402	7P	7P	-	7P	7P	-
IC401	MC14052BCP	MC14052BCP	-	MC14052BCP	MC14052BCP	-
IC402	BA7602	BA7602	-	BA7602	BA7602	-
JR451	0	-	0	0	-	0
JW401	-	-	JW(5)	-	-	JW(5)
JW403	-	-	JW(10)	-	-	JW(10)
JW404	-	-	JW(5)	-	-	JW(5)
Q501	2SD1877S	2SD1877S	2SD1877S	2SD1878	2SD1878	2SD1878
R101	1.5 3W	1.5 3W	1.5 3W	1.2 3W	1.2 3W	1.2 3W
R108	22k 0.5%	22k 0.5%	22k 0.5%	20k 0.5%	20k 0.5%	20k 0.5%
R110	56k 0.5%	56k 0.5%	56k 0.5%	68k 0.5%	68k 0.5%	68k 0.5%
R351	470	470	470	680	680	680
R352	5.6k	5.6k	5.6k	-	-	-
R360	5.6k	5.6k	5.6k	-	-	-
R361	470	470	470	680	680	680
R369	5.6k	5.6k	5.6k	-	-	-
R370	470	470	470	680	680	680
R401	-	470	-	-	470	-
R503	4.7k 2W	4.7k 2W	4.7k 2W	3.3k 2W	3.3k 2W	3.3k 2W
R508	27 1W	27 1W	27 1W	22 2W	22 2W	22 2W
R570	18 1W	18 1W	18 1W	27 1W	27 1W	27 1W
S006	-	RGB	-	-	RGB SW	-
T501	NX-2610//U2A	NX-2610//U2A	NX-2610//U2A	NX-2611//U2A	NX-2611//U2A	NX-2611//U2A

Schematic diagrams


← A board

Schematic diagrams

Q CA CB S board →

Serial No. 6000222 and Higher (PVM-14N1A)	Serial No. 6000092 and Higher (PVM-20N1A)
Serial No. 6003700 and Higher (PVM-14N1E)	Serial No. 6000924 and Higher (PVM-20N1E)
Serial No. 6000001 and Higher (PVM-14N1MDE)	Serial No. 6001488 and Higher (PVM-20N1U)
Serial No. 6003584 and Higher (PVM-14N1U)	Serial No. 6000049 and Higher (PVM-20N2A)
Serial No. 6000097 and Higher (PVM-14N2A)	Serial No. 6000799 and Higher (PVM-20N2E)
Serial No. 6002486 and Higher (PVM-14N2E)	Serial No. 6000848 and Higher (PVM-20N2U)
Serial No. 6002320 and Higher (PVM-14N2U)	Serial No. 6001086 and Higher (SSM-20N1E)
Serial No. 6002356 and Higher (SSM-14N1E)	Serial No. 6000968 and Higher (SSM-20N1U)
Serial No. 6002572 and Higher (SSM-14N1U)	


A BOARD WAVEFORMS

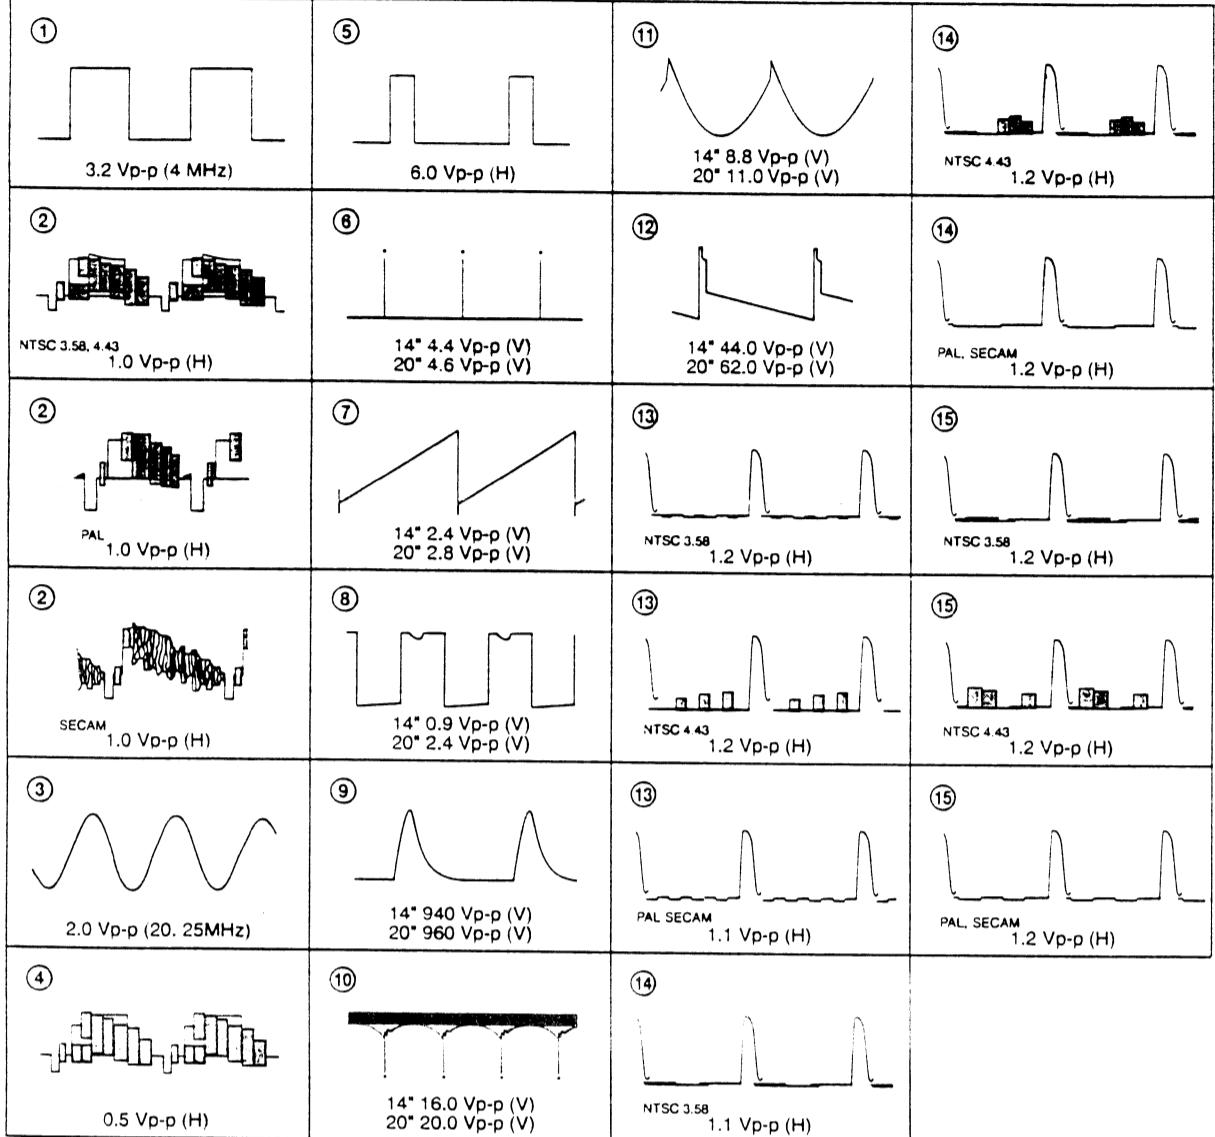


A BOARD *MARK


Model Ref. NO.	PVM- 14N1A, 14N1E, 14N1MDE 14N1U	PVM- 14N2A, 14N2E, 14N2U	SSM- 14N1E, 14N1U	PVM- 20N1A, 20N1E, 20N1U	PVM- 20N2A, 20N2E, 20N2U	SSM- 20N1E, 20N1U
C006	-	0.001	-	-	0.001	-
C368	0.0022	0.0022	0.0022	470P	470P	470P
C369	0.0022	0.0022	0.0022	470P	470P	470P
C370	0.0022	0.0022	0.0022	470P	470P	470P
C402	10/50V	10/50V	-	10/50V	10/50V	-
C407	10/50V	10/50V	-	10/50V	10/50V	-
C409	10/50V	10/50V	-	10/50V	10/50V	-
C410	0.01	0.01	-	0.01	0.01	-
C411	0.01	0.01	-	0.01	0.01	-
C412	10/50V	10/50V	-	10/50V	10/50V	-
C413	-	0.68	-	-	0.68	-
C414	-	150P	-	-	150P	-
C501	☒ /2kV	☒ /2kV	☒ /2kV	☒ /2kV	☒ /2kV	☒ /2kV
C502	☒ /630V	☒ /630V	☒ /630V	☒ /400V	☒ /400V	☒ /400V
C510	-	0.1/200V	-	-	0.1/200V	-
CN402	7P	7P	-	7P	7P	-
IC401	MC14052BCP	MC14052BCP	-	MC14052BCP	MC14052BCP	-
IC402	BA7602	BA7602	-	BA7602	BA7602	-
JR451	0	-	0	0	-	0
JW401	-	-	JW(5)	-	-	JW(5)
JW403	-	-	JW(10)	-	-	JW(10)
JW404	-	-	JW(5)	-	-	JW(5)
Q501	2SD1877S	2SD1877S	2SD1877S	2SD1878	2SD1878	2SD1878
R101	1.5 3W	1.5 3W	1.5 3W	1.2 3W	1.2 3W	1.2 3W
R108	22k 0.5%	22k 0.5%	22k 0.5%	20k 0.5%	20k 0.5%	20k 0.5%
R110	56k 0.5%	56k 0.5%	56k 0.5%	68k 0.5%	68k 0.5%	68k 0.5%
R351	430 (gray CRT)	430 (gray CRT)	430 (gray CRT)	620 (gray CRT)	620 (gray CRT)	620 (gray CRT)
R351	510 (black CRT)	510 (black CRT)	510 (black CRT)	680 (black CRT)	680 (black CRT)	680 (black CRT)
R361	430 (gray CRT)	430 (gray CRT)	430 (gray CRT)	620 (gray CRT)	620 (gray CRT)	620 (gray CRT)
R361	510 (black CRT)	510 (black CRT)	510 (black CRT)	680 (black CRT)	680 (black CRT)	680 (black CRT)
R370	430 (gray CRT)	430 (gray CRT)	430 (gray CRT)	620 (gray CRT)	620 (gray CRT)	620 (gray CRT)
R370	510 (black CRT)	510 (black CRT)	510 (black CRT)	680 (black CRT)	680 (black CRT)	680 (black CRT)
R401	-	470	-	-	470	-
R503	4.7k 2W	4.7k 2W	4.7k 2W	3.3k 2W	3.3k 2W	3.3k 2W
R503	27 1W	27 1W	27 1W	18 1W	18 1W	18 1W
R570	18 1W	18 1W	18 1W	27 1W	27 1W	27 1W
S006	-	RGB SW	-	-	RGB SW	-
T50	NX-2610//U2A	NX-2610//U2A	NX-2610//U2A	NX-2611//U2A	NX-2611//U2A	NX-2611//U2A

- The constants of R351, R361, and R370 are changed when V901 is changed. Refer to SECTION 8. Electrical Parts List on page 71 for the list of serial numbers.

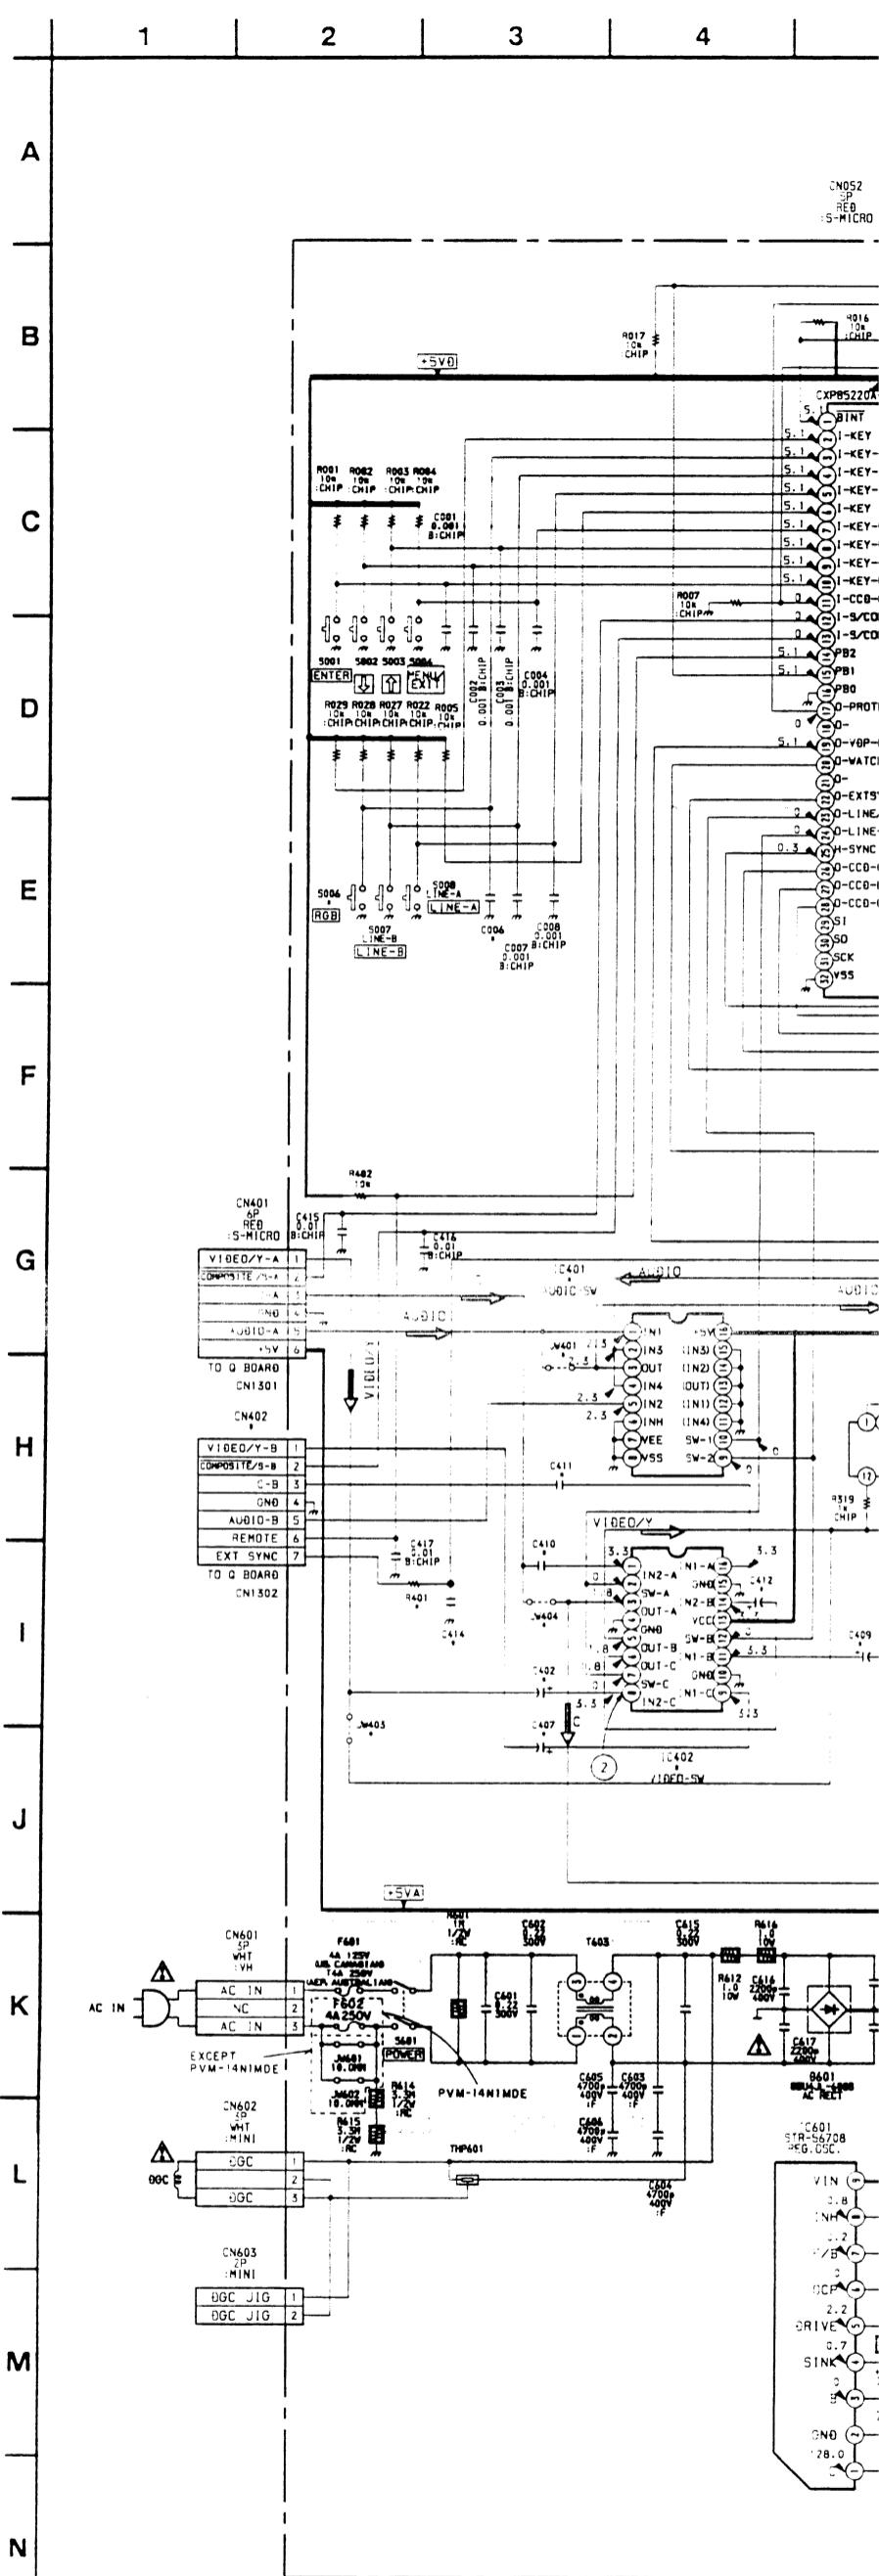


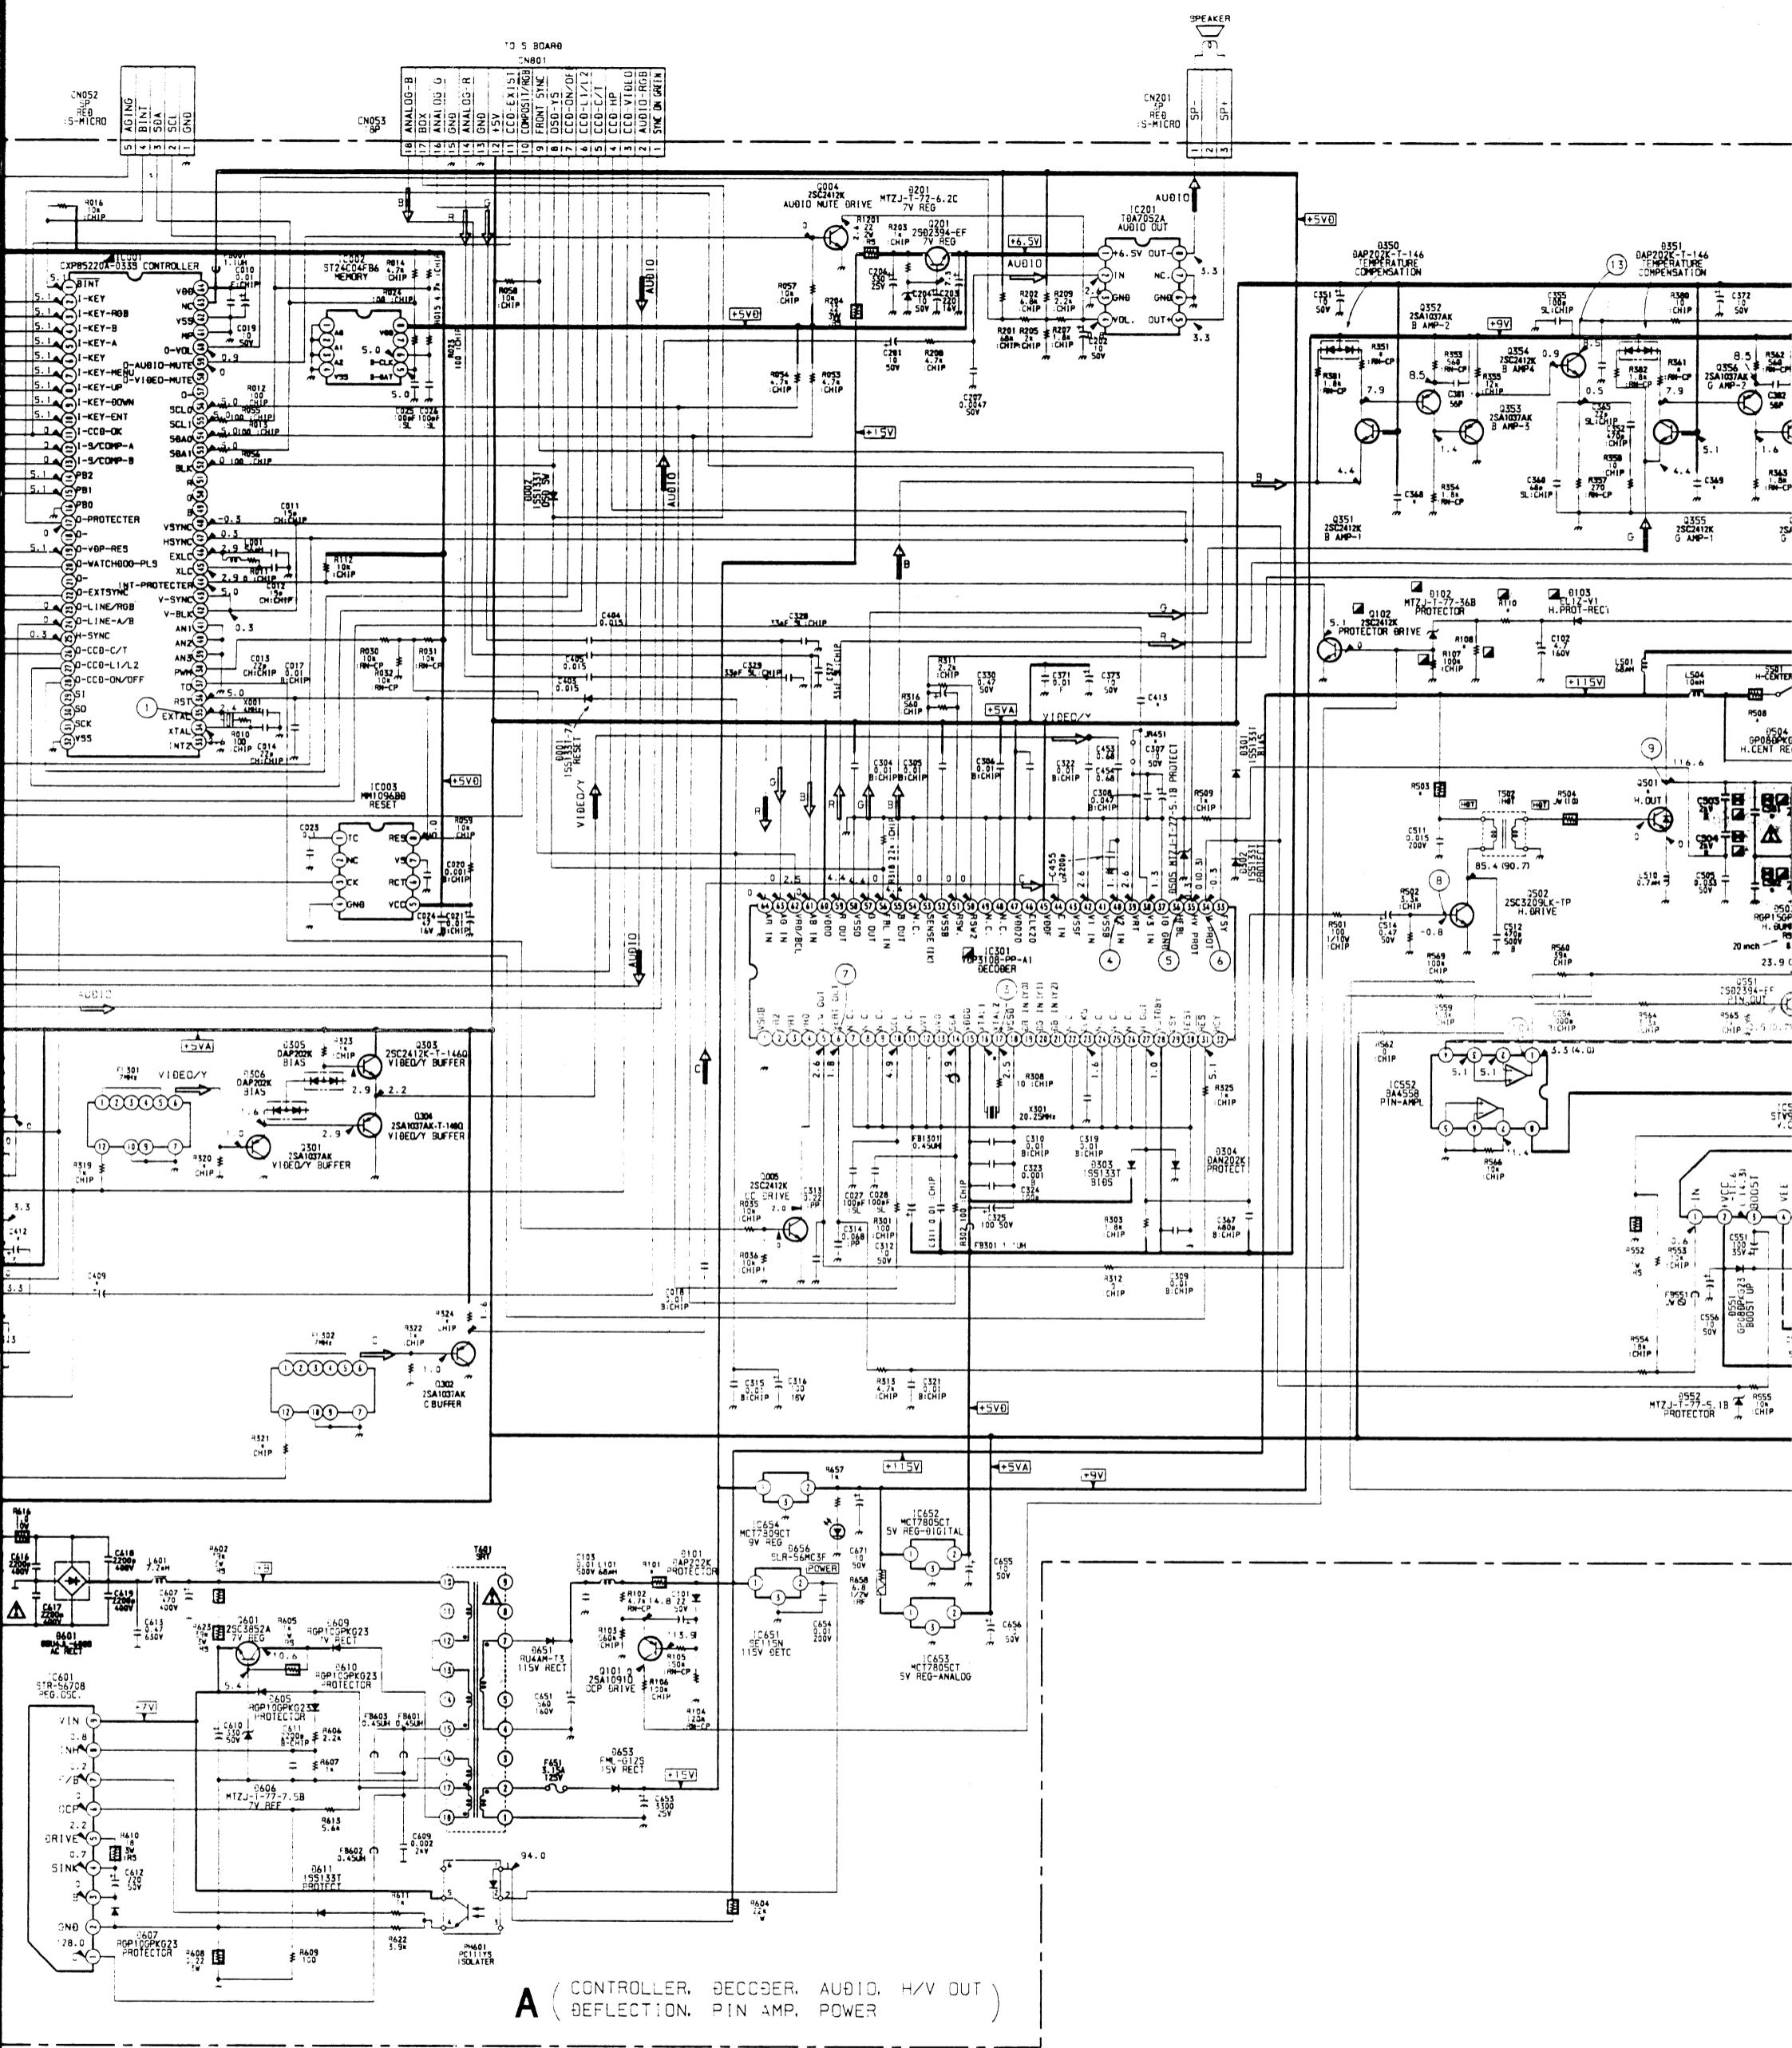


A BOARD IC201 TDA7052A

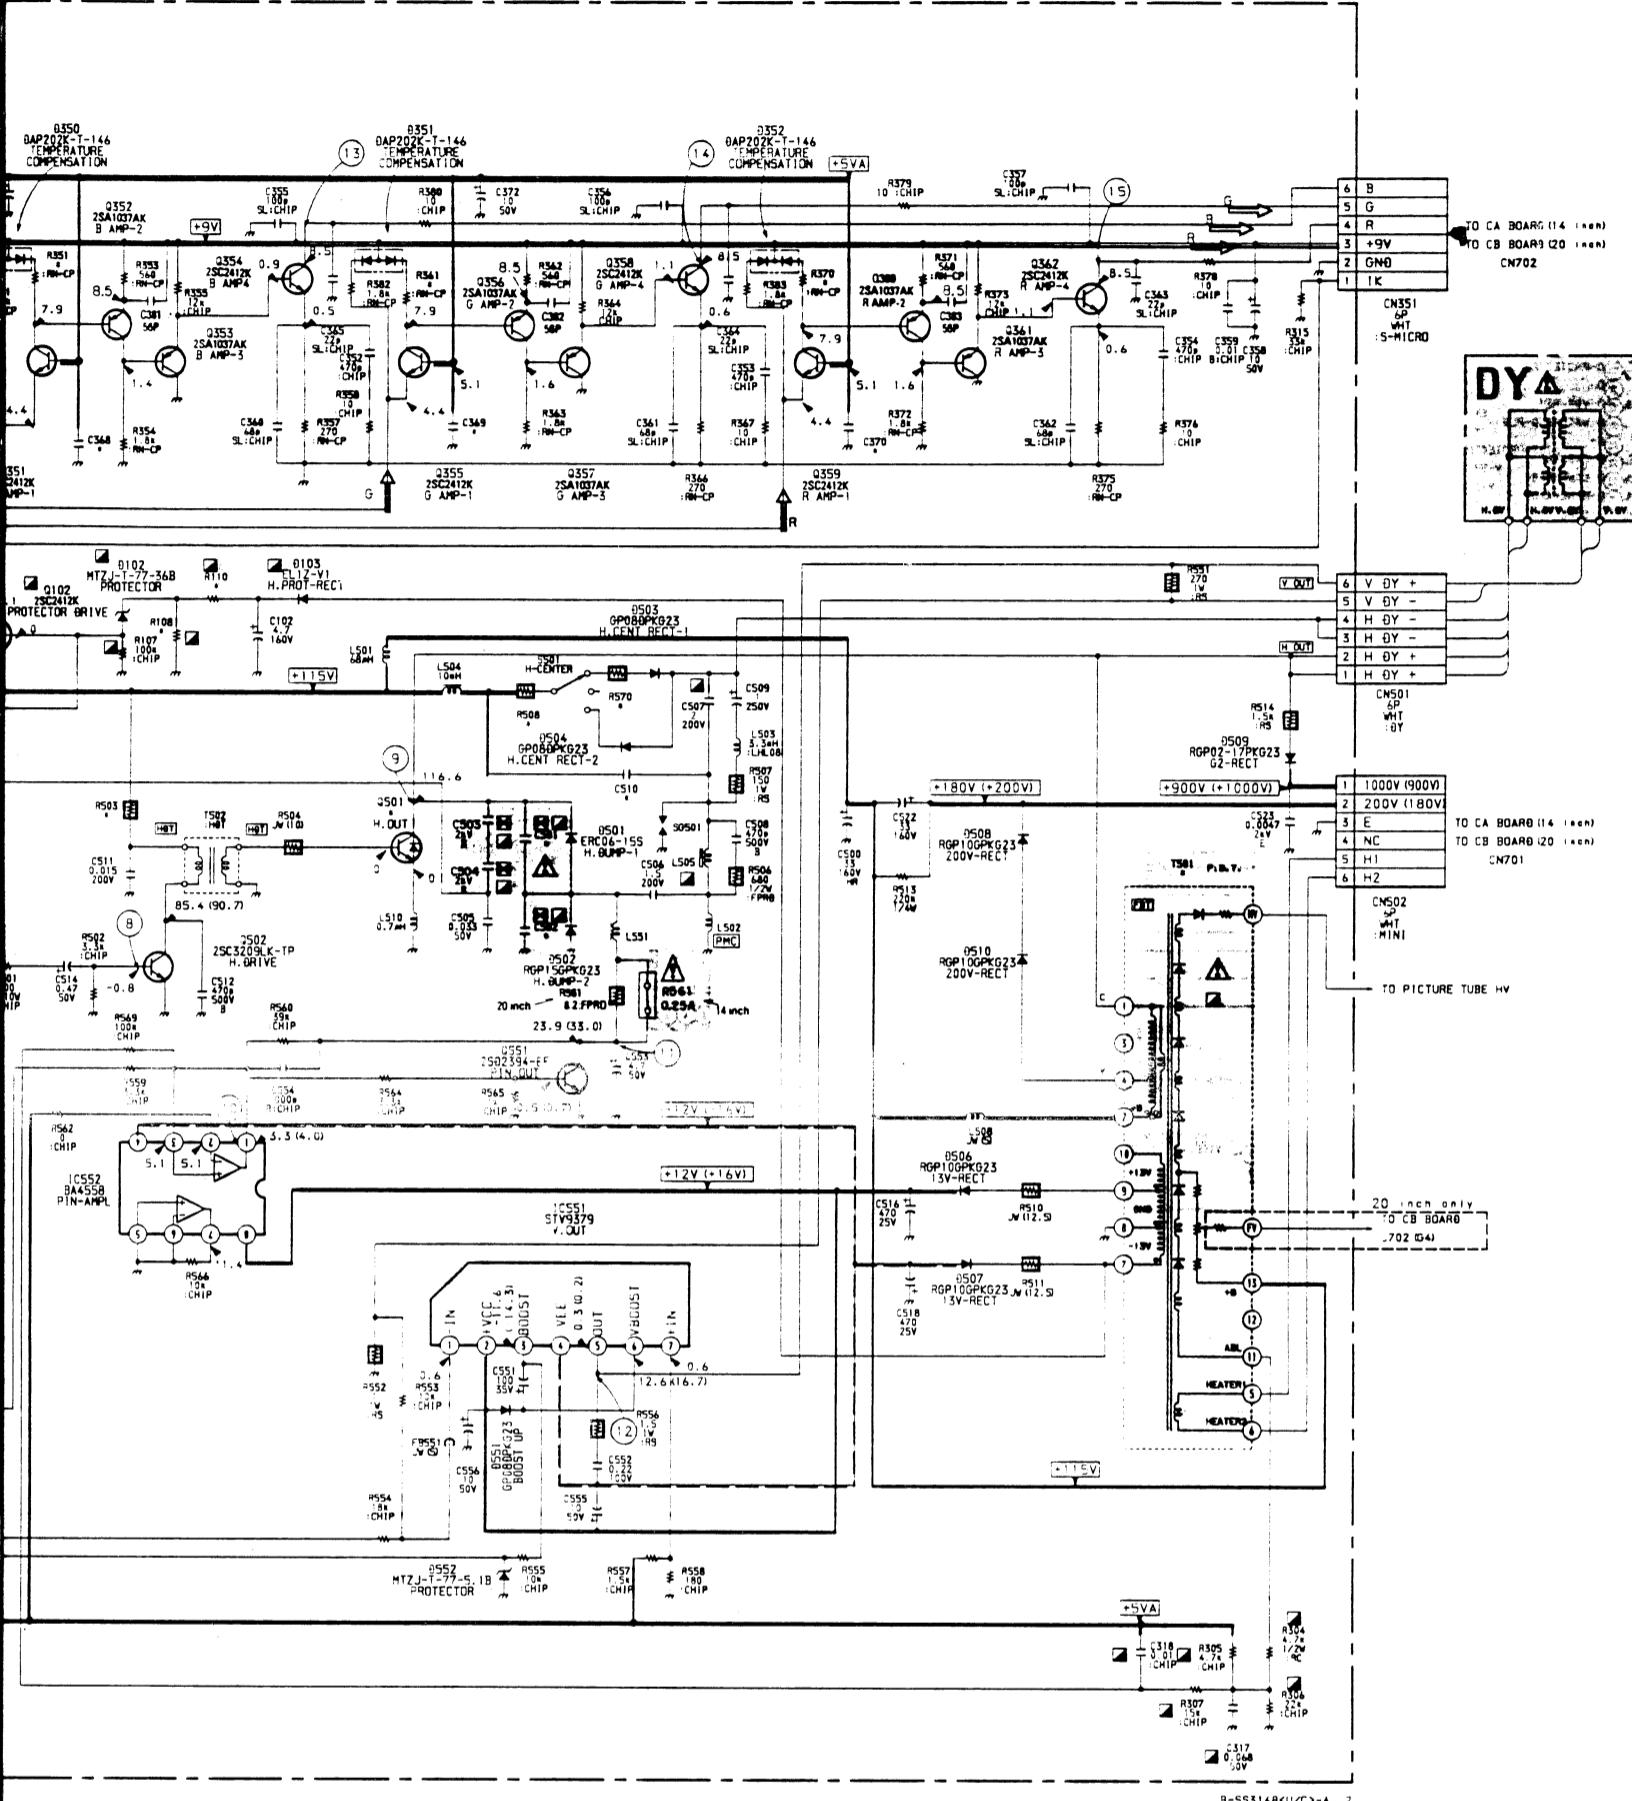


A BOARD IC401 MC14052BCP

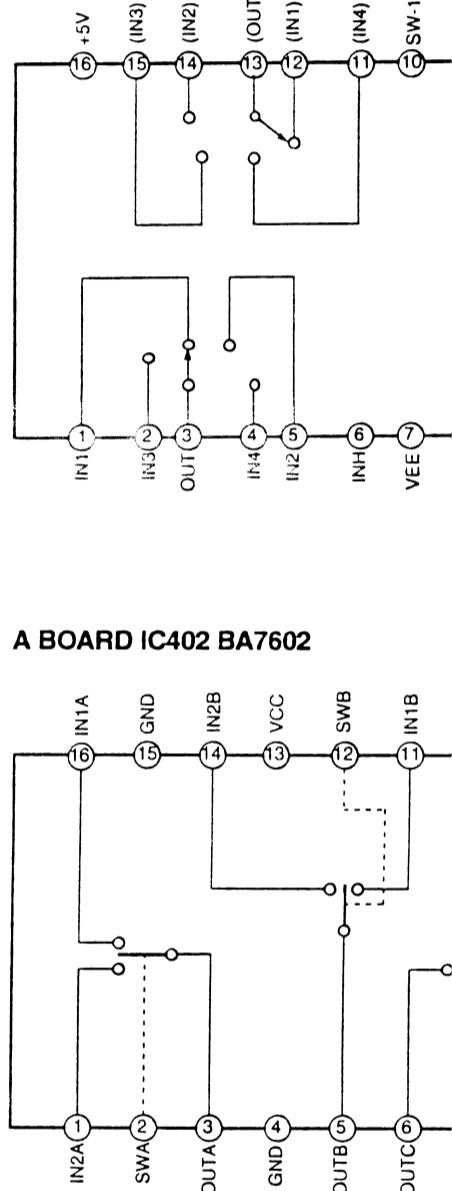


A BOARD IC402 BA7602

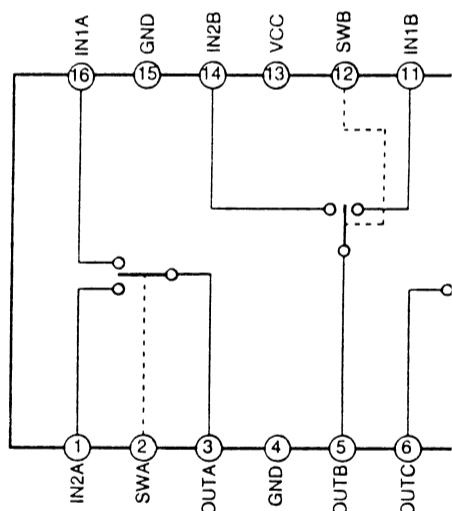


A BOARD IC601 STR-S6708

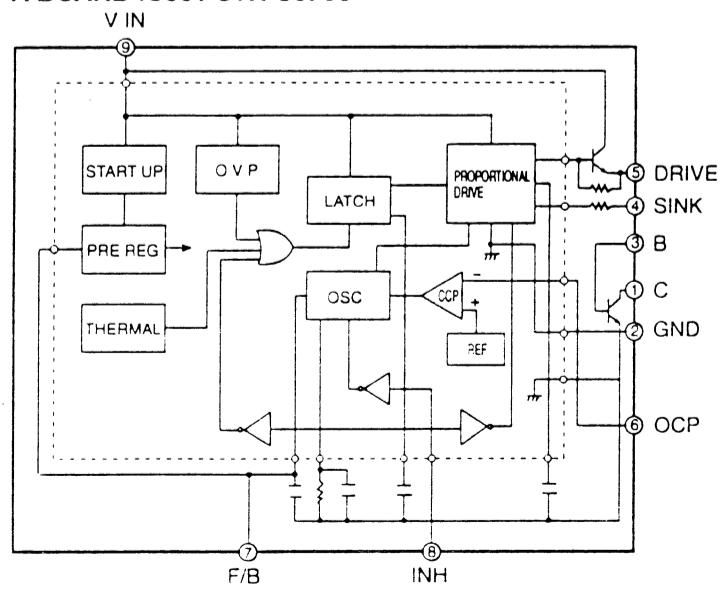


A BOARD IC551 STV9739

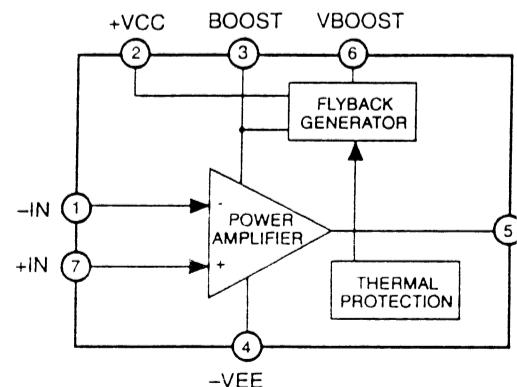


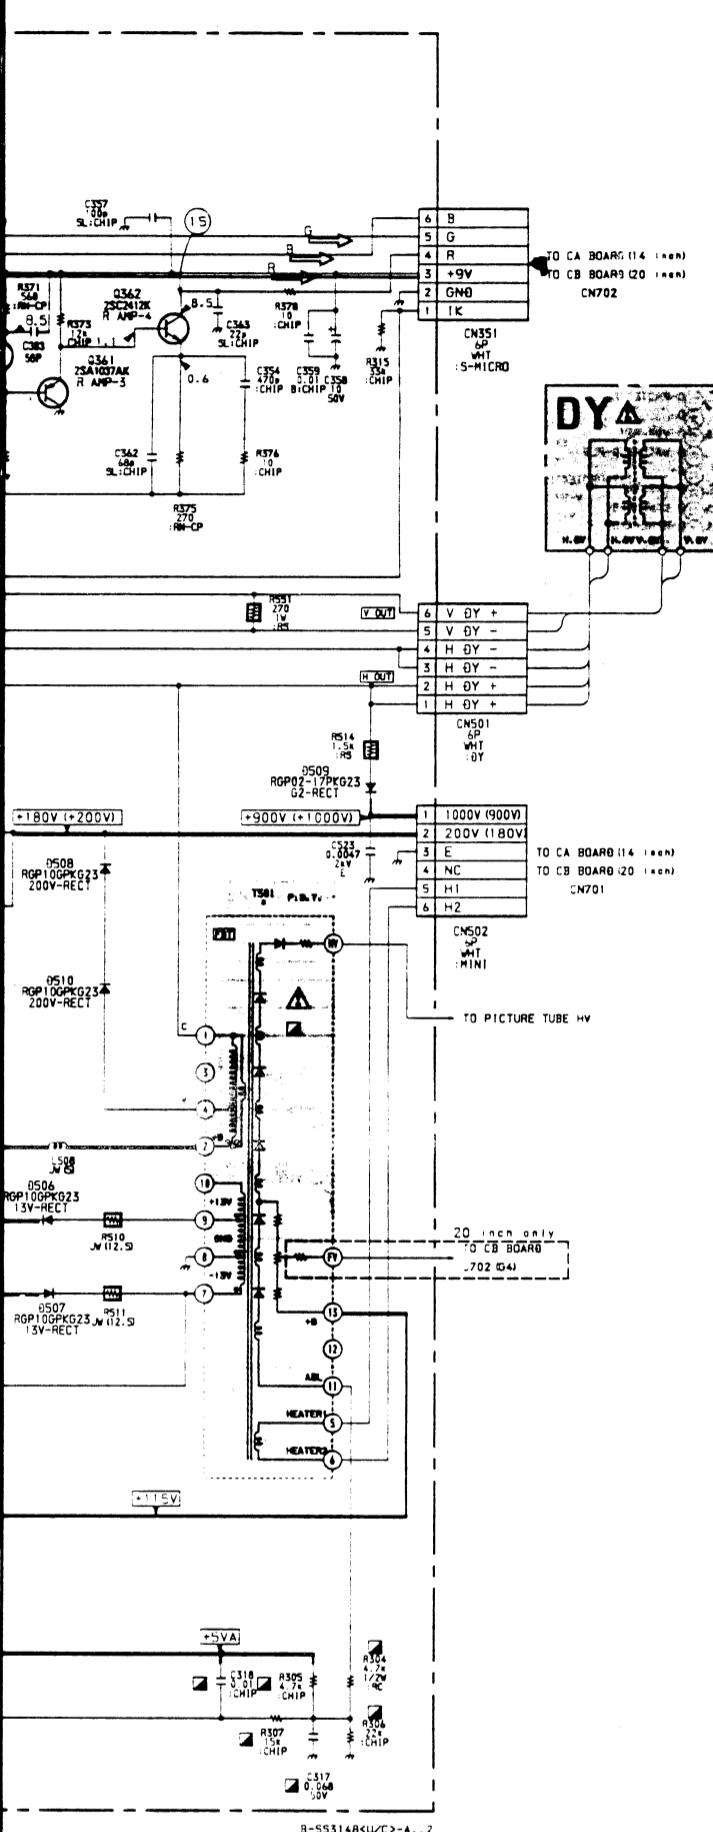


A BOARD IC201 TDA7052A

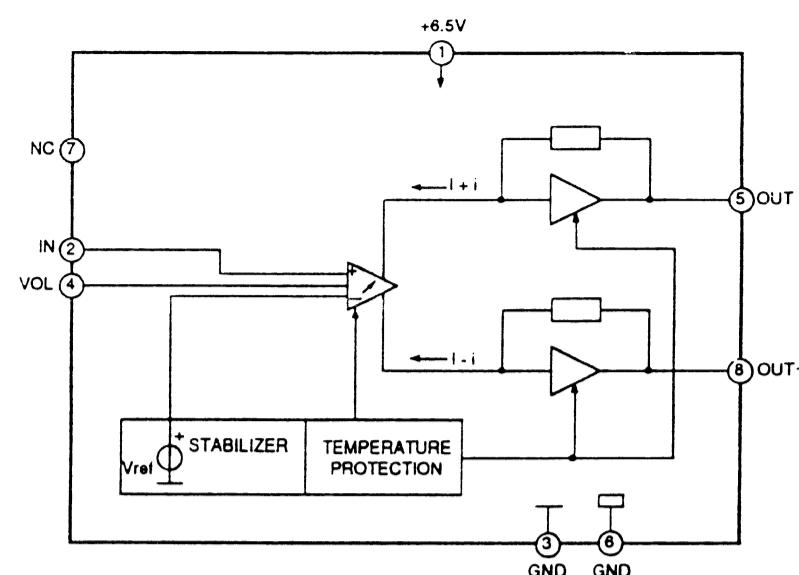


A BOARD IC401 MC14052BCP

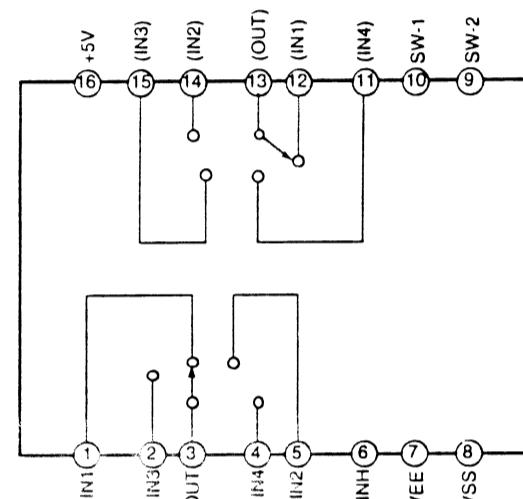


A BOARD IC402 BA7602

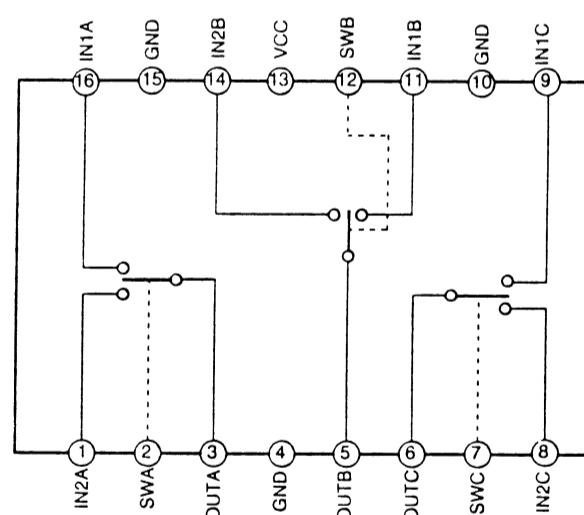

TR-S6708

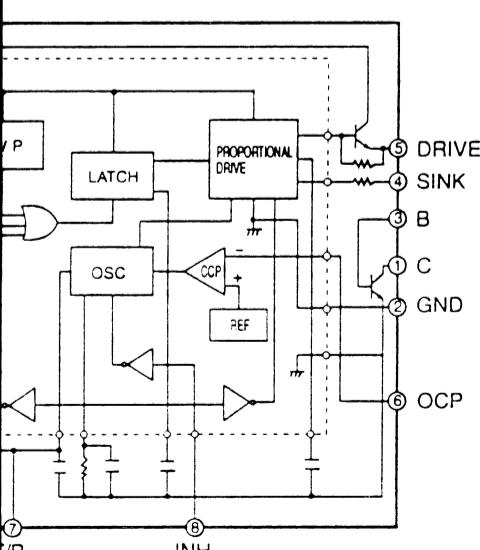

A BOARD IC551 STV9739

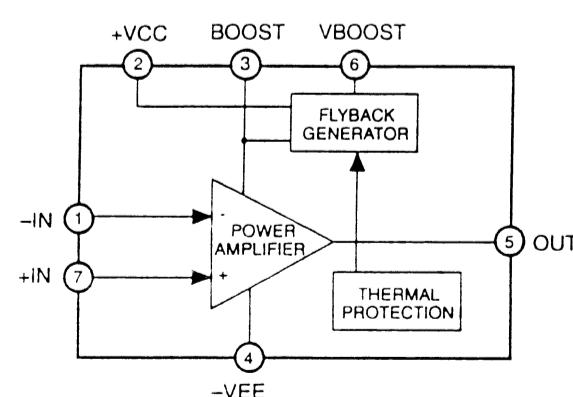


ACONTROLLER, DECODER, AUDIO, H/V OUT,
DEFLECTION, PIN AMP, POWER**- A BOARD -**

Serial No. 6000222 and Higher (PVM-14N1A)
 Serial No. 6003700 and Higher (PVM-14N1E)
 Serial No. 6000001 and Higher (PVM-14N1MDE)
 Serial No. 6003584 and Higher (PVM-14N1U)
 Serial No. 6000097 and Higher (PVM-14N2A)
 Serial No. 6002486 and Higher (PVM-14N2E)
 Serial No. 6002320 and Higher (PVM-14N2U)
 Serial No. 6002356 and Higher (SSM-14N1E)
 Serial No. 6002572 and Higher (SSM-14N1U)

Serial No. 6000092 and Higher (PVM-20N1A)
 Serial No. 6000924 and Higher (PVM-20N1E)
 Serial No. 6001488 and Higher (PVM-20N1U)
 Serial No. 6000049 and Higher (PVM-20N2A)
 Serial No. 6000799 and Higher (PVM-20N2E)
 Serial No. 600848 and Higher (PVM-20N2U)
 Serial No. 6001086 and Higher (SSM-20N1E)
 Serial No. 6000968 and Higher (SSM-20N1U)

NOTE:

The circuit indicated as left contains high voltage of over
 600 Vp-p. Care must be paid to prevent an electric shock in
 inspection or repairing.

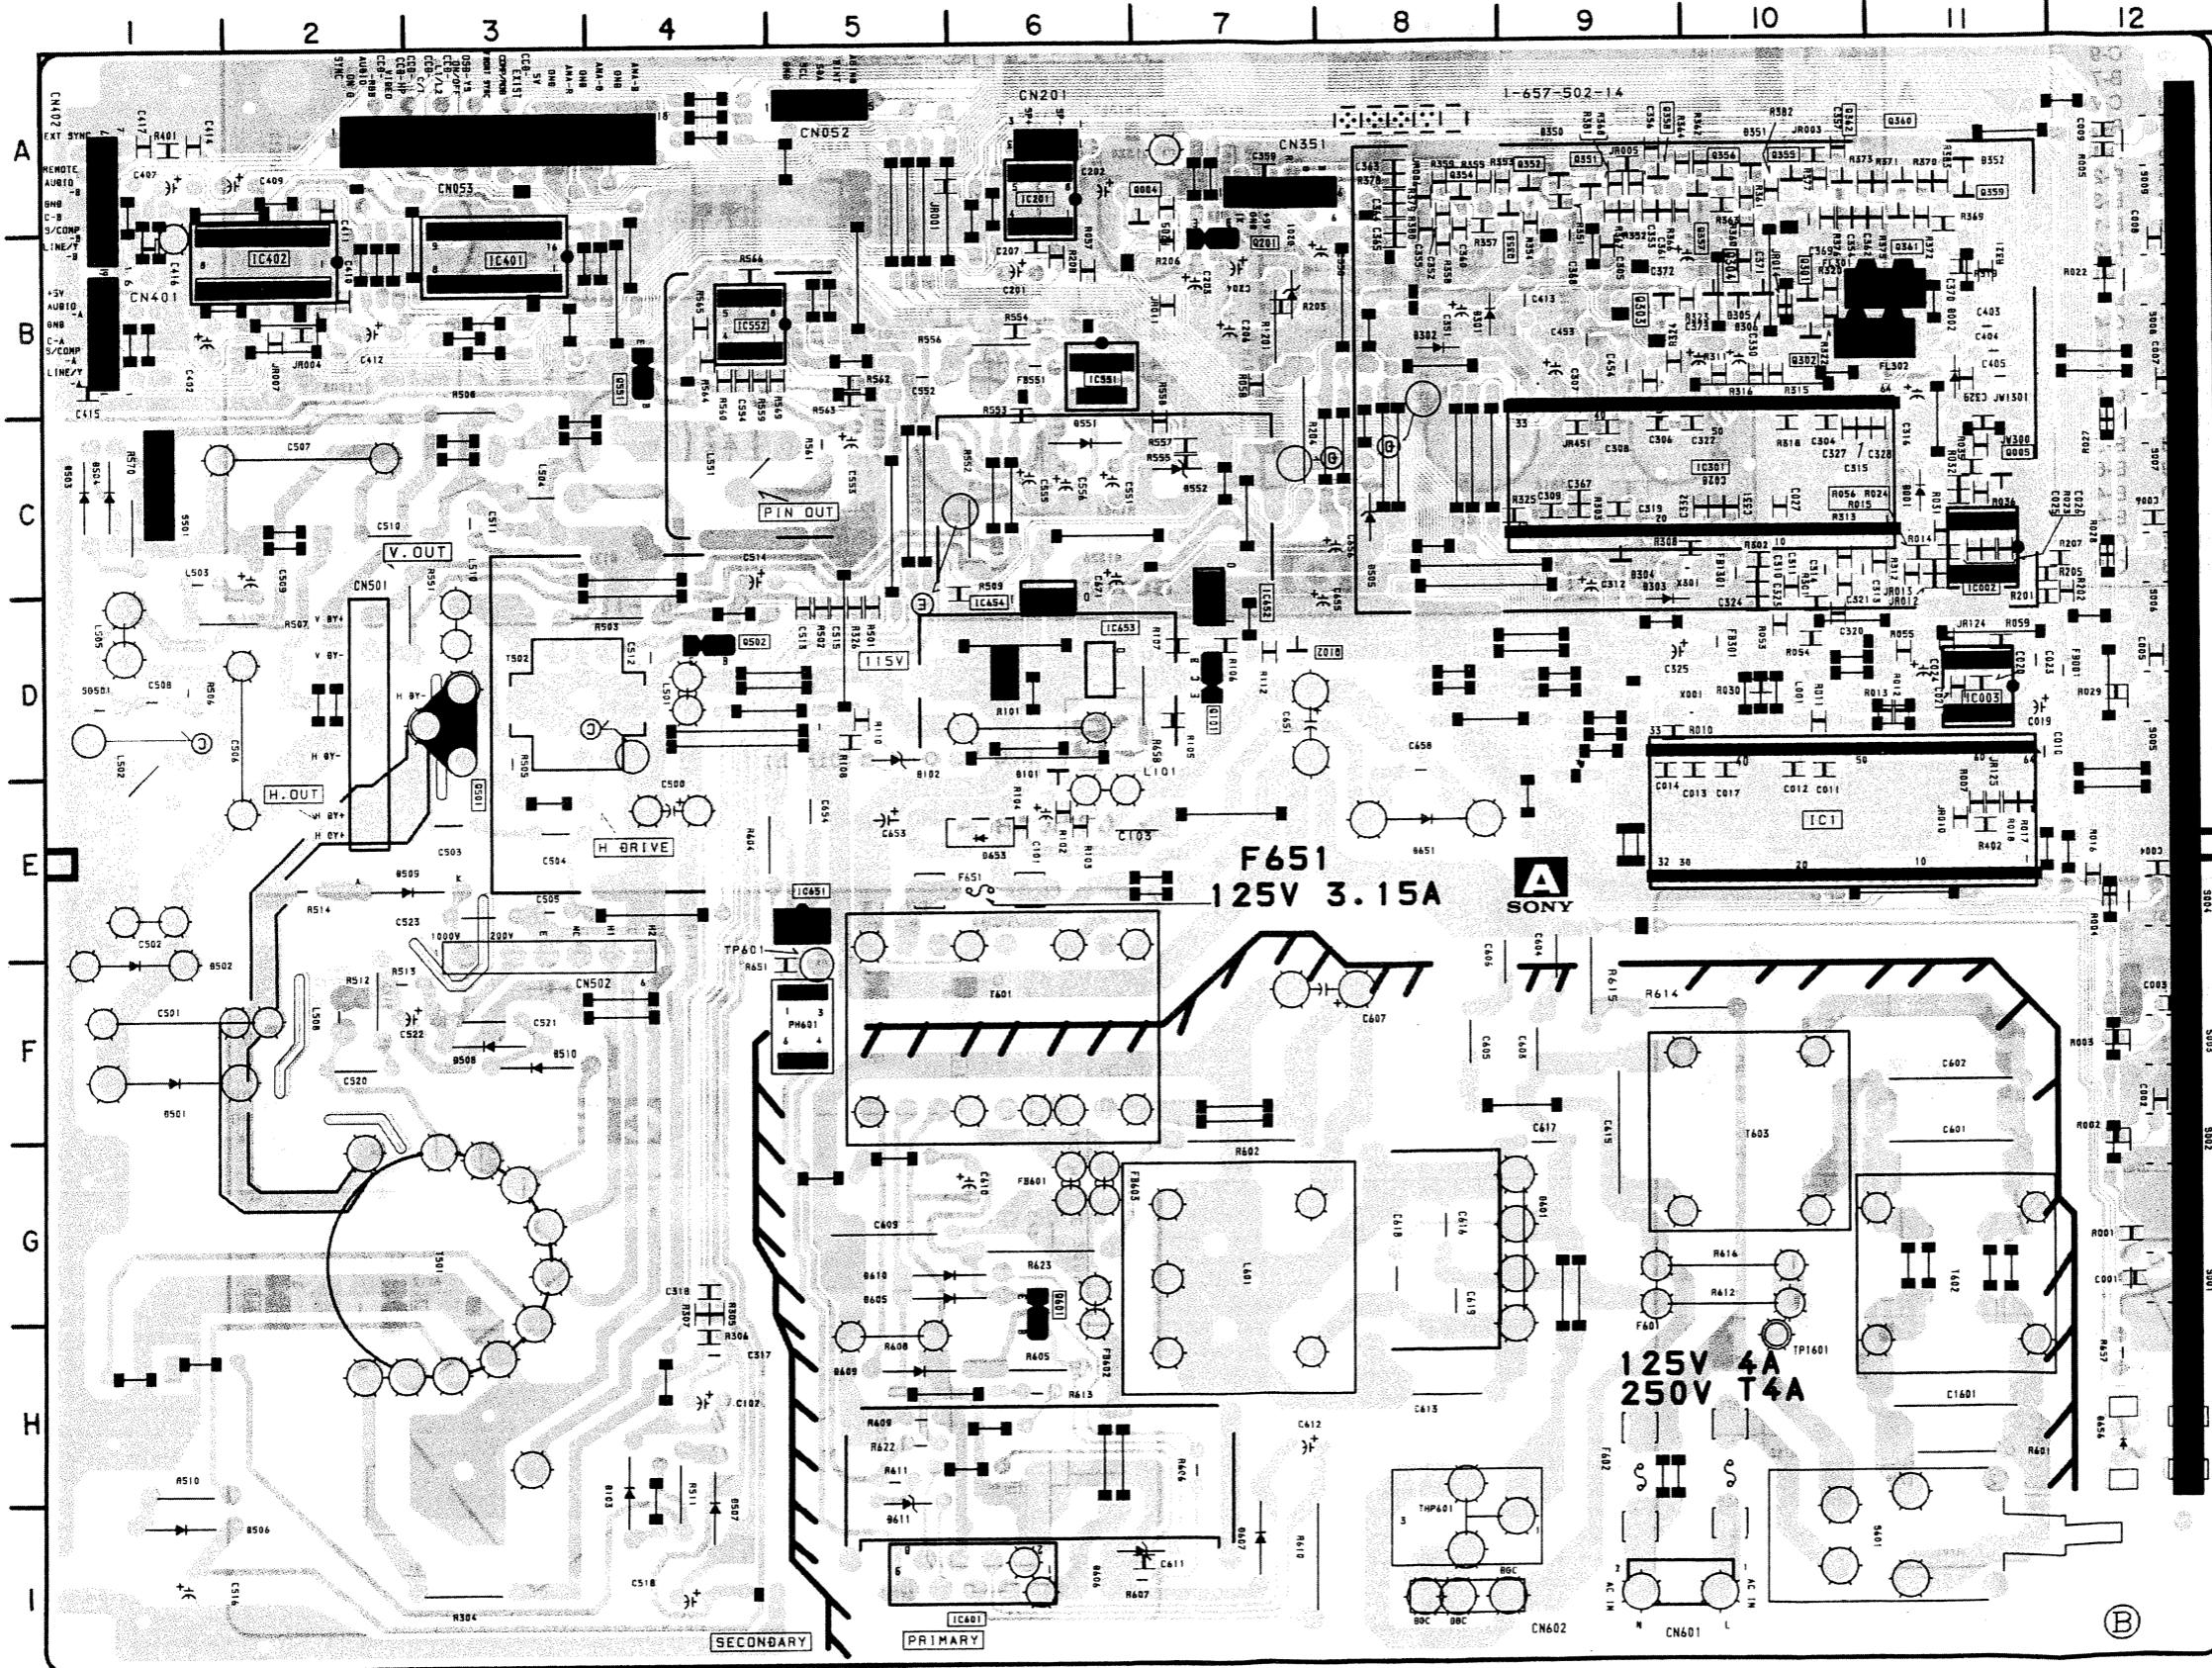**A BOARD**


IC	DIODE
IC001	E-10
IC002	D-11
IC003	D-11
IC201	A-6
IC301	C-10
IC401	B-3
IC402	B-2
IC551	B-6
IC552	B-4
IC601	I-5
IC651	E-5
IC652	D-7
IC653	D-6
IC654	D-6
TRANSISTOR	
Q004	A-7
Q005	C-11
Q101	D-7
Q102	D-7
Q201	B-7
Q301	B-10
Q302	B-10
Q303	B-9
Q304	B-10
Q351	A-9
Q352	A-9
Q353	B-9
Q354	A-8
Q355	A-10
Q356	A-10
Q357	B-10
Q358	A-9
Q359	A-11
Q360	A-11
Q361	A-11
Q362	A-10
Q501	E-3
Q502	D-4
Q551	B-4
Q601	G-6

Q [INPUT SIGNAL SELECT]

— Q BOARD —

Q BOARD


IC	D1304 B-9 D1305 C-9 D1308 B-7 D1309 C-7 D1314 B-3 D1315 B-4 D1316 B-2 D1317 B-3 D1318 B-1 D1319 B-2 D1320 A-1 D1321 B-1 D1322 C-4 D1324 A-5 D1325 B-5 D1326 C-5 D1327 C-5 D1328 B-5 D1329 B-6 D1330 B-4 D1332 C-1 D1333 C-2
TRANSISTOR	IC1301 C-7
DIODE	Q1302 A-8 Q1305 B-6 Q1308 A-3 Q1309 A-2 Q1310 A-1 Q1311 A-1 Q1312 C-4 Q1313 B-5 Q1314 A-4
	D1300 B-8 D1301 B-7 D1302 C-8 D1303 C-9

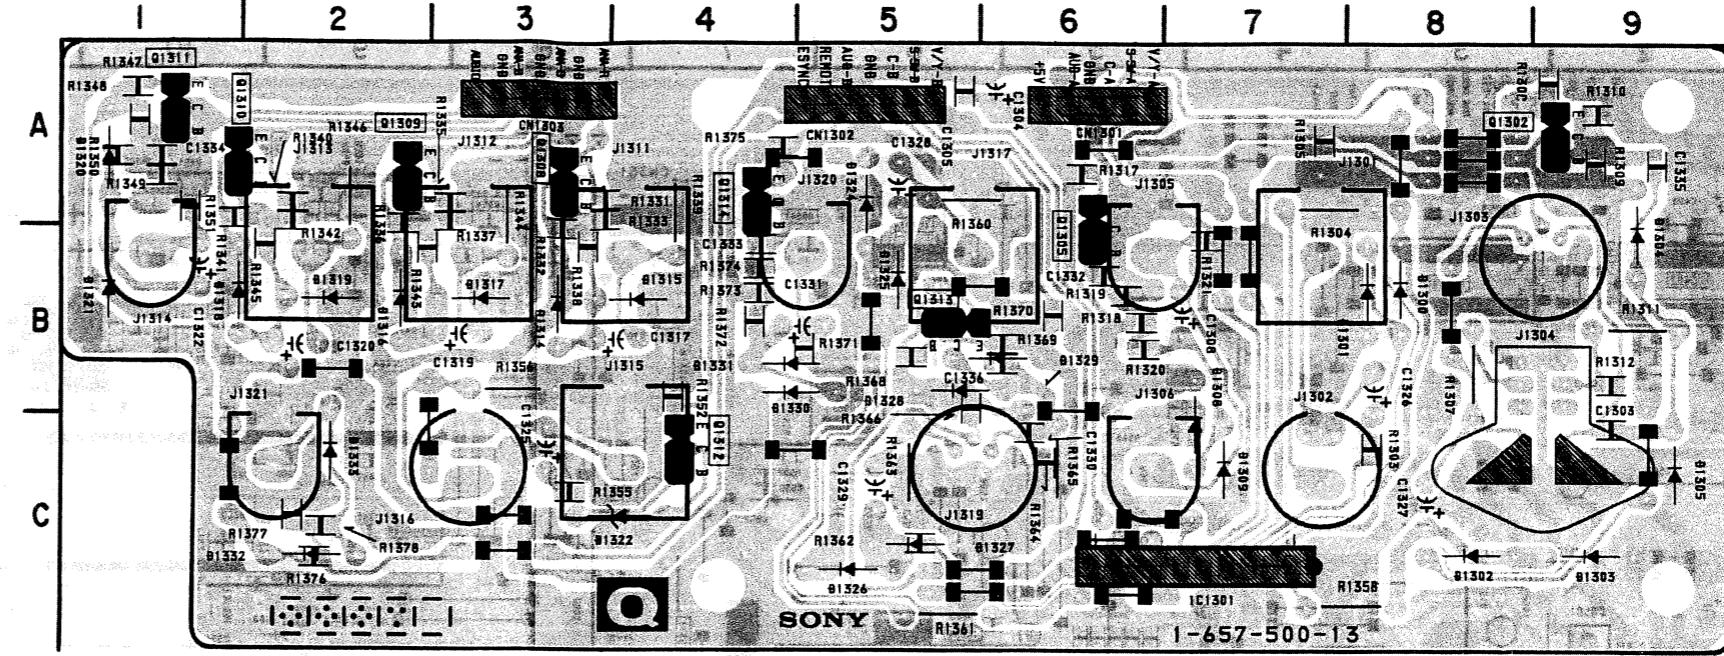

CA

[R.G.B. OUT] (14inch)


— CA BOARD —

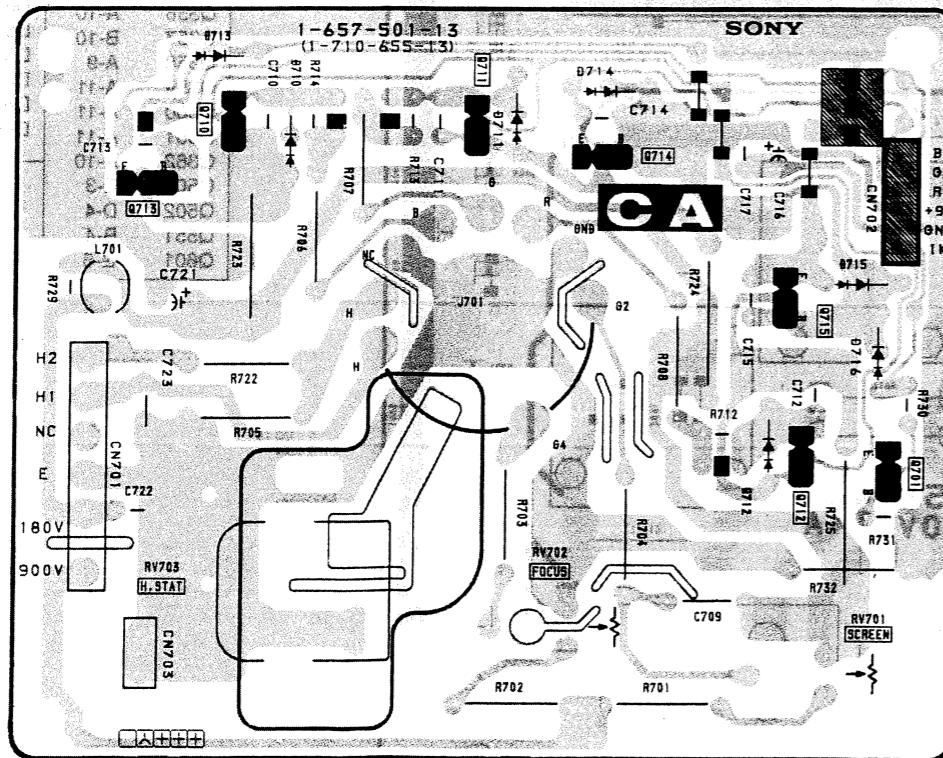

CB

[R.G.B. OUT] (20inch)

— CB BOARD —

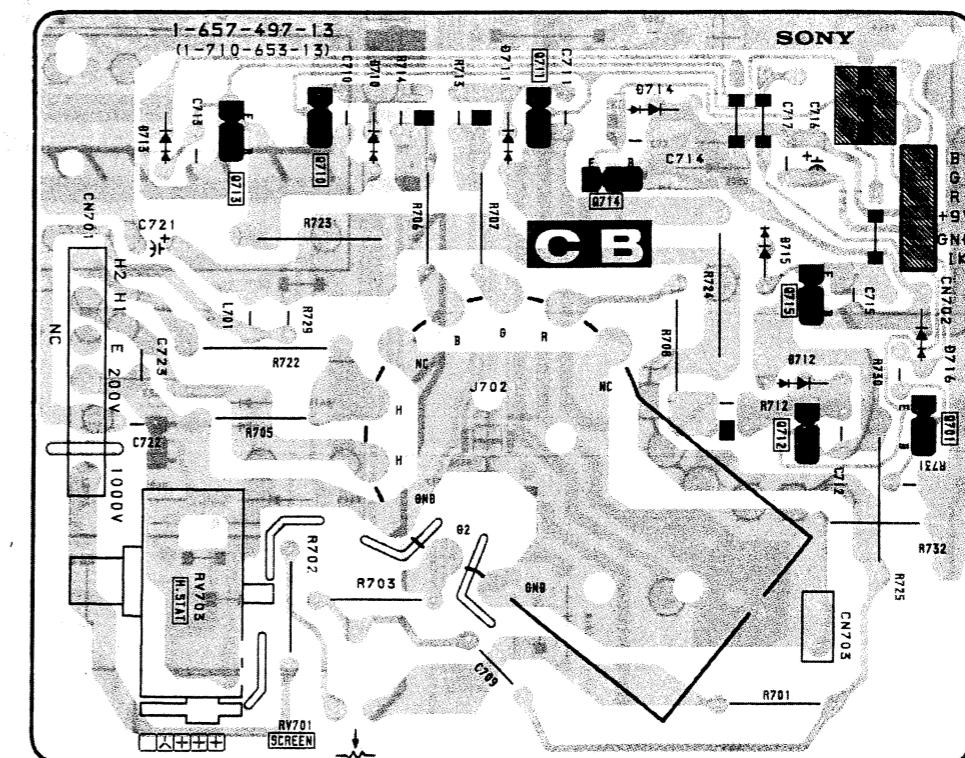

1

2

3

4

5

6

7


8

9


10

11

A


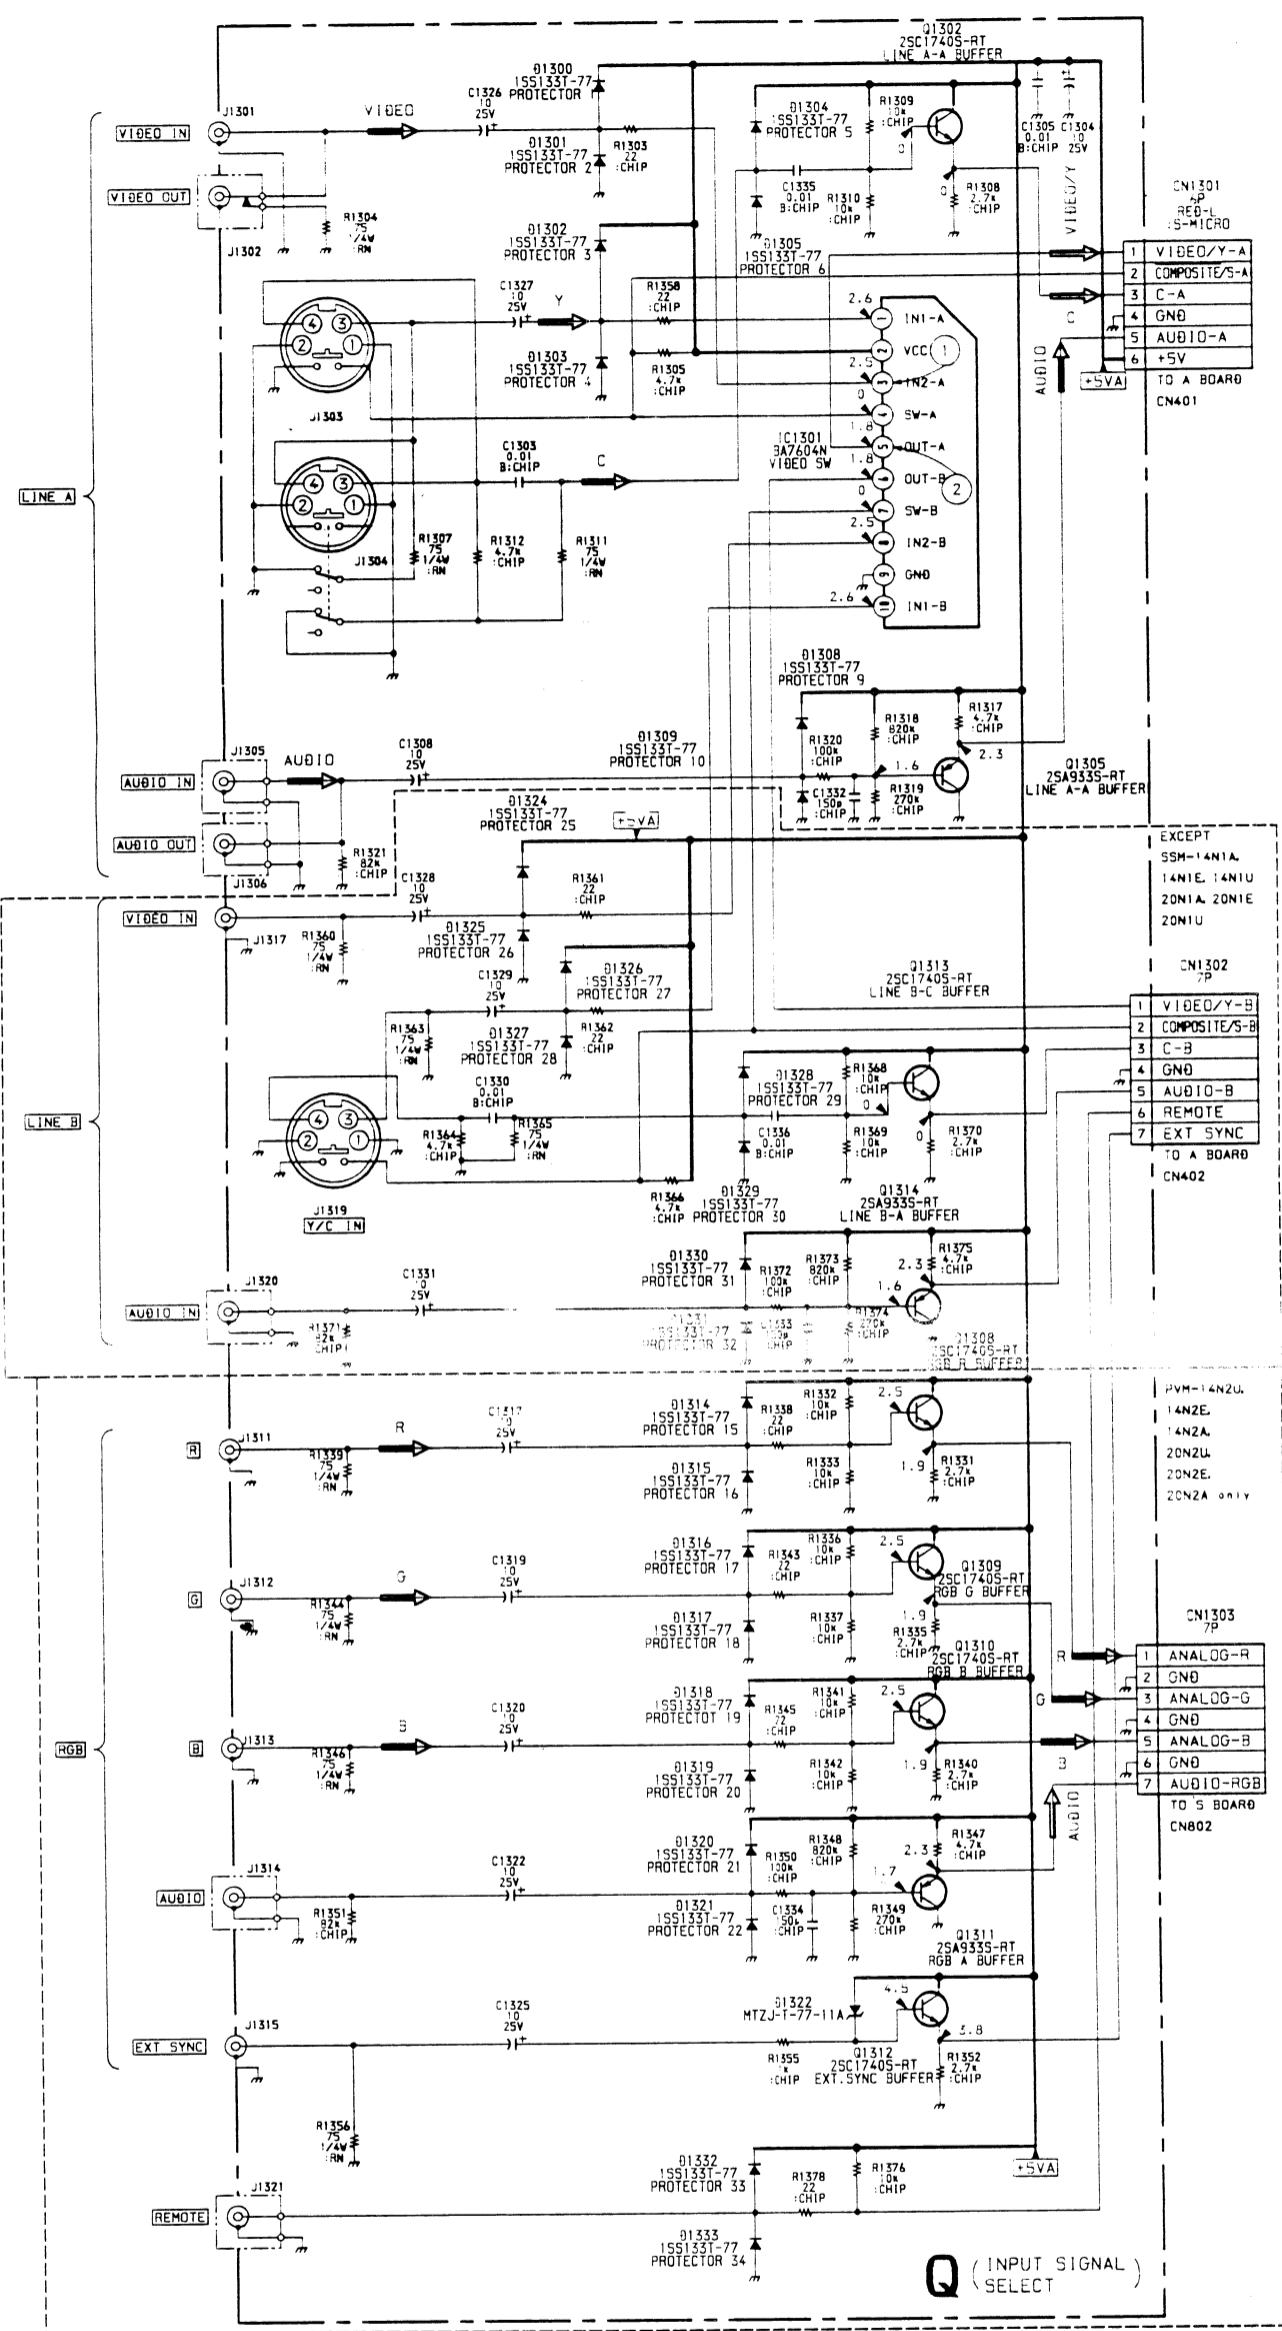


B-S55148<U/C>-Q..

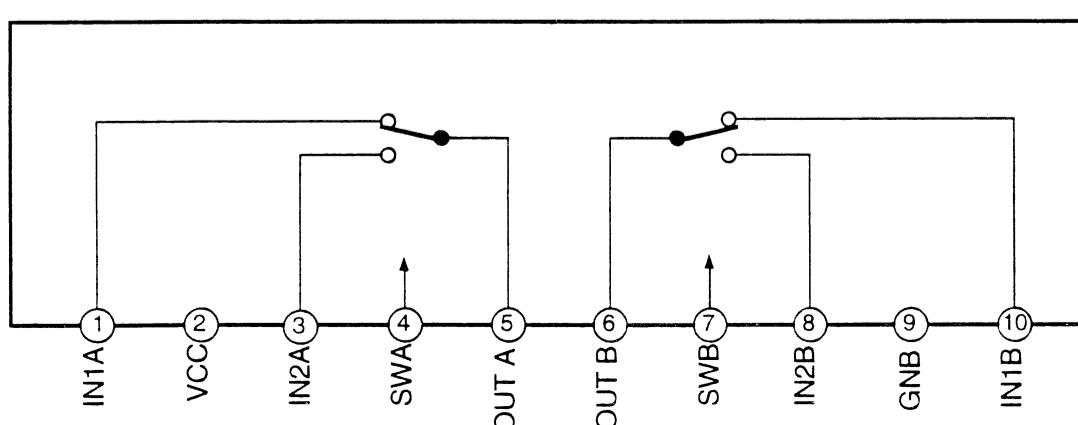
Q BOARD IC1301 BA7604N

CA BOARD *MARK


	NTSC 3.58	NTSC 4.43	PAL	SECAM
Q710 B	156.9	155.3	157.3	156.6
E	156.6	155.0	157.0	156.2
Q711 B	151.3	149.5	150.8	150.8
E	151.1	149.1	150.6	150.3
Q712 B	151.3	149.3	151.1	149.6
E	151.1	148.8	150.8	149.3

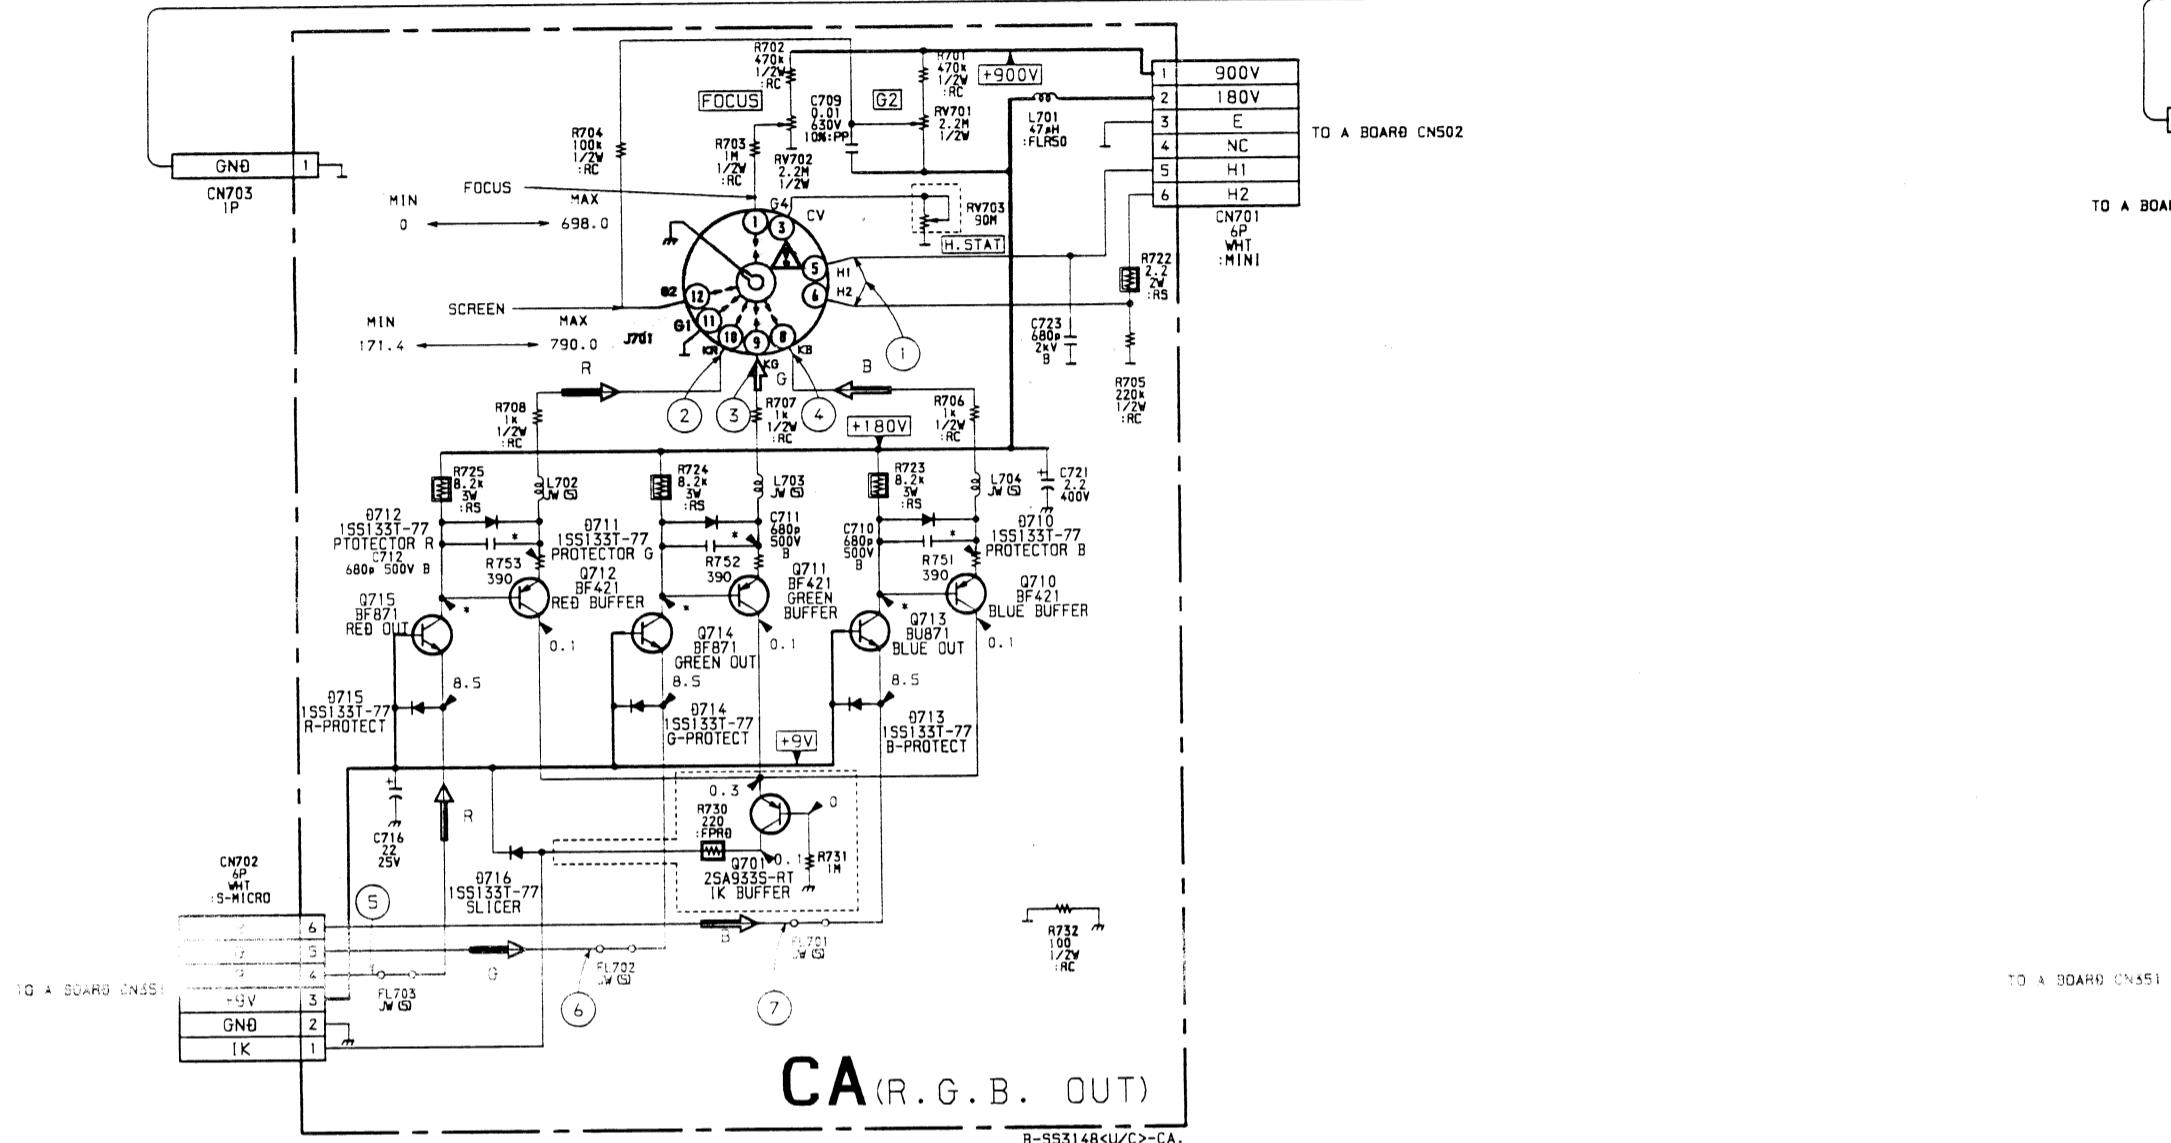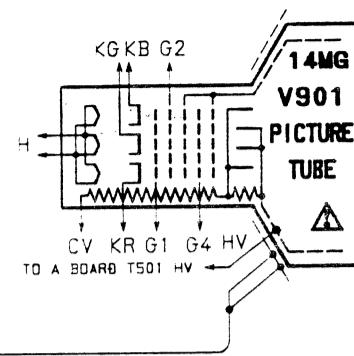



CA BOARD WAVEFORMS

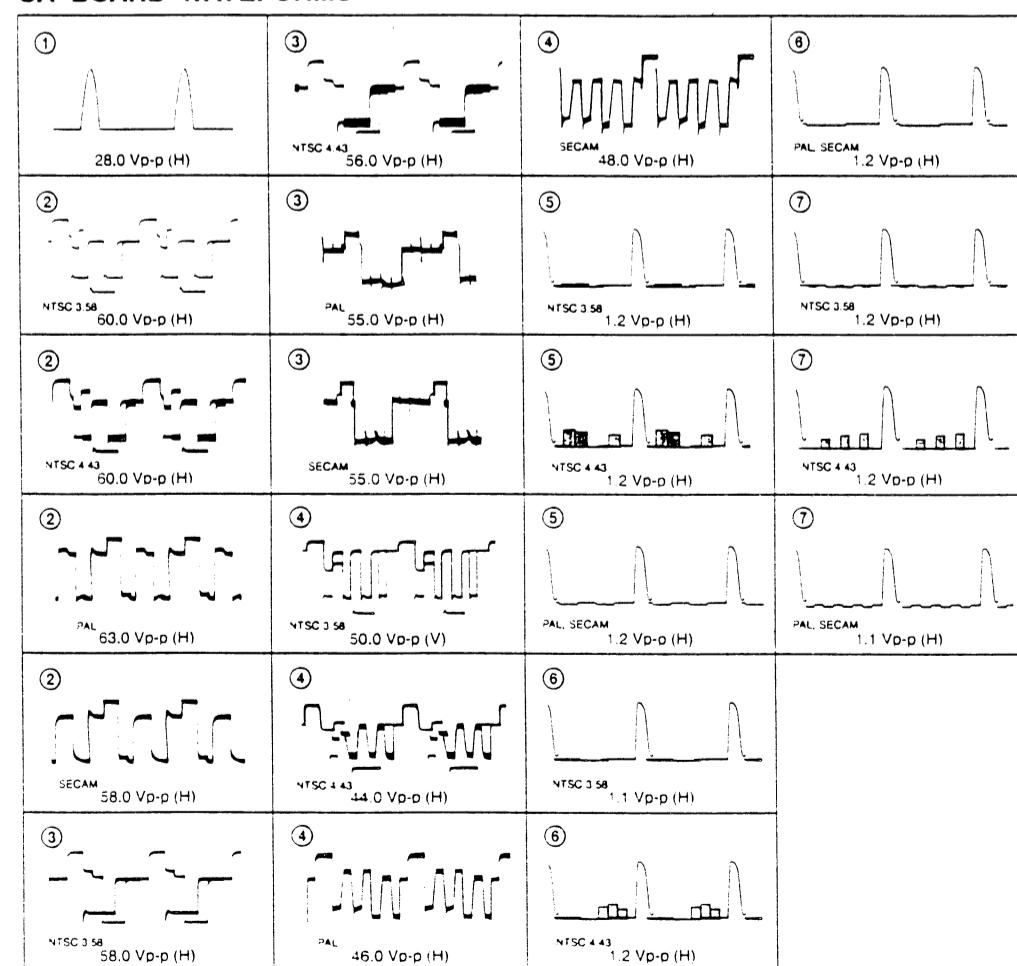


CB BOARD *MARK

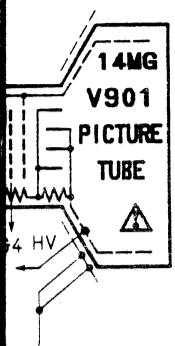


	NTSC 3.58	NTSC 4.43	PAL	SECAM
Q710 B	169.7	169.7	169.0	169.7
E	169.5	169.5	168.8	169.5
Q711 B	164.7	164.7	163.5	164.7
E	164.5	164.5	163.2	164.5
Q712 B	157.8	157.8	154.5	157.8
E	157.5	157.5	154.2	157.5

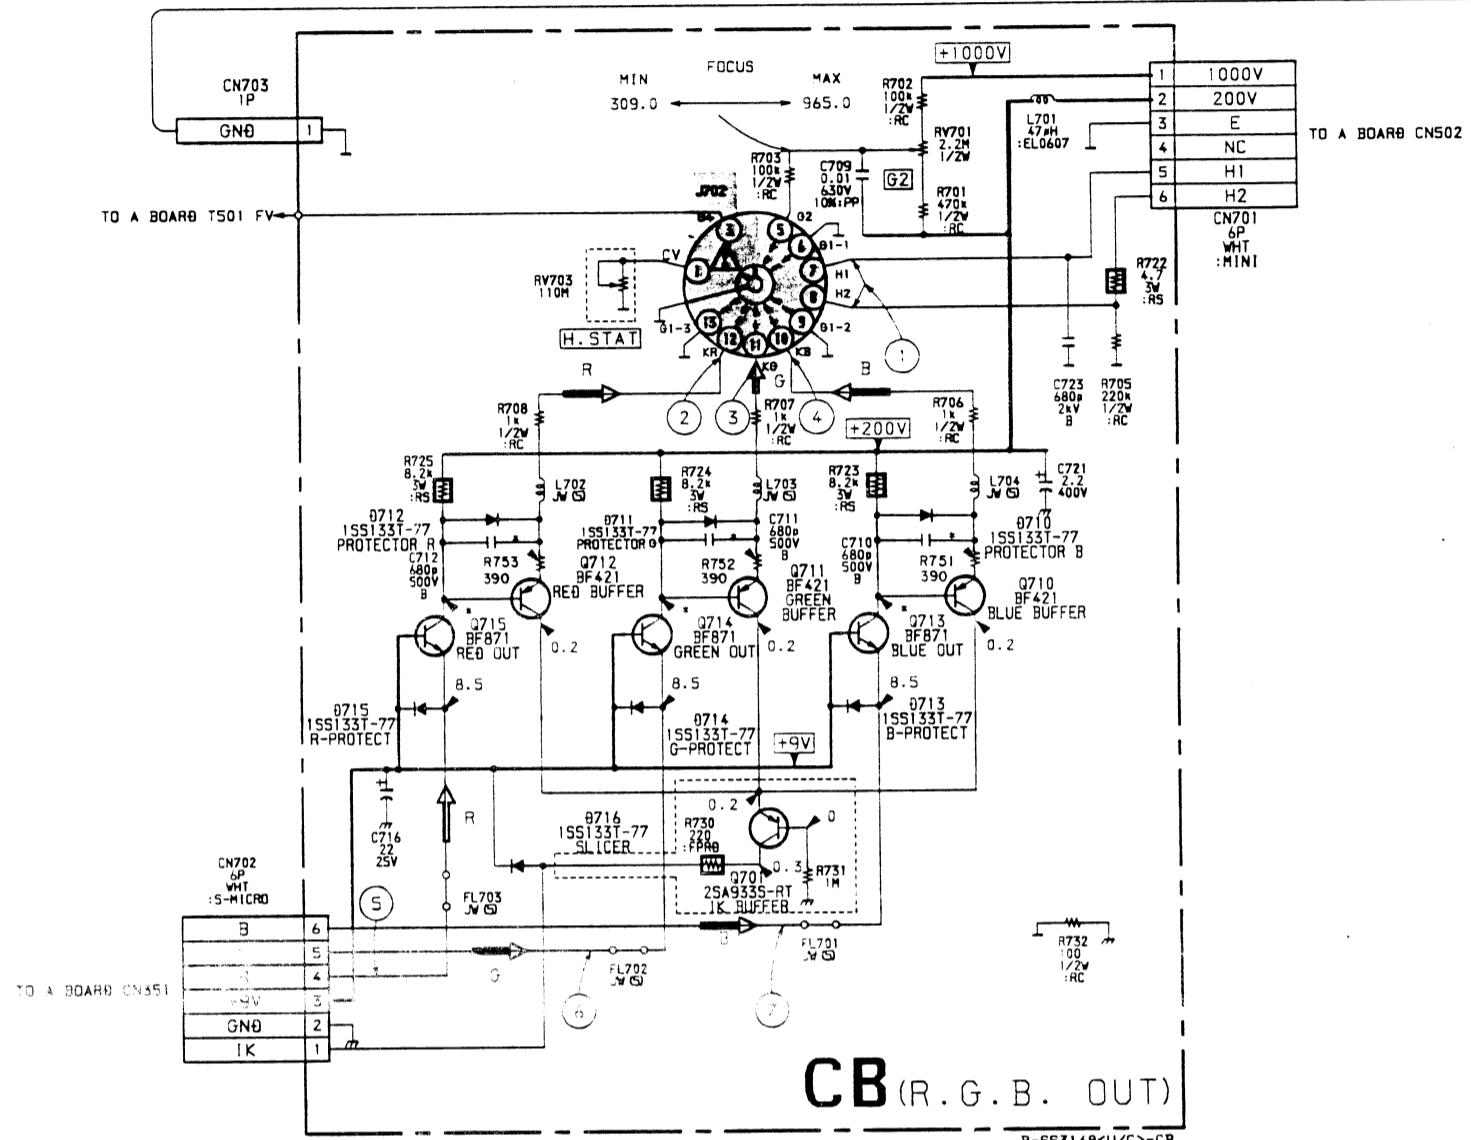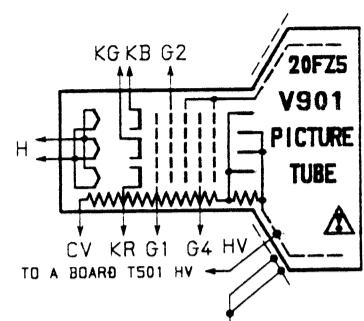

CB BOARD WAVEFORMS

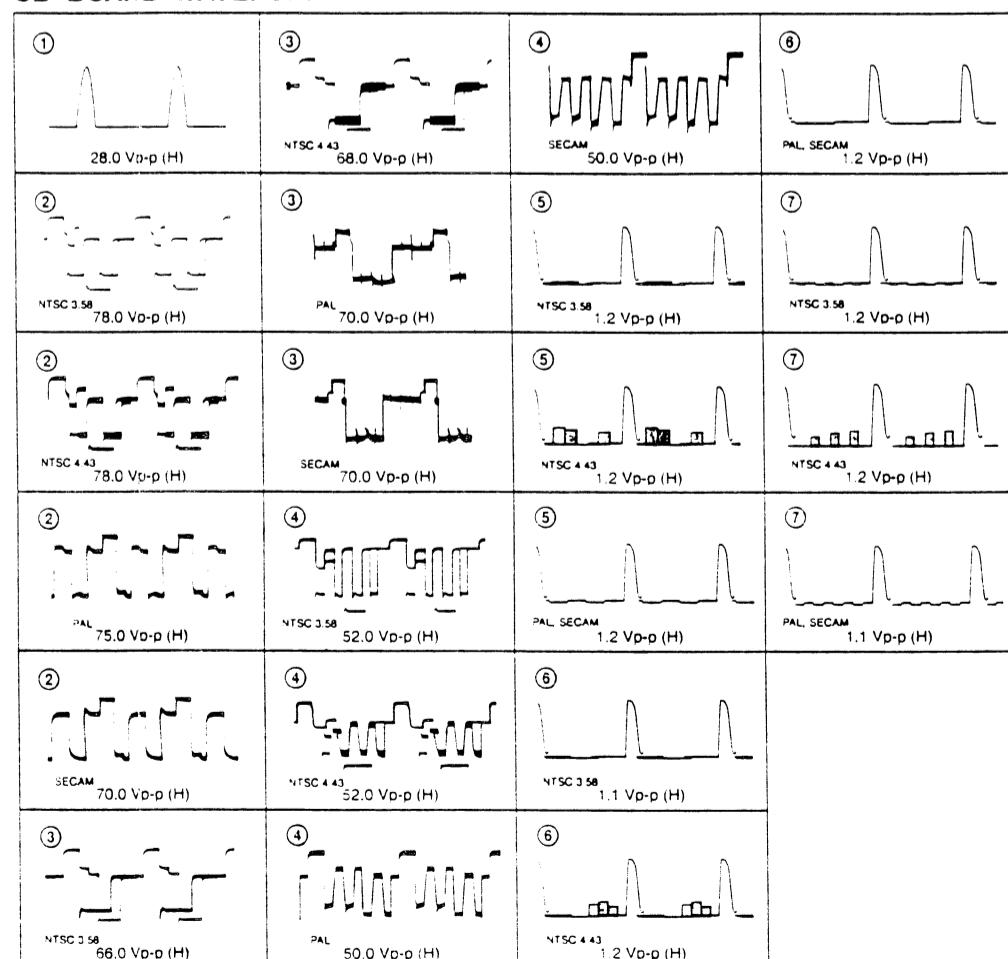


1 2 3 4 5 6 7 8

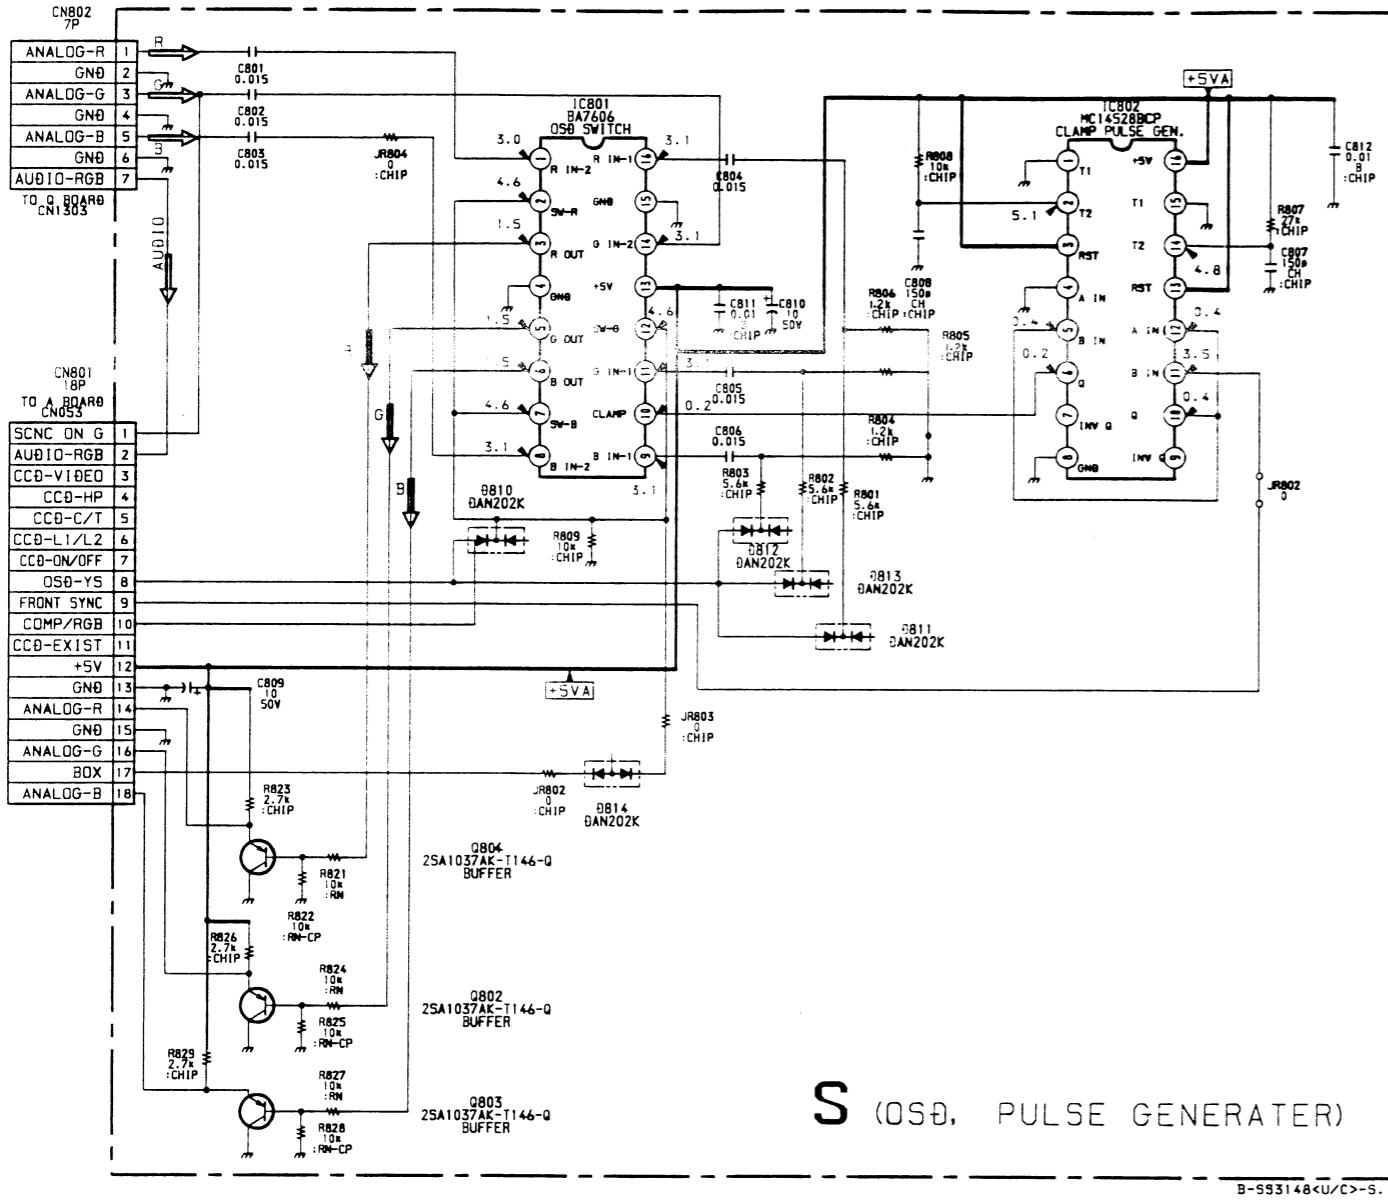


S [OSD, PULSE GENERATOR]


S BOARD

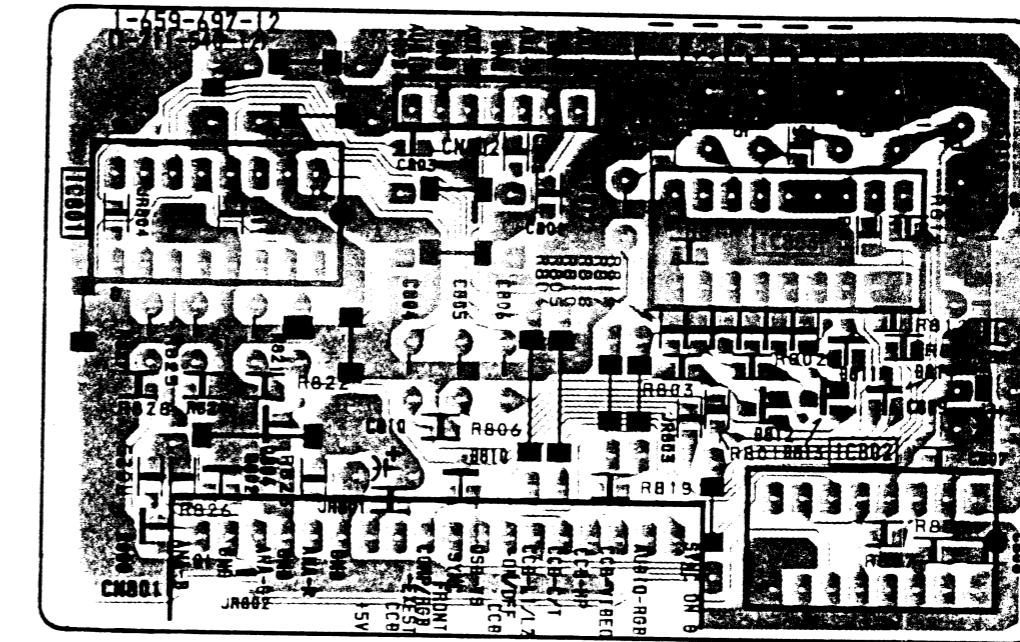

S BOARD IC801 BA7606

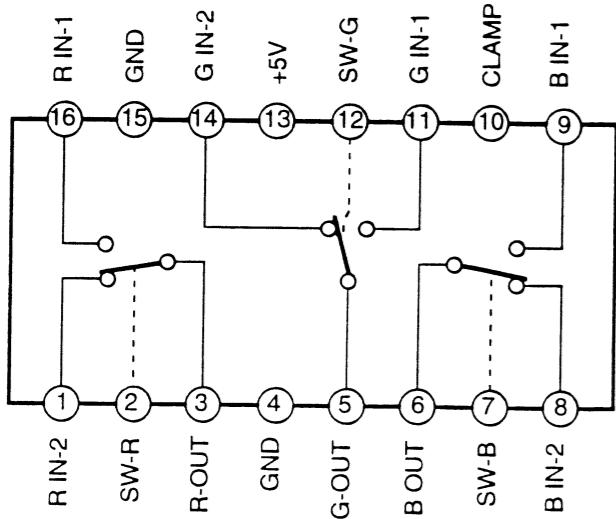

S BOARD IC802 MC14528BCP

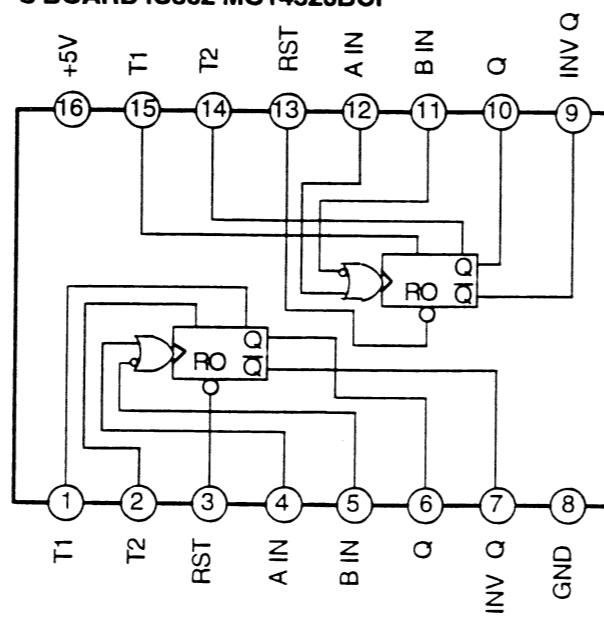

NOTE 3:













- The parts No. of the picture tube differs according to the serial No. described below.
- | | |
|---|-------------------------------|
| Serial No. 6000402 and Higher (PVM-14N1A) | Serial No. 6000142 and Higher |
| Serial No. 6005960 and Higher (PVM-14N1E) | Serial No. 6001149 and Higher |
| Serial No. 6000001 and Higher (PVM-14N1MDE) | Serial No. 6002388 and Higher |
| Serial No. 6006069 and Higher (PVM-14N1U) | Serial No. 6000048 and Higher |
| Serial No. 600127 and Higher (PVM-14N2A) | Serial No. 6000817 and Higher |
| Serial No. 6003540 and Higher (PVM-14N2E) | Serial No. 6001384 and Higher |
| Serial No. 6003311 and Higher (PVM-14N2U) | Serial No. 6001626 and Higher |
| Serial No. 6003696 and Higher (SSM-14N1E) | Serial No. 6001970 and Higher |
| Serial No. 6004630 and Higher (SSM-14N1U) | |

NOTE 1:








- The part number marked *1 or *2 and *3 or *4 are matching with each serial number. See the following serial number.

- *1: Serial No. 6000001 to 6000221 (PVM-14N1A) *2: Serial No. 6000222 and Higher
 Serial No. 6000001 to 6003699 (PVM-14N1E) Serial No. 6003700 and Higher
 Serial No. 6000001 to 6003583 (PVM-14N1U) Serial No. 6003584 and Higher
 Serial No. 6000001 to 6000096 (PVM-14N2A) Serial No. 6000097 and Higher
 Serial No. 6000001 to 6002485 (PVM-14N2E) Serial No. 6002486 and Higher
 Serial No. 6000001 to 6002355 (SSM-14N1E) Serial No. 6002320 and Higher
 Serial No. 6000001 to 6002571 (SSM-14N1U) Serial No. 6002356 and Higher
 Serial No. 6000001 to 600091 (PVM-20N1A) Serial No. 6002572 and Higher
 Serial No. 6000001 to 6000923 (PVM-20N1E) Serial No. 6000924 and Higher
 Serial No. 6000001 to 6001487 (PVM-20N1U) Serial No. 6001488 and Higher
 Serial No. 6000001 to 600048 (PVM-20N2A) Serial No. 600049 and Higher
 Serial No. 6000001 to 6000798 (PVM-20N2E) Serial No. 6000799 and Higher
 Serial No. 6000001 to 6000847 (PVM-20N2U) Serial No. 6000848 and Higher
 Serial No. 6000001 to 6001085 (SSM-20N1E) Serial No. 6001086 and Higher
 Serial No. 6000001 to 6000967 (SSM-20N1U) Serial No. 6000963 and Higher

6-4. SEMICONDUCTORS

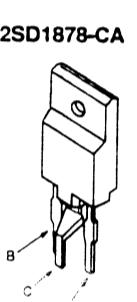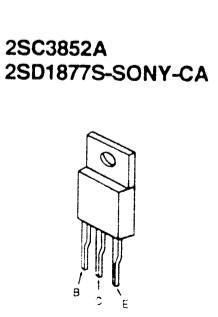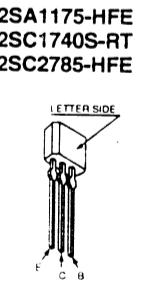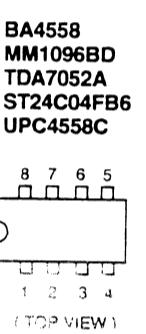


DAN202K-T146

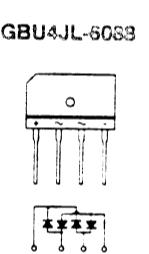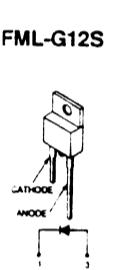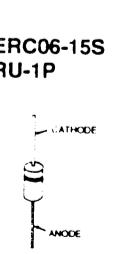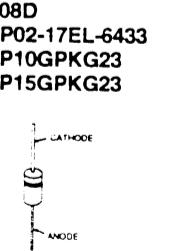

NOTE 2:

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remarks column.
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

7-1. CHASSIS (14 inch)

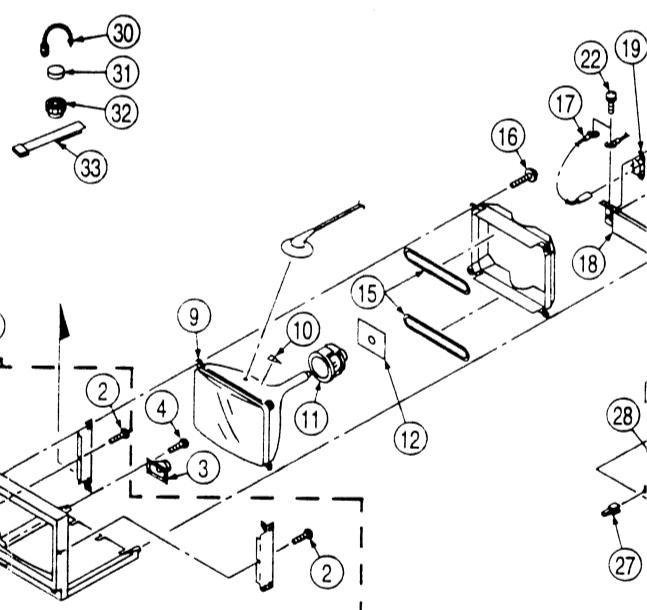

REF NO.	PART NO.	DESCRIPTION	REMARK	REF NO.
1	X-4033-973-1	BEZNET ASSY (PVM-14N2A/14N2E/14N2U)	2	24 *1
	X-4033-974-1	BEZNET ASSY (PVM-14N1A/14N1E/14N1U)	2	*2
	X-4033-975-1	BEZNET ASSY (SSM-14N1E/14N1U)	2	
	X-4033-976-2	BEZNET ASSY (PVM-14N1MDE)		
2	4-039-358-01	SCREW (4x16), (+) BV TAPPING		*1
3	1-505-188-11	SPEAKER (4x7CM)		*2
4	4-039-356-01	SCREW (3x12), (+) BV TAPPING		
5	4-050-073-11	CABINET (PVM-14N1A/14N1E/14N1U/14N2A/14N2E/14N2U, SSM-14N1E/14N1U)		
6	4-050-073-41	CABINET (PVM-14N1MDE)		
7	4-391-825-01	RIVET, NYLON		
8	4-847-802-11	SCREW (M4x8), CLAW		
9	8-738-336-05	PICTURE TUBE 14MG (PVM-14N1A/14N1E/14N1U/14N2A/14N2E/14N2U, SSM-14N1E/14N1U)		

NOTE 3:

8-738-342-05 PICTURE TUBE 14MG

10 3-704-495-01 SPACER, DY

11 A-451-472-11 DY Y14MGAT

12 A-1331-459-A CA BOARD, COMPLETE

13 A-426-442-21 COIL, DEMAGNETIZATION

14 4-203-648-01 SCREW (5), SELF TAPPING

15 * 1-900-214-07 WIRE ASSY, SAFETY EARTH

16 * A-1270-356-A Q BOARD, COMPLETE

(PVM-14N1A/14N1E/14N1MDE/14N1U)

* A-1270-357-A Q BOARD, COMPLETE

(PVM-14N2A/14N2E/14N2U)

* A-1270-362-A Q BOARD, COMPLETE

(SSM-14N1E/14N1U)

17 4-050-078-01 SCREW +PS (M3x10)

18 4-050-074-03 PANEL CONNECTOR

19 A-1-251-263-11 INLET, AC

20 4-050-078-01 SCREW +PS (M3x10)

21 4-050-074-03 PANEL CONNECTOR

22 4-050-077-01 SCREW +PS (4x8)

23 4-050-081-01 PANEL, REAR

The component shading is critical for
Replace on specified.

NOTE 3:

- The parts No. of the picture tube differs according to the serial No. described below.

Serial No. 6000402 and Higher (PVM-14N1A)	Serial No. 6000142 and Higher (PVM-20N1A)
Serial No. 6005960 and Higher (PVM-14N1E)	Serial No. 6001149 and Higher (PVM-20N1E)
Serial No. 6000001 and Higher (PVM-14N1MDE)	Serial No. 6002388 and Higher (PVM-20N1U)
Serial No. 6006069 and Higher (PVM-14N1U)	Serial No. 6000048 and Higher (PVM-20N2A)
Serial No. 6000127 and Higher (PVM-14N2A)	Serial No. 6000817 and Higher (PVM-20N2E)
Serial No. 6003540 and Higher (PVM-14N2E)	Serial No. 6001384 and Higher (PVM-20N2U)
Serial No. 6003311 and Higher (PVM-14N2U)	Serial No. 6001626 and Higher (SSM-20N1E)
Serial No. 6003696 and Higher (SSM-14N1E)	Serial No. 6001970 and Higher (SSM-20N1U)
Serial No. 6004630 and Higher (SSM-14N1U)	

NOTE 1:

- The part number marked *1 or *2 and *3 or *4 are matching with each serial number. See the following serial number.

*11-2 (14M-222222) 100000

*1: Serial No. 6000001 to 6002221 (PVM-14N1A)
 Serial No. 6000001 to 6003699 (PVM-14N1E)
 Serial No. 6000001 to 6003583 (PVM-14N1U)
 Serial No. 6000001 to 6000096 (PVM-14N2A)
 Serial No. 6000001 to 6002485 (PVM-14N2E)
 Serial No. 6000001 to 6002319 (PVM-14N2U)
 Serial No. 6000001 to 6002355 (SSM-14N1E)
 Serial No. 6000001 to 6002571 (SSM-14N1U)

*2: Serial No. 6000222 and Higher (PVM-14N1A)
 Serial No. 6003700 and Higher (PVM-14N1E)
 Serial No. 6003584 and Higher (PVM-14N1U)
 Serial No. 6000097 and Higher (PVM-14N2A)
 Serial No. 6002486 and Higher (PVM-14N2E)
 Serial No. 6002320 and Higher (PVM-14N2U)
 Serial No. 6002356 and Higher (SSM-14N1E)
 Serial No. 6002572 and Higher (SSM-14N1U)

*3: Serial No. 6000001 to 6000091 (PVM-20N1A)
 Serial No. 6000001 to 6000923 (PVM-20N1E)
 Serial No. 6000001 to 6001487 (PVM-20N1U)
 Serial No. 6000001 to 6000048 (PVM-20N2A)
 Serial No. 6000001 to 6000798 (PVM-20N2E)
 Serial No. 6000001 to 6000847 (PVM-20N2U)
 Serial No. 6000001 to 6001085 (SSM-20N1E)
 Serial No. 6000001 to 6000967 (SSM-20N1U)

*4: Serial No. 6000092 and Higher (PVM-20N1A)
 Serial No. 6000924 and Higher (PVM-20N1E)
 Serial No. 6001488 and Higher (PVM-20N1U)
 Serial No. 6000049 and Higher (PVM-20N2A)
 Serial No. 6000799 and Higher (PVM-20N2E)
 Serial No. 6000848 and Higher (PVM-20N2U)
 Serial No. 6001086 and Higher (SSM-20N1E)
 Serial No. 6000963 and Higher (SSM-20N1U)

SECTION 7

EXPLODED VIEWS

NOTE 2:

- Items with no part number and no description are not stocked because they are seldom required for routine service.
 - The construction parts of an assembled part are indicated with a collation number in the remarks column.
 - Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.




The components identified by shading and marked Δ are critical for safety.
Replace only with the part number specified.


Les composants identifiés par une trame et une marque  sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

7-1. CHASSIS (14 inch)

GBU4JL-5083



MTZJ-11A
MTZJ-5.1B
MTZJ-7.5B
MTZJ-6.2C
RD5.1ESB2
1SS133



MTZ-L-36B




REF NO.	PART NO.	DESCRIPTION	REMARK	REF NO.	PART NO.	DESCRIPTION	REMARK
1	X-4033-973-1	BEZNET ASSY (PVM-14N2A/14N2E/14N2U)	2	24	* 1 * A-1297-543-A	A BOARD, COMPLETE	
	X-4033-974-1	BEZNET ASSY (PVM-14N1A/14N1E/14N1U)	2		* 2 * A-1297-543-B	A BOARD, COMPLETE	
	X-4033-975-1	BEZNET ASSY (SSM-14N1E/14N1U)	2		(PVM-14N1A/14N1E/14N1U)		
2	X-4033-976-2	BEZNET ASSY (PVM-14N1MDE)			* 1 * A-1297-546-A	A BOARD, COMPLETE	
	4-039-358-01	SCREW (4x16), (+) BV TAPPING			* 2 * A-1297-546-B	A BOARD, COMPLETE	
3	1-505-188-11	SPEAKER (4x7CM)			* 1 * A-1297-593-A	A BOARD, COMPLETE	
4	4-039-356-01	SCREW (3x12), (+) BV TAPPING			* 2 * A-1297-593-B	A BOARD, COMPLETE	
5	4-050-073-11	CABINET (PVM-14N1A/14N1E/14N1U/14N2A/14N2E/14N2U, SSM-14N1E/14N1U)			(SSM-14N1E/14N1U)		
	4-050-073-41	CABINET (PVM-14N1MDE)			* A-1298-039-A	A BOARD, COMPLETE	
6	4-389-320-21	HANDLE			(PVM-14N1MDE)		
7	4-391-825-01	RIVET, NYLON		25	△ 1-453-201-11	TRANSFORMER ASSY, FLYBACK NX-2610/U2A (PVM-14N1A/14N1E/14N1U/14N2A/14N2E/14N2U, SSM-14N1E/14N1U)	
8	4-847-802-11	SCREW (M4x8), CLAW			△ 1-540-006-12	TRANSFORMER ASSY, FLYBACK NX-2610 (PVM-14N1MDE)	
9	△ 8-738-336-05	PICTURE TUBE 14MG (PVM-14N1A/14N1E/14N1U/14N2A/14N2E/14N2U, SSM-14N1E/14N1U)					
				26	△ 1-571-433-31	SWITCH, PUSH (AC POWER)	
10	3-704-495-01	SPACER, DY		27	4-050-085-01	BUTTON, POWER SWITCH	
11	△ 8-451-472-11	DY Y14MGAT		28	△ 1-532-746-11	FUSE, GLASS TUBE 4A/125V (PVM-14N1U/14N2U, SSM-14N1U)	
12	* A-1331-459-A	CA BOARD, COMPLETE			△ 1-576-231-21	FUSE (H.B.C.) 4A/250V (PVM-14N1A/14N1E/14N2A/14N2E, SSM-14N1E)	
13	△ 1-426-442-21	COIL, DEMAGNETIZATION			△ 1-576-231-11	FUSE (H.B.C.) 4A/250V (PVM-14N1MDE)	
14				29	* A-1390-638-A	S BOARD, COMPLETE	
15				30	4-308-870-00	CLIP, LEAD WIRE	
16	4-203-648-01	SCREW (5), SELF TAPPING		31	1-452-032-00	MAGNET,DISC	
17	* 1-900-214-07	WIRE ASSY, SAFETY EARTH		32	1-452-094-00	MAGNET, ROTATABLE DISK; 15MMØ	
18	* A-1270-356-A	Q BOARD, COMPLETE (PVM-14N1A/14N1E/14N1MDE/14N1U)		33	X-4309-098-00	PERMALLOY ASSY, CONVERGENCE	
	* A-1270-357-A	Q BOARD, COMPLETE (PVM-14N2A/14N2E/14N2U)					
	* A-1270-362-A	Q BOARD, COMPLETE (SSM-14N1E/14N1U)		34	△ 1-576-231-11	FUSE (H.B.C) 4A/250V (PVM-14N1MDE)	
19	△ 1-251-263-11	INLET, AC					
20	4-050-078-01	SCREW +P (M3x10)					
21	4-050-074-03	PANEL CONNECTOR					
22	4-050-077-01	SCREW +PS (4x8)					
23	1-050-091-01	PANEL READ					

The components identified by shading and marked Δ are critical for safety.
Replace only with the part number specified.

Les composants identifiés par une trame et une marque Δ sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

7-2. CHASSIS (20 inch)

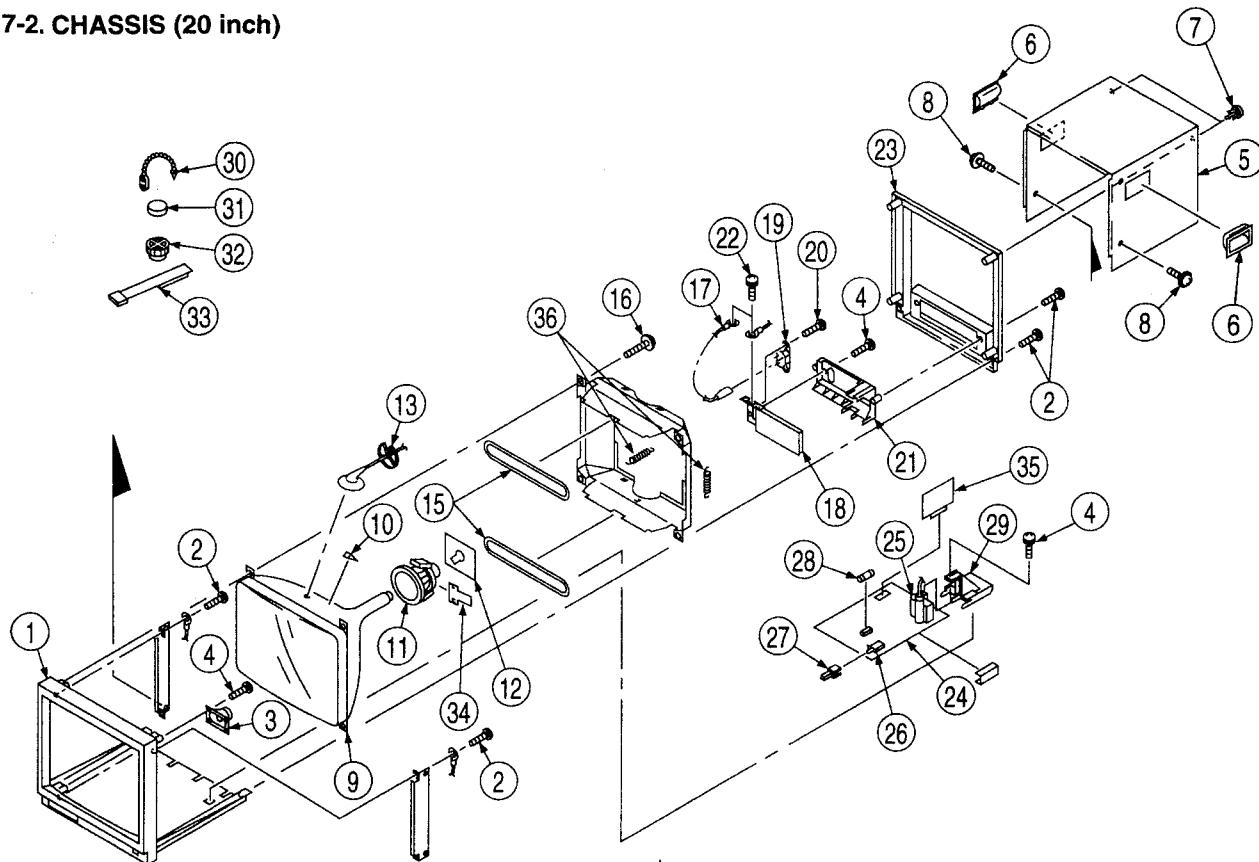

REF NO.	PART NO.	DESCRIPTION	REMARK	REF NO.	PART NO.	DESCRIPTION	REMARK
1	X-4033-977-1	BEZNET ASSY (PVM-20N2A/20N2E/20N2U)		21	4-050-074-03	PANEL CONNECTOR	
	X-4033-978-1	BEZNET ASSY (PVM-20N1A/20N1E/20N1U)		22	4-050-077-01	SCREW +PS (4x8)	
	X-4033-979-1	BEZNET ASSY (SSM-20N1E/20N1U)		23	4-050-063-01	PANEL, REAR	
2	4-039-358-01	SCREW (4x16), (+) BV TAPPING		24	* A-1297-544-A	A BOARD, COMPLETE	
3	1-505-188-11	SPEAKER (4x7CM)			* A-1297-544-B	A BOARD, COMPLETE	
4	4-039-356-01	SCREW (3x12), (+) BV TAPPING			(PVM-20N1A/20N1E/20N1U)		
5	4-050-060-11	CABINET			* A-1297-545-A	A BOARD, COMPLETE	
6	4-389-320-21	HANDLE			* A-1297-545-B	A BOARD, COMPLETE	
7	4-391-825-01	RIVET, NYLON			(PVM-20N2A/20N2E/20N2U)		
8	4-847-802-11	SCREW (M4x8), CLAW			* A-1297-592-A	A BOARD, COMPLETE	
9	A 8-736-130-05	PICTURE TUBE 20FZ5			* A-1297-592-B	A BOARD, COMPLETE	
	NOTE 3:				(SSM-20N1E/20N1U)		
10	A 8-736-135-05	PICTURE TUBE 20FZ5		25	A 1-453-202-11	TRANSFORMER ASSY. FLYBACK NX-2611/U2A	
11	A 1-451-349-12	DEFLECTION YOKE (Y20FZ5)		26	A 1-571-433-31	SWITCH, PUSH (AC POWER)	
12	* A-1331-458-A	CB BOARD, COMPLETE		27	4-050-085-01	BUTTON, POWER SWITCH	
13	* 3-704-372-01	HOLDER, HV CABLE		28	A 1-332-746-11	FUSE, GLASS TUBE 4A/125V (PVM-20N1U/20N2U, SSM-20N1U)	
14	A 1-411-750-11	COIL DEMAGNETIZATION			A 1-576-231-21	FUSE (H.R.C.) 4A/250V (PVM-20N1A/20N1E/20N2A/20N2E, SSM-20N1E)	
15	4-203-648-01	SCREW (5), SELF TAPPING		29	4-050-066-01	HOLDER, PCB	
16	* 1-900-214-07	WIRE ASSY, SAFETY EARTH		30	4-308-870-00	CLIP, LEAD WIRE	
17	* A-1270-356-A	Q BOARD, COMPLETE (PVM-20N1A/20N1E/20N1U)		31	1-452-032-00	MAGNET, DISC	
18	* A-1270-357-A	Q BOARD, COMPLETE (PVM-20N2A/20N2E/20N2U)		32	1-452-094-00	MAGNET, ROTATABLE DISK; 15MMØ	
	* A-1270-362-A	Q BOARD, COMPLETE (SSM-20N1E/20N1U)		33	X-4309-608-0	PERMALLOY ASSY, CONVERGENCE	
19	A 1-251-263-11	INLET AC		34	4-030-120-01	PLATE, CORRECTION, TLV	
20	4-050-078-01	SCREW +P (M3x10)		35	* A-1390-638-A	S BOARD, COMPLETE	
				36	4-369-318-31	SPRING TENSION	

Q

SECTION 8

ELECTRICAL PARTS LIST

The components identified by shading and marked Δ are critical for safety.
Replace only with part number specified.

Les composants identifiés par une trame et une marque Δ sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

When indicating parts by reference number, please include the board name.

- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- RESISTORS**
- All resistors are in ohms
 - F : nonflammable

- The components identified by \square in this manual have been carefully factory-selected for each set in order to satisfy regulations regarding X-ray radiation. Should replacement be required, replace only with the value originally used.
- There are some cases the reference number on one board overlaps on the other board. Therefore, when ordering parts by the reference number, please include the board name.

REF NO.	PART NO.	DESCRIPTION	REMARK	REF NO.	PART NO.	DESCRIPTION	REMARK
	*A-1270-356-A	Q BOARD, COMPLETE (PVM-14N1A, 14N1E, ***** 14N1MDE, 14N1U, 20N1A, 20N1E, 20N1U)		C1330	I-164-232-11	CERAMIC CHIP 0.01 μ F 10% 50V (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)	
	*A-1270-357-A	Q BOARD, COMPLETE (PVM-14N2A, 14N2E, 14N2U, ***** 20N2A, 20N2E, 20N2U)		C1331	I-126-096-11	ELECT 10 μ F 20% 25V (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)	
	*A-1270-362-A	Q BOARD, COMPLETE (SSM-14N1E, 14N1U, 20N1E, ***** 20N1U)		C1332	I-163-121-00	CERAMIC CHIP 150PF 5% 50V	
				C1333	I-163-121-00	CERAMIC CHIP 150PF 5% 50V (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)	
				C1334	I-163-121-00	CERAMIC CHIP 150PF 5% 50V (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)	
I-694-045-11		TERMINAL BOARD ASSY, I/O (J1301, 1302, 1305, 1306, 1311-1315, 1317, 1320, 1321) (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)		C1335	I-164-232-11	CERAMIC CHIP 0.01 μ F 10% 50V	
I-694-046-11		TERMINAL BOARD ASSY, I/O (J1301, 1302, 1305, 1306, 1317, 1320) (PVM-14N1A, 14N1E, 14N1U, 20N1A, 20N1E, 20N1U)		C1336	I-164-232-11	CERAMIC CHIP 0.01 μ F 10% 50V (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)	<CONNECTOR>
I-694-047-11		TERMINAL BOARD ASSY, I/O (J1301, 1302, 1305, 1306) (SSM-14N1E, 14N1U, 20N1E, 20N1U)		CN1301	* 1-564-521-11	PLUG, CONNECTOR 6P	
7-627-557-48		SCREW (2.6X10), +P TAPPING		CN1302	* 1-564-522-11	PLUG, CONNECTOR 7P (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)	
*3-175-740-01		TERMINAL (PVM-14N1MDE)		CN1303	* 1-564-522-11	PLUG, CONNECTOR 7P (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)	<DIODE>
*3-175-741-01		NUT (PVM-14N1MDE)		D1300	8-719-991-33	DIODE ISS133T-77	
*3-175-742-01		WASHER (PVM-14N1MDE)		D1301	8-719-991-33	DIODE ISS133T-77	
		<CAPACITOR >		D1302	8-719-991-33	DIODE ISS133T-77	
C1303	I-164-232-11	CERAMIC CHIP 0.01 μ F 10% 50V		D1303	8-719-991-33	DIODE ISS133T-77	
C1304	I-126-096-11	ELECT 10 μ F 20% 25V		D1304	8-719-991-33	DIODE ISS133T-77	
C1305	I-164-232-11	CERAMIC CHIP 0.01 μ F 10% 50V		D1305	8-719-991-33	DIODE ISS133T-77	
C1308	I-126-096-11	ELECT 10 μ F 20% 25V		D1308	8-719-991-33	DIODE ISS133T-77	
C1317	I-126-096-11	ELECT 10 μ F 20% 25V (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)		D1309	8-719-991-33	DIODE ISS133T-77	
C1319	I-126-096-11	ELECT 10 μ F 20% 25V (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)		D1314	8-719-991-33	DIODE ISS133T-77 (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)	
C1320	I-126-096-11	ELECT 10 μ F 20% 25V (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)		D1315	8-719-991-33	DIODE ISS133T-77 (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)	
C1322	I-126-096-11	ELECT 10 μ F 20% 25V (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)		D1316	8-719-991-33	DIODE ISS133T-77 (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)	
C1325	I-126-096-11	ELECT 10 μ F 20% 25V (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)		D1317	8-719-991-33	DIODE ISS133T-77 (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)	
C1326	I-126-096-11	ELECT 10 μ F 20% 25V		D1318	8-719-991-33	DIODE ISS133T-77 (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)	
C1327	I-126-096-11	ELECT 10 μ F 20% 25V		D1319	8-719-991-33	DIODE ISS133T-77 (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)	
C1328	I-126-096-11	ELECT 10 μ F 20% 25V (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)					
C1329	I-126-096-11	ELECT 10 μ F 20% 25V (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)					



REF NO.	PART NO.	DESCRIPTION	REMARK	REF NO.	PART NO.	DESCRIPTION	REMARK
D1320	8-719-991-33	DIODE ISS133T-77 (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)		R1309	I-216-073-00	METAL GLAZE	10K 5% 1/10W
D1321	8-719-991-33	DIODE ISS133T-77 (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)		R1310	I-216-073-00	METAL GLAZE	10K 5% 1/10W
D1322	8-719-923-74	DIODE MTZJ-T-77-11A (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)		R1311	I-214-702-00	METAL	75 1% 1/4W
D1324	8-719-991-33	DIODE ISS133T-77 (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)		R1312	I-216-065-00	METAL GLAZE	4.7K 5% 1/10W
D1325	8-719-991-33	DIODE ISS133T-77 (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)		R1317	I-216-214-00	METAL GLAZE	4.7K 5% 1/8W
D1326	8-719-991-33	DIODE ISS133T-77 (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)		R1318	I-216-268-00	METAL GLAZE	820K 5% 1/8W
D1327	8-719-991-33	DIODE ISS133T-77 (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)		R1319	I-216-256-00	METAL GLAZE	270K 5% 1/8W
D1328	8-719-991-33	DIODE ISS133T-77 (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)		R1320	I-216-246-00	METAL GLAZE	100K 5% 1/8W
D1329	8-719-991-33	DIODE ISS133T-77 (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)		R1321	I-216-244-00	METAL GLAZE	82K 5% 1/8W
D1330	8-719-991-33	DIODE ISS133T-77 (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)		R1331	I-216-059-00	METAL GLAZE	2.7K 5% 1/10W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
D1331	8-719-991-33	DIODE ISS133T-77 (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)		R1332	I-216-073-00	METAL GLAZE	10K 5% 1/10W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
D1332	8-719-991-33	DIODE ISS133T-77 (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)		R1333	I-216-073-00	METAL GLAZE	10K 5% 1/10W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
D1333	8-719-991-33	DIODE ISS133T-77 (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U) < IC >		R1335	I-216-059-00	METAL GLAZE	2.7K 5% 1/10W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
IC1301	8-759-984-96	IC BA7604N < JACK >		R1336	I-216-073-00	METAL GLAZE	10K 5% 1/10W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
J1303	I-565-167-12	TERMINAL, S (WITH SW) 4P		R1337	I-216-073-00	METAL GLAZE	10K 5% 1/10W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
J1304	I-569-578-11	TERMINAL, S (WITH SW)		R1338	I-216-009-00	METAL GLAZE	22 5% 1/10W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
J1319	I-565-167-12	TERMINAL, S (WITH SW) 4P (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)		R1339	I-214-702-00	METAL	75 1% 1/4W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
		< TRANSISTOR >		R1340	I-216-059-00	METAL GLAZE	2.7K 5% 1/10W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
				R1341	I-216-073-00	METAL GLAZE	10K 5% 1/10W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
Q1302	8-729-119-78	TRANSISTOR 2SC2785-HFE		R1342	I-216-073-00	METAL GLAZE	10K 5% 1/10W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
Q1305	8-729-119-76	TRANSISTOR 2SA1175-HFE		R1343	I-216-009-00	METAL GLAZE	22 5% 1/10W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
Q1308	8-729-119-78	TRANSISTOR 2SC2785-HFE (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)		R1344	I-214-702-00	METAL	75 1% 1/4W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
Q1309	8-729-119-78	TRANSISTOR 2SC2785-HFE (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)		R1345	I-216-009-00	METAL GLAZE	22 5% 1/10W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
Q1310	8-729-119-78	TRANSISTOR 2SC2785-HFE (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)		R1346	I-214-702-00	METAL	75 1% 1/4W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
Q1311	8-729-119-76	TRANSISTOR 2SA1175-HFE (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)		R1347	I-216-214-00	METAL GLAZE	4.7K 5% 1/8W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
Q1312	8-729-119-78	TRANSISTOR 2SC2785-HFE (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)		R1348	I-216-268-00	METAL GLAZE	820K 5% 1/8W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
Q1313	8-729-119-78	TRANSISTOR 2SC2785-HFE (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)		R1349	I-216-256-00	METAL GLAZE	270K 5% 1/8W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
Q1314	8-729-119-76	TRANSISTOR 2SA1175-HFE (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)		R1350	I-216-246-00	METAL GLAZE	100K 5% 1/8W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
		< RESISTOR >		R1351	I-216-244-00	METAL GLAZE	82K 5% 1/8W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
R1303	I-216-009-00	METAL GLAZE	22 5% 1/10W	R1352	I-216-059-00	METAL GLAZE	2.7K 5% 1/10W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
R1304	I-214-702-00	METAL	75 1% 1/4W	R1355	I-216-049-91	METAL GLAZE	1K 5% 1/10W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
R1305	I-216-065-00	METAL GLAZE	4.7K 5% 1/10W	R1356	I-214-702-00	METAL	75 1% 1/4W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
R1307	I-214-702-00	METAL	75 1% 1/4W	R1358	I-247-791-91	CARBON	22 5% 1/4W
R1308	I-216-059-00	METAL GLAZE	2.7K 5% 1/10W	R1360	I-214-702-00	METAL	75 1% 1/4W (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)
				R1361	I-216-009-00	METAL GLAZE	22 5% 1/10W (PVM-14N1A, 14N1E, 14N1MDE, 14N1U, 20N1A, 20N1E, 20N1U)

Q **A**

REF NO.	PART NO.	DESCRIPTION	REMARK	REF NO.	PART NO.	DESCRIPTION	REMARK
R1361	I-247-791-91	CARBON 22 5% 1/4W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)			4-200-407-01	HOLDER, LED	
R1362	I-216-009-00	METAL GLAZE 22 5% 1/10W (EXCEPT SSM-14N1E, 14NIU, 20N1E, 20NIU)				<CAPACITOR>	
R1363	I-214-702-00	METAL 75 1% 1/4W (EXCEPT SSM-14N1E, 14NIU, 20N1E, 20NIU)		C001	I-163-009-11	CERAMIC CHIP 0.001μF 10% 50V	
R1364	I-216-065-00	METAL GLAZE 4.7K 5% 1/10W (EXCEPT SSM-14N1E, 14NIU, 20N1E, 20NIU)		C002	I-163-009-11	CERAMIC CHIP 0.001μF 10% 50V	
R1365	I-214-702-00	METAL 75 1% 1/4W (EXCEPT SSM-14N1E, 14NIU, 20N1E, 20NIU)		C003	I-163-009-11	CERAMIC CHIP 0.001μF 10% 50V	
R1366	I-216-065-00	METAL GLAZE 4.7K 5% 1/10W (EXCEPT SSM-14N1E, 14NIU, 20N1E, 20NIU)		C004	I-163-009-11	CERAMIC CHIP 0.001μF 10% 50V	
R1367	I-216-073-00	METAL GLAZE 10K 5% 1/10W (EXCEPT SSM-14N1E, 14NIU, 20N1E, 20NIU)		C006	I-163-009-11	CERAMIC CHIP 0.001μF 10% 50V (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)	
R1368	I-216-073-00	METAL GLAZE 10K 5% 1/10W (EXCEPT SSM-14N1E, 14NIU, 20N1E, 20NIU)		C007	I-163-009-11	CERAMIC CHIP 0.001μF 10% 50V	
R1369	I-216-073-00	METAL GLAZE 10K 5% 1/10W (EXCEPT SSM-14N1E, 14NIU, 20N1E, 20NIU)		C008	I-163-009-11	CERAMIC CHIP 0.001μF 10% 50V	
R1370	I-216-059-00	METAL GLAZE 2.7K 5% 1/10W (EXCEPT SSM-14N1E, 14NIU, 20N1E, 20NIU)		C010	I-101-004-00	CERAMIC 0.01μF 50V	
R1371	I-216-244-00	METAL GLAZE 82K 5% 1/8W (EXCEPT SSM-14N1E, 14NIU, 20N1E, 20NIU)		C011	I-163-097-00	CERAMIC CHIP 15PF 5% 50V	
R1372	I-216-246-00	METAL GLAZE 100K 5% 1/8W (EXCEPT SSM-14N1E, 14NIU, 20N1E, 20NIU)		C012	I-163-097-00	CERAMIC CHIP 15PF 5% 50V	
R1373	I-216-268-00	METAL GLAZE 820K 5% 1/8W (EXCEPT SSM-14N1E, 14NIU, 20N1E, 20NIU)		C013	I-163-235-11	CERAMIC CHIP 22PF 5% 50V	
R1374	I-216-256-00	METAL GLAZE 270K 5% 1/8W (EXCEPT SSM-14N1E, 14NIU, 20N1E, 20NIU)		C014	I-163-235-11	CERAMIC CHIP 22PF 5% 50V	
R1375	I-216-214-00	METAL GLAZE 4.7K 5% 1/8W (EXCEPT SSM-14N1E, 14NIU, 20N1E, 20NIU)		C017	I-164-232-11	CERAMIC CHIP 0.01μF 10% 50V	
R1376	I-216-073-00	METAL GLAZE 10K 5% 1/10W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)		C018	I-164-232-11	CERAMIC CHIP 0.01μF 10% 50V	
R1377	I-216-009-00	METAL GLAZE 22 5% 1/10W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)		C019	I-126-964-11	ELECT 10μF 20% 50V	

Serial No. 6000001 to 6000221 (PVM-14N1A) Serial No. 6000001 to 6003699 (PVM-14N1E) Serial No. 6000001 to 6003583 (PVM-14N1U) Serial No. 6000001 to 6000096 (PVM-14N2A) Serial No. 6000001 to 6002485 (PVM-14N2E) Serial No. 6000001 to 6002319 (PVM-14N2U) Serial No. 6000001 to 6002355 (SSM-14N1E) Serial No. 6000001 to 6002571 (SSM-14N1U) Serial No. 6000001 to 6000091 (PVM-20N1A) Serial No. 6000001 to 6000923 (PVM-20N1E) Serial No. 6000001 to 6001487 (PVM-20N1U) Serial No. 6000001 to 6000048 (PVM-20N2A) Serial No. 6000001 to 6000798 (PVM-20N2E) Serial No. 6000001 to 6000847 (PVM-20N2U) Serial No. 6000001 to 6001085 (SSM-20N1E) Serial No. 6000001 to 6000967 (SSM-20N1U)				C020	I-163-009-11	CERAMIC CHIP 0.001μF 10% 50V	
*A-1297-543-A A BOARD, COMPLETE (PVM-14N1A, 14N1E, 14N1U) ****				C021	I-164-232-11	CERAMIC CHIP 0.01μF 10% 50V	
*A-1297-544-A A BOARD, COMPLETE (PVM-20N1A, 20N1E, 20N1U) ****				C023	I-136-165-00	FILM 0.1μF 5% 50V	
*A-1297-545-A A BOARD, COMPLETE (PVM-20N2A, 20N2E, 20N2U) ****				C024	I-126-964-11	ELECT 47μF 20% 16V	
*A-1297-546-A A BOARD, COMPLETE (PVM-14N2A, 14N2E, 14N2U) ****				C025	I-163-117-00	CERAMIC CHIP 100PF 5% 50V	
*A-1297-547-A A BOARD, COMPLETE (SSM-20N1E, 20N1U) ****				C026	I-163-117-00	CERAMIC CHIP 100PF 5% 50V	
*A-1297-548-A A BOARD, COMPLETE (SSM-20N1U) ****				C027	I-163-117-00	CERAMIC CHIP 100PF 5% 50V	
*A-1297-549-A A BOARD, COMPLETE (SSM-20N2E) ****				C028	I-163-117-00	CERAMIC CHIP 100PF 5% 50V	
*A-1297-550-A A BOARD, COMPLETE (SSM-20N2U) ****				C101	I-126-233-11	ELECT 22μF 20% 25V	
*A-1297-551-A A BOARD, COMPLETE (SSM-20N2U) ****				C102	I-107-635-11	ELECT 4.7μF 20% 160V	
*****				C103	I-102-050-00	CERAMIC 0.01μF 99% 500V	
*****				C201	I-126-964-11	ELECT 10μF 20% 50V	
*****				C202	I-126-964-11	ELECT 10μF 20% 50V	
*****				C203	I-126-934-11	ELECT 220μF 20% 16V	
*****				C204	I-126-964-11	ELECT 10μF 20% 50V	
*****				C206	I-126-940-11	ELECT 330μF 20% 25V	
*****				C207	I-163-017-00	CERAMIC CHIP 0.0047μF 10% 50V	
*****				C304	I-164-232-11	CERAMIC CHIP 0.01μF 10% 50V	
*****				C305	I-164-232-11	CERAMIC CHIP 0.01μF 10% 50V	
*****				C306	I-164-232-11	CERAMIC CHIP 0.01μF 10% 50V	
*****				C307	I-126-964-11	ELECT 10μF 20% 50V	
*****				C308	I-163-809-11	CERAMIC CHIP 0.047μF 10% 25V	
*****				C309	I-164-232-11	CERAMIC CHIP 0.01μF 10% 50V	
*****				C310	I-164-232-11	CERAMIC CHIP 0.01μF 10% 50V	
*****				C311	I-164-232-11	CERAMIC CHIP 0.01μF 10% 50V	
*****				C312	I-126-964-11	ELECT 10μF 20% 50V	
*****				C313	I-136-169-00	FILM 0.22μF 5% 50V	
*****				C314	I-136-495-11	FILM 0.068μF 5% 50V	
*****				C315	I-164-232-11	CERAMIC CHIP 0.01μF 10% 50V	
*****				C316	I-126-111-11	ELECT 3.3μF 20% 50V	
*****				C317	I-136-495-11	FILM 0.068μF 5% 50V	
*****				C318	I-164-232-11	CERAMIC CHIP 0.01μF 10% 50V	
*****				C319	I-164-232-11	CERAMIC CHIP 0.01μF 10% 50V	
*****				C321	I-164-232-11	CERAMIC CHIP 0.01μF 10% 50V	
*****				C322	I-164-232-11	CERAMIC CHIP 0.01μF 10% 50V	
*****				C323	I-163-009-11	CERAMIC CHIP 0.001μF 10% 50V	
*****				C324	I-163-117-00	CERAMIC CHIP 100PF 5% 50V	
*****				C325	I-124-122-11	ELECT 100μF 20% 50V	
*****				C327	I-163-105-00	CERAMIC CHIP 33PF 5% 50V	
*****				C328	I-163-105-00	CERAMIC CHIP 33PF 5% 50V	

The components identified by shading and marked Δ are critical for safety.
Replace only with part number specified.

Les composants identifiés par une trame et une marque Δ sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

A

REF NO.	PART NO.	DESCRIPTION	REMARK	REF NO.	PART NO.	DESCRIPTION	REMARK
C351	I-126-964-11	ELECT	10 μ F 20% 50V	C453	I-136-175-00	FILM	0.68 μ F 5% 50V
C352	I-163-005-11	CERAMIC CHIP	470PF 10% 50V	C454	I-136-175-00	FILM	0.68 μ F 5% 50V
C353	I-163-005-11	CERAMIC CHIP	470PF 10% 50V	C500	I-123-024-21	ELECT	33 μ F 160V
C354	I-163-005-11	CERAMIC CHIP	470PF 10% 50V	\blacksquare C501 Δ		FILM	3% 2KV
C355	I-163-117-00	CERAMIC CHIP	100PF 5% 50V		(PVM-14N1A, 14N1E, 14N1U, 14N2A, 14N2E, 14N2U/ SSM-14N1E, 14N1U)		
C356	I-163-117-00	CERAMIC CHIP	100PF 5% 50V	\blacksquare C501 Δ		FILM	3% 2KV
C357	I-163-117-00	CERAMIC CHIP	100PF 5% 50V		(PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/ SSM-20N1E, 20N1U)		
C358	I-126-964-11	ELECT	10 μ F 20% 50V	\blacksquare C502 Δ		FILM	10% 630V
C359	I-164-232-11	CERAMIC CHIP	0.01 μ F 10% 50V		(PVM-14N1A, 14N1E, 14N1U, 14N2A, 14N2E, 14N2U/ SSM-14N1E, 14N1U)		
C360	I-163-113-00	CERAMIC CHIP	68PF 5% 50V	\blacksquare C502 Δ		FILM	5% 400V
C361	I-163-113-00	CERAMIC CHIP	68PF 5% 50V		(PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/ SSM-20N1E, 20N1U)		
C362	I-163-113-00	CERAMIC CHIP	68PF 5% 50V	\blacksquare C503 Δ		CERAMIC	10% 2KV
C363	I-163-101-00	CERAMIC CHIP	22PF 5% 50V	\blacksquare C504 Δ		CERAMIC	10% 2KV
C364	I-163-101-00	CERAMIC CHIP	22PF 5% 50V	C505	I-130-489-00	FILM	0.033 μ F 5% 50V
C365	I-163-101-00	CERAMIC CHIP	22PF 5% 50V	C506	I-136-541-11	FILM	1.5 μ F 5% 200V
C367	I-163-007-11	CERAMIC CHIP	680PF 10% 50V	C507	I-136-113-00	FILM	2 μ F 5% 200V
C368	I-102-121-00	CERAMIC	0.0022 μ F 10% 50V (PVM-14N1A, 14N1E, 14N1U, 14N2A, 14N2E, 14N2U/ SSM-14N1E, 14N1U)	C508	I-102-228-00	CERAMIC	470PF 10% 500V
C369	I-102-121-00	CERAMIC	0.0022 μ F 10% 50V (PVM-14N1A, 14N1E, 14N1U, 14N2A, 14N2E, 14N2U/ SSM-14N1E, 14N1U)	C509	I-126-772-11	ELECT	1 μ F 20% 250V
C370	I-102-824-00	CERAMIC	470PF 5% 50V (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/ SSM-20N1E, 20N1U)	C510	I-136-103-00	FILM	0.1 μ F 5% 200V (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
C370	I-102-824-00	CERAMIC	470PF 5% 50V (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/ SSM-20N1E, 20N1U)	C511	I-106-371-00	MYLAR	0.015 μ F 99% 200V
C370	I-102-824-00	CERAMIC	470PF 5% 50V (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/ SSM-20N1E, 20N1U)	C512	I-102-228-00	CERAMIC	470PF 10% 500V
C369	I-102-824-00	CERAMIC	470PF 5% 50V (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/ SSM-20N1E, 20N1U)	C514	I-107-924-11	ELECT	0.47 μ F 20% 50V
C370	I-102-121-00	CERAMIC	0.0022 μ F 10% 50V (PVM-14N1A, 14N1E, 14N1U, 14N2A, 14N2E, 14N2U/ SSM-14N1E, 14N1U)	C516	I-126-941-11	ELECT	470 μ F 20% 25V
C370	I-102-121-00	CERAMIC	0.0022 μ F 10% 50V (PVM-14N1A, 14N1E, 14N1U, 14N2A, 14N2E, 14N2U/ SSM-14N1E, 14N1U)	C518	I-126-941-11	ELECT	470 μ F 20% 25V
C370	I-102-824-00	CERAMIC	470PF 5% 50V (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/ SSM-20N1E, 20N1U)	C522	I-107-638-11	ELECT	33 μ F 20% 160V
C370	I-102-824-00	CERAMIC	470PF 5% 50V (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/ SSM-20N1E, 20N1U)	C523	I-162-114-00	CERAMIC	0.0047 μ F 2KV
C371	I-101-004-00	CERAMIC	0.01 μ F 50V	C551	I-104-788-11	ELECT	100 μ F 20% 35V
C372	I-124-667-11	ELECT	10 μ F 20% 50V	C552	I-137-401-11	FILM	0.22 μ F 10% 100V
C373	I-124-667-11	ELECT	10 μ F 20% 50V	C553	I-124-927-11	ELECT	4.7 μ F 20% 50V
C402	I-126-964-11	ELECT	10 μ F 20% 50V (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)	C554	I-163-009-11	CERAMIC CHIP	0.001 μ F 10% 50V
C403	I-136-155-00	FILM	0.015 μ F 5% 50V	C555	I-124-667-11	ELECT	10 μ F 20% 50V
C404	I-136-155-00	FILM	0.015 μ F 5% 50V	C556	I-124-667-11	ELECT	10 μ F 20% 50V
C405	I-136-155-00	FILM	0.015 μ F 5% 50V	\blacksquare C501 Δ	I-107-564-11	FILM	0.22 μ F 20% 300V
C407	I-126-964-11	ELECT	10 μ F 20% 50V (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)	\blacksquare C602 Δ	I-107-564-11	FILM	0.22 μ F 20% 300V
C409	I-126-964-11	ELECT	10 μ F 20% 50V (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)	C603 Δ	I-161-953-51	CERAMIC	0.0047 μ F 20% 400V
C404	I-136-155-00	FILM	0.015 μ F 5% 50V	C604 Δ	I-161-953-51	CERAMIC	0.0047 μ F 20% 400V
C405	I-136-155-00	FILM	0.015 μ F 5% 50V	\blacksquare C605 Δ	I-161-953-51	CERAMIC	0.0047 μ F 20% 400V
C407	I-126-964-11	ELECT	10 μ F 20% 50V (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)	\blacksquare C606 Δ	I-161-953-51	CERAMIC	0.0047 μ F 20% 400V
C409	I-126-964-11	ELECT	10 μ F 20% 50V (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)	C607	I-113-608-11	ELECT(SOLID)	470 μ F 20% 400V
C410	I-164-232-11	CERAMIC CHIP	0.01 μ F 10% 50V (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)	C609	I-136-064-00	FILM	0.002 μ F 3% 2KV
C411	I-164-232-11	CERAMIC CHIP	0.01 μ F 10% 50V (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)	C610	I-126-970-11	ELECT	330 μ F 20% 50V
C412	I-126-964-11	ELECT	10 μ F 20% 50V (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)	C611	I-164-161-11	CERAMIC CHIP	0.0022 μ F 10% 50V
C413	I-136-175-00	FILM	0.68 μ F 5% 50V (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)	C612	I-126-969-11	ELECT	220 μ F 20% 50V
C414	I-163-121-00	CERAMIC CHIP	150PF 5% 50V (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)	C613	I-137-484-11	FILM	0.47 μ F 10% 630V
C415	I-164-232-11	CERAMIC CHIP	0.01 μ F 10% 50V	\blacksquare C615 Δ	I-107-564-11	FILM	0.22 μ F 20% 300V
C416	I-164-232-11	CERAMIC CHIP	0.01 μ F 10% 50V	\blacksquare C616 Δ	I-162-577-81	CERAMIC	0.0022 μ F 20% 400V
C417	I-164-232-11	CERAMIC CHIP	0.01 μ F 10% 50V	\blacksquare C617 Δ	I-162-577-81	CERAMIC	0.0022 μ F 20% 400V
C413	I-136-175-00	FILM	0.68 μ F 5% 50V (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)	\blacksquare C618 Δ	I-162-577-81	CERAMIC	0.0022 μ F 20% 400V
C414	I-163-121-00	CERAMIC CHIP	150PF 5% 50V (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)	\blacksquare C619 Δ	I-162-577-81	CERAMIC	0.0022 μ F 20% 400V
C415	I-164-232-11	CERAMIC CHIP	0.01 μ F 10% 50V	C651	I-125-494-11	ELECT(BLOCK)	560 μ F 20% 160V
C416	I-164-232-11	CERAMIC CHIP	0.01 μ F 10% 50V	C653	I-107-891-11	ELECT	3300 μ F 20% 50V
C417	I-164-232-11	CERAMIC CHIP	0.01 μ F 10% 50V	C654	I-107-364-11	FILM	0.01 μ F 10% 200V
C414	I-163-121-00	CERAMIC CHIP	150PF 5% 50V (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)	C655	I-126-964-11	ELECT	10 μ F 20% 50V
C415	I-164-232-11	CERAMIC CHIP	0.01 μ F 10% 50V	C656	I-124-667-11	ELECT	10 μ F 20% 50V
C416	I-164-232-11	CERAMIC CHIP	0.01 μ F 10% 50V	C671	I-124-667-11	ELECT	10 μ F 20% 50V

A

The components identified by shading and marked **Δ** are critical for safety.
Replace only with part number specified.

Les composants identifiés par une trame et une marque **Δ** sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

REF NO.	PART NO.	DESCRIPTION	REMARK	REF NO.	PART NO.	DESCRIPTION	REMARK				
< CONNECTOR >											
CN052	*1-564-508-11	PLUG, CONNECTOR 5P		FB001	1-410-397-21	FERRITE BEAD INDUCTOR	1.1μH				
CN053	1-766-922-11	CONNECTOR, BOARD TO BOARD 18P		FB301	1-410-397-21	FERRITE BEAD INDUCTOR	1.1μH				
CN201	*1-564-506-11	PLUG, CONNECTOR 3P		FB601	1-410-396-41	FERRITE BEAD INDUCTOR	0.45μH				
CN351	*1-564-509-11	PLUG, CONNECTOR 6P		FB602	1-410-396-41	FERRITE BEAD INDUCTOR	0.45μH				
CN401	*1-564-509-11	PLUG, CONNECTOR 6P		FB603	1-410-396-41	FERRITE BEAD INDUCTOR	0.45μH				
CN402	*1-564-510-11	PLUG, CONNECTOR 7P (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)		< FILTER >							
CN501	*1-580-798-11	CONNECTOR PIN (DY) 6P		FL301	1-233-462-11	FILTER, LOW PASS					
CN502	*1-508-768-00	PIN, CONNECTOR (5MM PITCH) 6P		FL302	1-233-462-11	FILTER, LOW PASS					
CN601	*1-580-843-11	PIN, CONNECTOR (POWER)		< IC >							
CN602	*1-508-765-00	PIN, CONNECTOR (5MM PITCH) 3P		IC001	8-752-872-61	IC CXP85220A-027S					
CN603	1-508-786-00	PIN, CONNECTOR (5MM PITCH) 2P		1-540-044-11	SOCKET, IC; IC001						
< DIODE >											
D001	8-719-991-33	DIODE 1SS133T-77		IC002	8-759-370-33	IC ST24C04FB6					
D002	8-719-991-33	DIODE 1SS133T-77		IC003	8-759-279-41	IC MM1096BD					
D101	8-719-991-33	DIODE 1SS133T-77		IC201	8-759-324-57	IC TDA7052A					
D102	8-719-983-38	DIODE MTZJ-T-77-36B		IC301	8-759-324-58	IC VDP3108					
D103	8-719-302-43	DIODE EL1Z		IC401	8-759-000-48	IC MC14052BCP (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)					
D201	8-719-947-26	DIODE MTZJ-T-72-6.2C		IC402	8-759-046-77	IC BA7602 (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)					
D301	8-719-991-33	DIODE 1SS133T-77		IC551	8-759-192-71	IC STV9379					
D302	8-719-991-33	DIODE 1SS133T-77		4-201-023-01	SPACER, INSULATING; IC551						
D303	8-719-991-33	DIODE 1SS133T-77		4-202-373-01	SPRING, IC; IC551						
D304	8-719-914-43	DIODE DAN202K-T-146		IC552	8-759-145-58	ICμPC4558C					
D501	8-719-945-80	DIODE ERC06-15S		IC601	8-749-010-84	IC STR-S6708					
D502	8-719-979-85	DIODE EGP20G		4-382-854-11	SCREW (M3X10), P, SW (+); IC601						
D503	8-719-908-03	DIODE GP08D		IC651	8-749-921-89	IC SE115N					
D504	8-719-908-03	DIODE GP08D		IC652	8-759-231-53	IC TA7805S					
D505	8-719-109-85	DIODE RD5.1ESB2		IC653	8-759-231-53	IC TA7805S					
D506	8-719-302-43	DIODE EL1Z		IC654	8-759-701-59	IC NJM78M09FA					
D507	8-719-302-43	DIODE EL1Z		4-382-854-11	SCREW (M3X10), P, SW (+); IC654						
D508	8-719-302-43	DIODE EL1Z		< CHIP CONDUCTOR >							
D509	8-719-028-72	DIODE RGP02-17EL-6433		JR1	1-216-295-91	CONDUCTOR, CHIP(2012)					
D551	8-719-908-03	DIODE GP08D		JR2	1-216-295-91	CONDUCTOR, CHIP(2012)					
D552	8-719-109-85	DIODE RD5.1ESB2		JR3	1-216-295-91	CONDUCTOR, CHIP(2012)					
D601	8-719-025-18	DIODE GBU41L-6088		JR4	1-216-295-91	CONDUCTOR, CHIP(2012)					
			4-382-854-11	JR5	1-216-295-91	CONDUCTOR, CHIP(2012)					
D605	8-719-302-43	DIODE EL1Z		JR6	1-216-295-91	CONDUCTOR, CHIP(2012)					
D606	8-719-921-63	DIODE MTZJ-7.5B		JR7	1-216-295-91	CONDUCTOR, CHIP(2012)					
D607	8-719-302-43	DIODE EL1Z		JR8	1-216-295-91	CONDUCTOR, CHIP(2012)					
D609	8-719-302-43	DIODE EL1Z		JR9	1-216-295-91	CONDUCTOR, CHIP(2012)					
D610	8-719-302-43	DIODE EL1Z		JR10	1-216-295-91	CONDUCTOR, CHIP(2012)					
D611	8-719-991-33	DIODE 1SS133T-77		JR11	1-216-295-91	CONDUCTOR, CHIP(2012)					
D651	8-719-301-64	DIODE RU4DS		JR12	1-216-295-91	CONDUCTOR, CHIP(2012)					
D653	8-719-045-48	DIODE FML-G12S		JR13	1-216-295-91	CONDUCTOR, CHIP(2012)					
D656	8-719-046-66	DIODE SLR-56MC3F (POWER)		JR14	1-216-295-91	CONDUCTOR, CHIP(2012)					
< FUSE >											
F601	Δ 1-532-746-11	FUSE, GLASS TUBE (4A/125V) (PVM-14N1U, 14N2U, 20N1U, 20N2U/ SSM-14N1E, 20N1U)		JR124	1-216-295-91	CONDUCTOR, CHIP(2012)					
F601	Δ 1-576-226-21	FUSE (H.B.C. 14A/250V) (PVM-14N1A, 14N1E, 14N2A, 14N2E, 20N1A, 20N1E, 20N2A, 20N2E/SSM-14N1E, 20N1E)		JR125	1-216-295-91	CONDUCTOR, CHIP(2012)					
			1-533-223-11	JR451	1-216-295-91	CONDUCTOR, CHIP (2012)					
< COIL >											
F651	Δ 1-532-595-00	FUSE, GLASS TUBE (3.15A/125V)		L001	1-408-418-00	INDUCTOR 56μH					
	1-533-233-11	HOLDER, FUSE; F651		L101	1-421-465-00	COIL, FERRITE CHOKE 68μH					
				L501	1-421-465-00	COIL, FERRITE CHOKE 68μH					

A

REF NO.	PART NO.	DESCRIPTION	REMARK	REF NO.	PART NO.	DESCRIPTION	REMARK
L502	1-459-105-21	COIL(WITH CORE)		R015	1-216-065-00	METAL GLAZE	4.7K 5% 1/10W
L503	1-412-553-11	INDUCTOR 3.3mmH		R016	1-216-073-00	METAL GLAZE	10K 5% 1/10W
L504	1-459-104-00	COIL, WITH CORE		R017	1-216-073-00	METAL GLAZE	10K 5% 1/10W
L505	1-459-760-13	COIL, HORIZONTAL LINEARITY (PVM-14N1A, 14N1E, 14N1U, 14N2A, 14N2E, 14N2U/ SSM-14N1E, 14N1U)		R022	1-216-073-00	METAL GLAZE	10K 5% 1/10W
L505	1-459-769-13	COIL, HORIZONTAL LINEARITY (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/ SSM-20N1E, 20N1U)		R023	1-216-025-91	METAL GLAZE	100 5% 1/10W
L505	1-459-769-13	COIL, HORIZONTAL LINEARITY (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/ SSM-20N1E, 20N1U)		R024	1-216-025-91	METAL GLAZE	100 5% 1/10W
L510	1-407-365-00	COIL,CHOKE		R027	1-216-073-00	METAL GLAZE	10K 5% 1/10W
L551	1-459-104-00	COIL, WITH CORE		R028	1-216-073-00	METAL GLAZE	10K 5% 1/10W
L601	1-411-541-11	COIL, CHOKE 7.2mmH < PHOTO COUPLER >		R029	1-216-073-00	METAL GLAZE	10K 5% 1/10W
PH601	8-749-923-50	PHOTO COUPLER PC111YS < TRANSISTOR >		R035	1-216-073-00	METAL GLAZE	10K 5% 1/10W
Q004	8-729-119-78	TRANSISTOR 2SC2785-HFE		R036	1-216-073-00	METAL GLAZE	10K 5% 1/10W
Q005	8-729-119-78	TRANSISTOR 2SC2785-HFE		R053	1-216-065-00	METAL GLAZE	4.7K 5% 1/10W
Q101	8-729-200-17	TRANSISTOR 2SA1091-O		R054	1-216-065-00	METAL GLAZE	4.7K 5% 1/10W
Q102	8-729-119-78	TRANSISTOR 2SC2785-HFE		R055	1-216-025-91	METAL GLAZE	100 5% 1/10W
Q201	8-729-019-01	TRANSISTOR 2SD2394-EF		R056	1-216-025-91	METAL GLAZE	100 5% 1/10W
Q301	8-729-119-76	TRANSISTOR 2SA1175-HFE		R057	1-216-073-00	METAL GLAZE	10K 5% 1/10W
Q302	8-729-119-76	TRANSISTOR 2SA1175-HFE		R058	1-216-073-00	METAL GLAZE	10K 5% 1/10W
Q351	8-729-119-78	TRANSISTOR 2SC2785-HFE		R059	1-216-073-00	METAL GLAZE	10K 5% 1/10W
Q352	8-729-119-76	TRANSISTOR 2SA1175-HFE		R101	1-216-391-11	METAL OXIDE	1.5 5% 3W F (PVM-14N1A, 14N1E, 14N1U, 14N2A, 14N2E, 14N2U/ SSM-14N1E, 14N1U)
Q353	8-729-119-78	TRANSISTOR 2SC2785-HFE		R101	1-216-390-11	METAL OXIDE	1.2 5% 3W F (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)
Q354	8-729-119-78	TRANSISTOR 2SC2785-HFE		R102	1-216-667-11	METAL CHIP	4.7K 0.50% 1/10W
Q355	8-729-119-78	TRANSISTOR 2SC2785-HFE		R103	1-216-115-00	METAL GLAZE	560K 5% 1/10W
Q356	8-729-119-76	TRANSISTOR 2SA1175-HFE		R104	1-218-754-11	METAL CHIP	120K 0.50% 1/10W
Q357	8-729-119-78	TRANSISTOR 2SC2785-HFE		R105	1-218-756-11	METAL CHIP	150K 0.50% 1/10W
Q358	8-729-119-78	TRANSISTOR 2SC2785-HFE		R106	1-216-097-91	METAL GLAZE	100K 5% 1/10W
Q359	8-729-119-78	TRANSISTOR 2SC2785-HFE		R107	1-216-097-91	METAL GLAZE	100K 5% 1/10W
Q360	8-729-119-76	TRANSISTOR 2SA1175-HFE		R108	1-208-814-11	METAL CHIP	22K 0.5% 1/10W (PVM-14N1A, 14N1E, 14N1U, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14N1U)
Q361	8-729-119-78	TRANSISTOR 2SC2785-HFE		R108	1-216-682-11	METAL CHIP	20K 0.50% 1/10W (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)
Q362	8-729-119-78	TRANSISTOR 2SC2785-HFE		R110	1-208-824-11	METAL CHIP	56K 0.50% 1/10W (PVM-14N1A, 14N1E, 14N1U, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14N1U)
Q501	8-729-810-49	TRANSISTOR 2SD1877S-SONY-CA (PVM-14N1A, 14N1E, 14N1U, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14N1U)		R110	1-216-695-11	METAL CHIP	68K 0.5% 1/10W (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)
Q501	8-729-821-87	TRANSISTOR 2SD1878-CA (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)		R112	1-216-073-00	METAL GLAZE	10K 5% 1/10W
	4-382-854-11	SCREW (M3X10), P, SW (+); Q501		R201	1-216-093-00	METAL GLAZE	68K 5% 1/10W
Q502	8-729-140-96	TRANSISTOR 2SD774-34		R202	1-216-069-00	METAL GLAZE	6.8K 5% 1/10W
Q551	8-729-019-01	TRANSISTOR 2SD2394-EF		R203	1-216-049-91	METAL GLAZE	1K 5% 1/10W
	4-201-023-01	SPACER, INSULATING; Q551		R204	1-215-907-11	METAL OXIDE	22 5% 3W F
	4-202-373-01	SPRING, IC; Q551		R205	1-216-056-00	METAL GLAZE	2K 5% 1/10W
Q601	8-729-025-04	TRANSISTOR 2SC3852A < RESISTOR >		R207	1-216-055-00	METAL GLAZE	1.8K 5% 1/10W
R001	1-216-073-00	METAL GLAZE	10K 5% 1/10W	R208	1-216-065-00	METAL GLAZE	4.7K 5% 1/10W
R002	1-216-073-00	METAL GLAZE	10K 5% 1/10W	R209	1-216-057-00	METAL GLAZE	2.2K 5% 1/10W
R003	1-216-073-00	METAL GLAZE	10K 5% 1/10W	R301	1-216-025-91	METAL GLAZE	100 5% 1/10W
R004	1-216-073-00	METAL GLAZE	10K 5% 1/10W	R302	1-216-025-91	METAL GLAZE	100 5% 1/10W
R005	1-216-073-00	METAL GLAZE	10K 5% 1/10W	R303	1-216-055-00	METAL GLAZE	1.8K 5% 1/10W
R007	1-216-073-00	METAL GLAZE	10K 5% 1/10W	R304	1-202-826-00	SOLID	4.7K 10% 1/2W
R012	1-216-025-91	METAL GLAZE	100 5% 1/10W	R305	1-216-065-00	METAL GLAZE	4.7K 5% 1/10W
R013	1-216-025-91	METAL GLAZE	100 5% 1/10W	R306	1-216-081-00	METAL GLAZE	22K 5% 1/10W
R014	1-216-065-00	METAL GLAZE	4.7K 5% 1/10W	R307	1-216-073-00	METAL GLAZE	10K 5% 1/10W
				R308	1-216-001-00	METAL GLAZE	10 5% 1/10W

A

The components identified by shading and marked **△** are critical for safety.
Replace only with part number specified.

Les composants identifiés par une trame et une marque **△** sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

REF NO.	PART NO.	DESCRIPTION	REMARK	REF NO.	PART NO.	DESCRIPTION	REMARK				
R311	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W	R402	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R312	1-216-295-91	CONDUCTOR, CHIP(2012)				R501	1-216-025-91	METAL GLAZE	100	5%	1/10W
R313	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W	R502	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R315	1-216-085-00	METAL GLAZE	33K	5%	1/10W	R503	1-215-895-11	METAL OXIDE	3.3K	5%	2W
R316	1-216-043-91	METAL GLAZE	560	5%	1/10W			(PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)			
R318	1-216-073-00	METAL GLAZE	10K	5%	1/10W	R503	1-215-896-00	METAL OXIDE	4.7K	5%	2W
R319	1-216-049-91	METAL GLAZE	1K	5%	1/10W			(PVM-14N1A, 14N1E, 14N1U, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14N1U)			
R320	1-216-049-91	METAL GLAZE	1K	5%	1/10W	R506	1-260-326-11	CARBON	680	5%	1/2W
R321	1-216-049-91	METAL GLAZE	1K	5%	1/10W	R507	1-215-864-00	METAL OXIDE	150	5%	1W
R322	1-216-049-91	METAL GLAZE	1K	5%	1/10W	R508	1-215-859-11	METAL OXIDE	22	5%	2W
R323	1-216-049-91	METAL GLAZE	1K	5%	1/10W			(PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)			
R324	1-216-049-91	METAL GLAZE	1K	5%	1/10W	R508	1-216-423-11	METAL OXIDE	27	5%	1W
R325	1-216-049-91	METAL GLAZE	1K	5%	1/10W			(PVM-14N1A, 14N1E, 14N1U, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14N1U)			
R351	1-216-041-00	METAL GLAZE	470	5%	1/10W	R509	1-216-049-91	METAL GLAZE	1K	5%	1/10W
						R513	1-247-887-00	CARBON	220K	5%	1/4W
R352	1-216-067-00	METAL GLAZE	5.6K	5%	1/10W	R514	1-249-419-11	METAL OXIDE	1.5K	5%	1/4W
						R551	1-216-429-00	METAL OXIDE	270	5%	1W
						R552	1-216-349-00	METAL OXIDE	1	5%	1W
R353	1-216-043-91	METAL GLAZE	560	5%	1/10W	R553	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R354	1-216-055-00	METAL GLAZE	1.8K	5%	1/10W	R554	1-216-079-00	METAL GLAZE	18K	5%	1/10W
R355	1-216-049-91	METAL GLAZE	1K	5%	1/10W	R555	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R357	1-216-035-00	METAL GLAZE	270	5%	1/10W	R556	1-216-351-00	METAL OXIDE	1.5	5%	1W
R358	1-216-001-00	METAL GLAZE	10	5%	1/10W	R557	1-216-053-00	METAL GLAZE	1.5K	5%	1/10W
R360	1-216-067-00	METAL GLAZE	5.6K	5%	1/10W	R558	1-216-031-00	METAL GLAZE	180	5%	1/10W
						R559	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R361	1-216-041-00	METAL GLAZE	470	5%	1/10W	R560	1-216-689-11	METAL GLAZE	39K	5%	1/10W
						R561	1-249-392-11	CARBON	8.2	5%	1/4W
						R562	1-216-295-91	CONDUCTOR, CHIP(2012)			
R361	1-216-045-00	METAL GLAZE	680	5%	1/10W	R564	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
						R565	1-216-049-91	METAL GLAZE	1K	5%	1/10W
						R566	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R362	1-216-043-91	METAL GLAZE	560	5%	1/10W	R570	1-216-422-11	METAL OXIDE	18	5%	1W
R363	1-216-055-00	METAL GLAZE	1.8K	5%	1/10W			(PVM-14N1A, 14N1E, 14N1U, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14N1U)			
R364	1-216-049-91	METAL GLAZE	1K	5%	1/10W	R570	1-216-423-11	METAL OXIDE	27	5%	1W
R366	1-216-035-00	METAL GLAZE	270	5%	1/10W			(PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)			
R367	1-216-001-00	METAL GLAZE	10	5%	1/10W	R601	▲ 1-202-885-91	SOLID	1M	20%	1/2W
R369	1-216-067-00	METAL GLAZE	5.6K	5%	1/10W	R602	1-216-490-11	METAL OXIDE	39K	5%	3W
						R604	1-215-877-11	METAL OXIDE	22K	5%	1W
R370	1-216-041-00	METAL GLAZE	470	5%	1/10W	R605	1-215-869-11	METAL OXIDE	1K	5%	1W
						R606	1-249-421-11	CARBON	2.2K	5%	1/4W
R370	1-216-045-00	METAL GLAZE	680	5%	1/10W	R607	1-249-417-11	CARBON	1K	5%	1/4W
						R608	1-217-241-00	WIREWOUND	0.22	10%	3W
R371	1-216-043-91	METAL GLAZE	560	5%	1/10W	R609	1-247-807-31	CARBON	100	5%	1/4W
R372	1-216-055-00	METAL GLAZE	1.8K	5%	1/10W	R610	1-216-470-00	METAL OXIDE	18	5%	3W
R373	1-216-049-91	METAL GLAZE	1K	5%	1/10W	R611	1-249-417-11	CARBON	1K	5%	1/4W
R375	1-216-035-00	METAL GLAZE	270	5%	1/10W	R612	▲ 1-205-998-11	WIREWOUND	1	5%	10W
R376	1-216-001-00	METAL GLAZE	10	5%	1/10W	R613	1-249-426-11	CARBON	5.6K	5%	1/4W
R378	1-216-001-00	METAL GLAZE	10	5%	1/10W	R614	▲ 1-202-725-91	SOLID	3.3M	10%	1/2W
R379	1-216-001-00	METAL GLAZE	10	5%	1/10W	R615	▲ 1-202-725-91	SOLID	3.3M	10%	1/2W
R380	1-216-001-00	METAL GLAZE	10	5%	1/10W	R616	▲ 1-205-998-11	WIREWOUND	1	5%	10W
R401	1-216-041-00	METAL GLAZE	470	5%	1/10W	R622	1-249-424-11	CARBON	3.9K	5%	1/4W
						R623	1-216-490-11	METAL OXIDE	39K	5%	3W
						R657	1-249-417-11	CARBON	1K	5%	1/4W

The components identified by shading and marked Δ are critical for safety.
Replace only with part number specified.

Les composants identifiés par une trame et une marque Δ sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

A

REF NO.	PART NO.	DESCRIPTION	REMARK			REF NO.	PART NO.	DESCRIPTION	REMARK
R604	1-215-877-11	METAL OXIDE	22K	5%	1W	F		Serial No. 6000222 and Higher (PVM-14N1A)	
R605	1-215-869-11	METAL OXIDE	1K	5%	1W	F		Serial No. 6003700 and Higher (PVM-14N1E)	
R606	1-249-421-11	CARBON	2.2K	5%	1/4W			Serial No. 6000001 and Higher (PVM-14N1MDE)	
R607	1-249-417-11	CARBON	1K	5%	1/4W			Serial No. 6003584 and Higher (PVM-14N1U)	
R608	1-217-241-00	WIREWOUND	0.22	10%	3W	F		Serial No. 6000097 and Higher (PVM-14N2A)	
R609	1-247-807-31	CARBON	100	5%	1/4W			Serial No. 6002486 and Higher (PVM-14N2E)	
R610	1-216-470-00	METAL OXIDE	18	5%	3W	F		Serial No. 6002320 and Higher (PVM-14N2U)	
R611	1-249-417-11	CARBON	1K	5%	1/4W			Serial No. 6002356 and Higher (SSM-14N1E)	
R612 Δ	1-205-998-11	WIREWOUND	1	5%	10W			Serial No. 6002572 and Higher (SSM-14N1U)	
R613	1-249-426-11	CARBON	5.6K	5%	1/4W			Serial No. 6000092 and Higher (PVM-20N1A)	
R614 Δ	1-202-725-91	SOLID	3.3M	10%	1/2W			Serial No. 6000924 and Higher (PVM-20N1E)	
R615 Δ	1-202-725-91	SOLID	3.3M	10%	1/2W			Serial No. 6001488 and Higher (PVM-20N1U)	
R616 Δ	1-205-998-11	WIREWOUND	1	5%	10W			Serial No. 6000049 and Higher (PVM-20N2A)	
R622	1-249-424-11	CARBON	3.9K	5%	1/4W			Serial No. 6000799 and Higher (PVM-20N2E)	
R623	1-216-490-11	METAL OXIDE	39K	5%	3W	F		Serial No. 6000848 and Higher (PVM-20N2U)	
R657	1-249-417-11	CARBON	1K	5%	1/4W			Serial No. 6001086 and Higher (SSM-20N1E)	
R658	1-212-954-11	FUSIBLE	6.8	5%	1/2W	F		Serial No. 6000968 and Higher (SSM-20N1U)	
R1201	1-215-907-11	METAL OXIDE	22	5%	3W	F			
< SWITCH >									
S001	1-571-532-21	SWITCH, TACTIL					*A-1297-543-B	A BOARD, COMPLETE (PVM-14N1A, 14N1E, 14N1U) *****	
S002	1-571-532-21	SWITCH, TACTIL					*A-1297-544-B	A BOARD, COMPLETE (PVM-20N1A, 20N1E, 20N1U) *****	
S003	1-571-532-21	SWITCH, TACTIL					*A-1297-545-B	A BOARD, COMPLETE (PVM-20N2A, 20N2E, 20N2U) *****	
S004	1-571-532-21	SWITCH, TACTIL					*A-1297-546-B	A BOARD, COMPLETE (PVM-14N2A, 14N2E, 14N2U) *****	
S006	1-571-532-21	SWITCH, TACTIL (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)					*A-1297-592-B	A BOARD, COMPLETE (SSM-20N1E, 20N1U) *****	
S007	1-571-532-21	SWITCH, TACTIL					*A-1297-593-B	A BOARD, COMPLETE (SSM-14N1E, 14N1U) *****	
S008	1-571-532-21	SWITCH, TACTIL					*A-1298-039-A	A BOARD, COMPLETE (PVM-14N1MDE) *****	
S501	1-554-186-00	SWITCH, LEVER							
S601 Δ	1-571-433-21	SWITCH, PUSH (AC POWER) (POWER)							
< SPARK GAP >									
SG501	1-519-422-11	GAP, SPARK							
< TRANSFORMER >									
T501 Δ	1-453-201-11	TRANSFORMER ASSY, FLYBACK (NX-2610) (PVM-14N1A, 14N1E, 14N1U, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14N1U)							
T501 Δ	1-453-202-11	TRANSFORMER ASSY, FLYBACK (NX-2611) (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)							
T502	1-437-090-31	HDT							
T601 Δ	1-429-265-11	TRANSFORMER, CONVERTER (SKT)							
T603 Δ	1-429-482-11	TRANSFORMER, LINE FILTER (LFT)							
< THERMISTOR >									
THP601 Δ	1-808-059-32	THERMISTOR, POSITIVE							
< CRYSTAL >									
X001	1-567-781-11	VIBRATOR, CRYSTAL (4MHz)							
X301	1-760-878-11	VIBRATOR, CRYSTAL (20.25MHz)							

< CAPACITOR >									
C001	1-163-009-11	CERAMIC CHIP	0.001 μ F	10%	50V				
C002	1-163-009-11	CERAMIC CHIP	0.001 μ F	10%	50V				
C003	1-163-009-11	CERAMIC CHIP	0.001 μ F	10%	50V				
C004	1-163-009-11	CERAMIC CHIP	0.001 μ F	10%	50V				
C006	1-163-009-11	CERAMIC CHIP	0.001 μ F	10%	50V (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)				
C007	1-163-009-11	CERAMIC CHIP	0.001 μ F	10%	50V				
C008	1-163-009-11	CERAMIC CHIP	0.001 μ F	10%	50V				
C010	1-101-004-00	CERAMIC	0.01 μ F		50V				
C011	1-163-231-11	CERAMIC CHIP	15PF	5%	50V				
C012	1-163-231-11	CERAMIC CHIP	15PF	5%	50V				
C013	1-163-235-11	CERAMIC CHIP	22PF	5%	50V				
C014	1-163-235-11	CERAMIC CHIP	22PF	5%	50V				
C017	1-164-232-11	CERAMIC CHIP	0.01 μ F	10%	50V				
C018	1-164-232-11	CERAMIC CHIP	0.01 μ F	10%	50V				
C019	1-126-964-11	ELECT	10 μ F	20%	50V				
C020	1-163-009-11	CERAMIC CHIP	0.001 μ F	10%	50V				
C021	1-164-232-11	CERAMIC CHIP	0.01 μ F	10%	50V				
C023	1-136-165-00	FILM	0.1 μ F	5%	50V				
C024	1-126-967-11	ELECT	47 μ F	20%	16V				
C025	1-163-117-00	CERAMIC CHIP	100PF	5%	50V				
C026	1-163-117-00	CERAMIC CHIP	100PF	5%	50V				
C027	1-163-117-00	CERAMIC CHIP	100PF	5%	50V				
C028	1-163-117-00	CERAMIC CHIP	100PF	5%	50V				
C101	1-107-907-11	ELECT	22 μ F	20%	50V				
C102	1-107-635-11	ELECT	4.7 μ F	20%	160V				

A

The components identified by shading and marked Δ are critical for safety.
Replace only with part number specified.

Les composants identifiés par une trame et une marque Δ sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

REF NO.	PART NO.	DESCRIPTION	REMARK	REF NO.	PART NO.	DESCRIPTION	REMARK
C103	1-102-050-00	CERAMIC	0.01 μ F 99% 500V	C369	1-102-824-00	CERAMIC 470PF 5% 50V	(PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/ SSM-20N1E, 20N1U)
C201	1-126-964-11	ELECT	10 μ F 20% 50V	C370	1-102-121-00	CERAMIC 0.0022 μ F 10% 50V	(PVM-14N1A, 14N1E, 14N1MDE, 14N1U, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14N1U)
C202	1-126-964-11	ELECT	10 μ F 20% 50V	C370	1-102-824-00	CERAMIC 470PF 5% 50V	(PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/ SSM-20N1E, 20N1U)
C203	1-126-934-11	ELECT	220 μ F 20% 16V	C371	1-164-232-11	CERAMIC 0.01 μ F 10% 50V	(PVM-14N1A, 14N1E, 14N1MDE, 14N1U, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14N1U)
C204	1-126-964-11	ELECT	10 μ F 20% 50V	C372	1-124-667-11	ELECT 10 μ F 20% 50V	(PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/ SSM-20N1E, 20N1U)
C206	1-126-940-11	ELECT	330 μ F 20% 25V	C373	1-124-667-11	ELECT 10 μ F 20% 50V	(PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/ SSM-20N1E, 20N1U)
C207	1-163-017-00	CERAMIC CHIP	0.0047 μ F 10% 50V	C381	1-163-111-00	CERAMIC CHIP 56PF 5% 50V	(PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/ SSM-20N1E, 20N1U)
C304	1-164-232-11	CERAMIC CHIP	0.01 μ F 10% 50V	C382	1-163-111-00	CERAMIC CHIP 56PF 5% 50V	(PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/ SSM-20N1E, 20N1U)
C305	1-164-232-11	CERAMIC CHIP	0.01 μ F 10% 50V	C383	1-163-111-00	CERAMIC CHIP 56PF 5% 50V	(PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/ SSM-20N1E, 20N1U)
C306	1-164-232-11	CERAMIC CHIP	0.01 μ F 10% 50V	C402	1-126-964-11	ELECT 10 μ F 20% 50V	(EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)
C307	1-126-964-11	ELECT	10 μ F 20% 50V	C403	1-136-155-00	FILM 0.015 μ F 5% 50V	(EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)
C308	1-163-809-11	CERAMIC CHIP	0.047 μ F 10% 25V	C404	1-136-155-00	FILM 0.015 μ F 5% 50V	(EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)
C309	1-164-232-11	CERAMIC CHIP	0.01 μ F 10% 50V	C405	1-136-155-00	FILM 0.015 μ F 5% 50V	(EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)
C310	1-164-232-11	CERAMIC CHIP	0.01 μ F 10% 50V	C407	1-126-964-11	ELECT 10 μ F 20% 50V	(EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)
C311	1-164-232-11	CERAMIC CHIP	0.01 μ F 10% 50V	C409	1-126-964-11	ELECT 10 μ F 20% 50V	(EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)
C312	1-126-964-11	ELECT	10 μ F 20% 50V	C410	1-164-232-11	CERAMIC CHIP 0.01 μ F 10% 50V	(EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)
C313	1-136-169-00	FILM	0.22 μ F 5% 50V	C411	1-164-232-11	CERAMIC CHIP 0.01 μ F 10% 50V	(EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)
C314	1-136-495-11	FILM	0.068 μ F 5% 50V	C412	1-126-964-11	ELECT 10 μ F 20% 50V	(EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)
C315	1-164-232-11	CERAMIC CHIP	0.01 μ F 10% 50V	C413	1-136-175-00	FILM 0.68 μ F 5% 50V	(PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
C316	1-126-933-11	ELECT	100 μ F 20% 16V	C414	1-163-121-00	CERAMIC CHIP 150PF 5% 50V	(PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
C317	1-136-495-11	FILM	0.068 μ F 5% 50V	C415	1-164-232-11	CERAMIC CHIP 0.01 μ F 10% 50V	(PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)
C318	1-164-232-11	CERAMIC CHIP	0.01 μ F 10% 50V	C416	1-164-232-11	CERAMIC CHIP 0.01 μ F 10% 50V	(EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)
C319	1-164-232-11	CERAMIC CHIP	0.01 μ F 10% 50V	C417	1-164-232-11	CERAMIC CHIP 0.01 μ F 10% 50V	(EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)
C321	1-164-232-11	CERAMIC CHIP	0.01 μ F 10% 50V	C453	1-136-175-00	FILM 0.68 μ F 5% 50V	(EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)
C322	1-164-232-11	CERAMIC CHIP	0.01 μ F 10% 50V	C454	1-136-175-00	FILM 0.68 μ F 5% 50V	(EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)
C323	1-163-009-11	CERAMIC CHIP	0.001 μ F 10% 50V	C455	1-102-125-00	CERAMIC 4700P 10% 50V	(EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)
C324	1-163-117-00	CERAMIC CHIP	100PF 5% 50V	C500	1-123-024-21	ELECT 33 μ F 160V	
C325	1-126-968-11	ELECT	100 μ F 20% 50V	<input checked="" type="checkbox"/> C501 Δ	FILM	3%	2KV
C327	1-163-105-00	CERAMIC CHIP	33PF 5% 50V	<input checked="" type="checkbox"/> C501 Δ	FILM	3%	2KV
C328	1-163-105-00	CERAMIC CHIP	33PF 5% 50V	<input checked="" type="checkbox"/> C502 Δ	FILM	10%	630V
C329	1-163-105-00	CERAMIC CHIP	33PF 5% 50V	<input checked="" type="checkbox"/> C502 Δ	FILM	5%	400V
C330	1-126-959-11	ELECT	0.47 μ F 20% 50V	<input checked="" type="checkbox"/> C503 Δ	CERAMIC	10%	2KV
C351	1-126-964-11	ELECT	10 μ F 20% 50V	<input checked="" type="checkbox"/> C504 Δ	CERAMIC	10%	2KV
C352	1-163-005-11	CERAMIC CHIP	470PF 10% 50V	C505	1-130-489-00	FILM 0.033 μ F 5% 50V	
C353	1-163-005-11	CERAMIC CHIP	470PF 10% 50V	C506	1-136-541-11	FILM 1.5 μ F 5% 200V	
C354	1-163-005-11	CERAMIC CHIP	470PF 10% 50V	C507	1-136-113-00	FILM 2 μ F 5% 200V	
C355	1-163-117-00	CERAMIC CHIP	100PF 5% 50V	C508	1-102-228-00	CERAMIC 470PF 10% 500V	
C356	1-163-117-00	CERAMIC CHIP	100PF 5% 50V				
C357	1-163-117-00	CERAMIC CHIP	100PF 5% 50V				
C358	1-126-964-11	ELECT	10 μ F 20% 50V				
C359	1-164-232-11	CERAMIC CHIP	0.01 μ F 10% 50V				
C360	1-163-113-00	CERAMIC CHIP	68PF 5% 50V				
C361	1-163-113-00	CERAMIC CHIP	68PF 5% 50V				
C362	1-163-113-00	CERAMIC CHIP	68PF 5% 50V				
C363	1-163-101-00	CERAMIC CHIP	22PF 5% 50V				
C364	1-163-101-00	CERAMIC CHIP	22PF 5% 50V				
C365	1-163-101-00	CERAMIC CHIP	22PF 5% 50V				
C367	1-163-007-11	CERAMIC CHIP	680PF 10% 50V				
C368	1-102-824-00	CERAMIC	470PF 5% 50V (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/ SSM-20N1E, 20N1U)				
C369	1-102-121-00	CERAMIC	0.0022 μ F 10% 50V (PVM-14N1A, 14N1E, 14N1MDE, 14N1U, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14N1U)				

A

The components identified by shading and marked Δ are critical for safety.
Replace only with part number specified.

Les composants identifiés par une trame et une marque Δ sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

REF NO.	PART NO.	DESCRIPTION	REMARK	REF NO.	PART NO.	DESCRIPTION	REMARK				
C509	I-126-772-11	ELECT	1 μ F 20% 250V	D201	8-719-947-26	DIODE MTZJ-T-72-6.2C					
C510	I-136-103-00	FILM (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)	0.1 μ F 5% 200V	D301	8-719-991-33	DIODE ISS133T-77					
C511	I-106-371-00	MYLAR	0.015 μ F 99% 200V	D302	8-719-991-33	DIODE ISS133T-77					
C512	I-102-228-00	CERAMIC	470PF 10% 500V	D303	8-719-991-33	DIODE ISS133T-77					
C514	I-107-924-11	ELECT	0.47 μ F 20% 50V	D304	8-719-914-43	DIODE DAN202K-T-146					
C516	I-126-941-11	ELECT	470 μ F 20% 25V	D305	8-719-914-44	DIODE DAP202K					
C518	I-126-941-11	ELECT	470 μ F 20% 25V	D306	8-719-914-44	DIODE DAP202K					
C522	I-107-638-11	ELECT	33 μ F 20% 160V	D350	8-719-914-44	DIODE DAP202K					
C523	I-162-114-00	CERAMIC	0.0047 μ F 2KV	D351	8-719-914-44	DIODE DAP202K					
C551	I-126-804-11	ELECT	100 μ F 20% 35V	D352	8-719-914-44	DIODE DAP202K					
C552	I-137-401-11	FILM	0.22 μ F 10% 100V	D501	8-719-945-80	DIODE ERC06-15S					
C553	I-126-963-11	ELECT	4.7 μ F 20% 50V	D502	8-719-979-85	DIODE EGP20G					
C554	I-163-009-11	CERAMIC CHIP	0.001 μ F 10% 50V	D503	8-719-908-03	DIODE GP08D					
C555	I-124-667-11	ELECT	10 μ F 20% 50V	D504	8-719-908-03	DIODE GP08D					
C556	I-124-667-11	ELECT	10 μ F 20% 50V	D505	8-719-109-85	DIODE RD5.1ESB2					
C601 Δ	I-107-564-11	FILM	0.22 μ F 20% 300V	D506	8-719-302-43	DIODE EL1Z					
C602 Δ	I-107-564-11	FILM	0.22 μ F 20% 300V	D507	8-719-302-43	DIODE EL1Z					
C603 Δ	I-161-953-51	CERAMIC	0.0047 μ F 20% 400V	D508	8-719-302-43	DIODE EL1Z					
C604 Δ	I-161-953-51	CERAMIC	0.0047 μ F 20% 400V	D509	8-719-028-72	DIODE RGP02-17EL-6433					
C605 Δ	I-161-953-51	CERAMIC	0.0047 μ F 20% 400V	D510	8-719-302-43	DIODE EL1Z					
C606 Δ	I-161-953-51	CERAMIC	0.0047 μ F 20% 400V	D551	8-719-908-03	DIODE GP08D					
C607	I-113-608-11	ELECT(SOLID)	470 μ F 20% 400V	D552	8-719-109-85	DIODE RD5.1ESB2					
C609	I-136-064-00	FILM	0.002 μ F 3% 2KV	D601 Δ	8-719-025-88	DIODE GBU4JL-6088					
C610	I-126-970-11	ELECT	330 μ F 20% 50V	D602	4-382-854-11	SCREW (M3X10), P, SW (+); D601					
C611	I-164-161-11	CERAMIC CHIP	0.0022 μ F 10% 50V	D605	8-719-302-43	DIODE EL1Z					
C612	I-107-911-11	ELECT	220 μ F 20% 50V	D606	8-719-921-63	DIODE MTZJ-7.5B					
C613	I-137-484-11	FILM	0.47 μ F 10% 630V	D607	8-719-302-43	DIODE EL1Z					
C615 Δ	I-107-564-11	FILM	0.22 μ F 20% 300V	D609	8-719-302-43	DIODE EL1Z					
C616 Δ	I-162-577-81	CERAMIC	0.0022 μ F 20% 400V	D610	8-719-991-33	DIODE ISS133T-77					
C617 Δ	I-107-911-11	CERAMIC	0.0022 μ F 20% 400V	D611	8-719-312-10	DIODE RU4AM-T3					
C618 Δ	I-107-911-11	CERAMIC	0.0022 μ F 20% 400V	D651	8-719-045-48	DIODE FML-G12S					
C619 Δ	I-107-911-11	CERAMIC	0.0022 μ F 20% 400V	D653	8-719-046-66	DIODE SLR-56MC3F (POWER)					
C651	I-125-494-11	ELECT(BLOCK)	560 μ F 20% 160V	D655		< FUSE >					
C653	I-107-891-11	ELECT	3300 μ F 20% 50V	F601 Δ	I-532-746-11	FUSE, GLASS TUBE (4A/125V) (PVM-14N1C, 14N2U, 20N1U, 20N2U/SSM-14N1U, 20N1U)					
C654	I-107-364-11	FILM	0.01 μ F 10% 200V	F601 Δ	I-576-231-21	FUSE (H.B.C) (4A/250V) (PVM-14N1C, 14N1E, 14N2A, 14N2E, 20N1A, 20N1E, 20N2A, 20N2E/SSM-14N1E, 20N1E)					
C655	I-126-964-11	ELECT	10 μ F 20% 50V	F601 Δ	I-576-231-11	FUSE (H.B.C) (4A/250V) (PVM-14N1MDE)					
C656	I-124-667-11	ELECT	10 μ F 20% 50V	F602 Δ	I-533-223-11	HOLDER, FUSE; F602 (PVM-14N1MDE)					
C671	I-124-667-11	ELECT	10 μ F 20% 50V	F651 Δ	I-532-745-11	FUSE, GLASS TUBE (3.15A/125V)					
< CONNECTOR >											
CN052	* I-564-508-11	PLUG, CONNECTOR 5P		F601 Δ	I-533-223-11	HOLDER, FUSE; F601					
CN053	1-766-922-11	CONNECTOR, BOARD TO BOARD 18P		F602 Δ	I-533-223-11	HOLDER, FUSE; F602 (PVM-14N1MDE)					
CN201	* I-564-506-11	PLUG, CONNECTOR 3P		F651 Δ	I-533-223-11	HOLDER, FUSE; F651					
CN351	* I-564-509-11	PLUG, CONNECTOR 6P		< FERRITE BEAD >							
CN401	* I-564-509-11	PLUG, CONNECTOR 6P		FB001	1-410-397-21	FERRITE BEAD INDUCTOR	1.1 μ H				
CN402	* I-564-510-11	PLUG, CONNECTOR 7P (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20N1U)		FB301	1-410-397-21	FERRITE BEAD INDUCTOR	1.1 μ H				
CN501	* I-580-798-11	CONNECTOR PIN (DY) 6P		FB601	1-410-396-41	FERRITE BEAD INDUCTOR	0.45 μ H				
CN502	* I-508-768-00	PIN, CONNECTOR (5MM PITCH) 6P		FB602	1-410-396-41	FERRITE BEAD INDUCTOR	0.45 μ H				
CN601	* I-580-843-11	PIN, CONNECTOR (POWER)		FB603	1-410-396-41	FERRITE BEAD INDUCTOR	0.45 μ H				
CN602	* I-508-765-00	PIN, CONNECTOR (5MM PITCH) 3P		FB1301	1-410-396-41	FERRITE BEAD INDUCTOR	0.45 μ H				
< DIODE >											
D001	8-719-991-33	DIODE ISS133T-77		< FILTER >							
D002	8-719-991-33	DIODE ISS133T-77		FL301	1-233-462-11	FILTER, LOW PASS					
D101	8-719-914-44	DIODE DAP202K		FL302	1-233-462-11	FILTER, LOW PASS					
D102	8-719-983-38	DIODE MTZJ-T-77-36B									
D103	8-719-302-43	DIODE EL1Z									

A

The components identified by shading and marked Δ are critical for safety.
Replace only with part number specified.

Les composants identifiés par une trame et une marque Δ sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

REF NO.	PART NO.	DESCRIPTION	REMARK	REF NO.	PART NO.	DESCRIPTION	REMARK		
<IC>									
IC001	8-752-877-93	IC CXP85220A-033S		L551	1-459-104-00	COIL, WITH CORE			
	1-540-044-11	SOCKET, IC; IC001		L601	1-411-541-11	COIL, CHOKE 7.2mmH			
IC002	8-759-370-33	IC ST24C04FB6		< PHOTO COUPLER >					
IC003	8-759-279-41	IC MM1096BD		PH601	8-749-923-50	PHOTO COUPLER PC111YS			
IC201	8-759-324-57	IC TDA7052A		<IC LINK>					
IC301	8-759-434-04	IC VDP3108-PP-A1		PS001 Δ	1-532-727-11	LINK, IC 0.25A (PVM-20N1A, 20NIE, 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)			
IC401	8-759-000-48	IC MC14052BCP (EXCEPT SSM-14N1E, 14NIU, 20N1E, 20N1U)		< TRANSISTOR >					
IC402	8-759-046-77	IC BA7602 (EXCEPT SSM-14N1E, 14NIU, 20N1E, 20N1U)		Q004	8-729-120-28	TRANSISTOR 2SC1623-L5L6			
IC551	8-759-192-71	IC STV9379		Q005	8-729-120-28	TRANSISTOR 2SC1623-L5L6			
	4-201-023-01	SPACER, INSULATING; IC551		Q101	8-729-200-17	TRANSISTOR 2SA1091-O			
IC552	8-759-145-58	IC μ PC4558C		Q102	8-729-120-28	TRANSISTOR 2SC1623-L5L6			
IC601	8-749-010-84	IC STR-S6708		Q201	8-729-019-01	TRANSISTOR 2SD2394-EF			
	4-382-854-11	SCREW (M3X10), P, SW (+); IC601		Q301	8-729-026-48	TRANSISTOR 2SA1037AK-T146-Q			
IC651	8-749-921-89	IC SE115N		Q302	8-729-026-48	TRANSISTOR 2SA1037AK-T146-Q			
IC652	8-759-231-53	IC TA7805S		Q303	8-729-120-28	TRANSISTOR 2SC1623-L5L6			
IC653	8-759-231-53	IC TA7805S		Q304	8-729-026-48	TRANSISTOR 2SA1037AK-T146-Q			
IC654	8-759-701-59	IC NJM78M09FA		Q351	8-729-120-28	TRANSISTOR 2SC1623-L5L6			
	4-382-854-11	SCREW (M3X10), P, SW (+); IC654		Q352	8-729-026-48	TRANSISTOR 2SA1037AK-T146-Q			
< CHIP CONDUCTOR >									
JR1	1-216-295-00	CONDUCTOR, CHIP(2012)		Q353	8-729-026-48	TRANSISTOR 2SA1037AK-T146-Q			
JR2	1-216-295-00	CONDUCTOR, CHIP(2012)		Q354	8-729-120-28	TRANSISTOR 2SC1623-L5L6			
JR3	1-216-295-00	CONDUCTOR, CHIP(2012)		Q355	8-729-120-28	TRANSISTOR 2SC1623-L5L6			
JR4	1-216-295-00	CONDUCTOR, CHIP(2012)		Q356	8-729-026-48	TRANSISTOR 2SA1037AK-T146-Q			
JR5	1-216-295-00	CONDUCTOR, CHIP(2012)		Q357	8-729-026-48	TRANSISTOR 2SA1037AK-T146-Q			
JR6	1-216-295-00	CONDUCTOR, CHIP(2012)		Q358	8-729-120-28	TRANSISTOR 2SC1623-L5L6			
JR7	1-216-295-00	CONDUCTOR, CHIP(2012)		Q359	8-729-120-28	TRANSISTOR 2SC1623-L5L6			
JR8	1-216-295-00	CONDUCTOR, CHIP(2012)		Q360	8-729-026-48	TRANSISTOR 2SA1037AK-T146-Q			
JR9	1-216-295-00	CONDUCTOR, CHIP(2012)		Q361	8-729-026-48	TRANSISTOR 2SA1037AK-T146-Q			
JR10	1-216-295-00	CONDUCTOR, CHIP(2012)		Q362	8-729-120-28	TRANSISTOR 2SC1623-L5L6			
JR11	1-216-295-00	CONDUCTOR, CHIP(2012)		Q501	8-729-810-49	TRANSISTOR 2SD1877S-SONY-CA (PVM-14N1A, 14N1E, 14N1MDE, 14N1U, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14N1U)			
JR12	1-216-295-00	CONDUCTOR, CHIP(2012)		Q501	8-729-821-87	TRANSISTOR 2SD1878-CA (PVM-20N1A, 20NIE, 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)			
JR13	1-216-295-00	CONDUCTOR, CHIP(2012)		Q501	4-382-854-11	SCREW (M3X10), P, SW (+); Q501			
JR14	1-216-295-00	CONDUCTOR, CHIP(2012)		Q502	8-729-140-50	TRANSISTOR 2SC3209LK-TP			
JR124	1-216-295-00	CONDUCTOR, CHIP(2012)		Q551	8-729-019-01	TRANSISTOR 2SD2394-EF			
JR125	1-216-295-00	CONDUCTOR, CHIP(2012)		Q551	4-201-023-01	SPACER, INSULATING; Q551			
JR451	1-216-295-00	CONDUCTOR, CHIP (2012) (PVM-14N1A, 14N1E, 14N1MDE, 14N1U, 20N1A, 20N1E, 20N1U/SSM-14N1E, 14N1U, 20N1E, 20N1U)		Q601	4-202-373-01	SPRING, IC; Q551			
< COIL >									
L001	1-408-418-00	INDUCTOR 56 μ H		< RESISTOR >					
L101	1-421-465-00	COIL, FERRITE CHOKE 68 μ H		R001	1-216-073-00	METAL GLAZE	10K	5%	1/10W
L501	1-421-465-00	COIL, FERRITE CHOKE 68 μ H		R002	1-216-073-00	METAL GLAZE	10K	5%	1/10W
L502	1-459-105-21	COIL(WITH CORE)		R003	1-216-073-00	METAL GLAZE	10K	5%	1/10W
L503	1-412-553-11	INDUCTOR 3.3mmH		R004	1-216-073-00	METAL GLAZE	10K	5%	1/10W
L504	1-459-104-00	COIL, WITH CORE		R005	1-216-073-00	METAL GLAZE	10K	5%	1/10W
L505	1-459-760-13	COIL, HORIZONTAL LINEARITY (PVM-14N1A, 14N1E, 14N1MDE, 14N1U, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14N1U)		R007	1-216-073-00	METAL GLAZE	10K	5%	1/10W
L505	1-459-769-13	COIL, HORIZONTAL LINEARITY (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/ SSM-20N1E, 20N1U)		R010	1-216-025-00	METAL GLAZE	100	5%	1/10W
L510	1-407-365-00	COIL,CHOKE		R011	1-216-295-00	CONDUCTOR, CHIP(2012)			
				R012	1-216-025-00	METAL GLAZE	100	5%	1/10W
				R013	1-216-025-00	METAL GLAZE	100	5%	1/10W
				R014	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W

A

NOTE 1:

The constants of R351, R361, and R370 are changed when V901 is changed.
Refer to SECTION 8. Electrical Parts List on page 71 for the list of serial numbers.

REF NO.	PART NO.	DESCRIPTION	REMARK	REF NO.	PART NO.	DESCRIPTION	REMARK
R015	1-216-065-00	METAL GLAZE	4.7K 5% 1/10W	R306	1-216-081-00	METAL GLAZE	22K 5% 1/10W
R016	1-216-073-00	METAL GLAZE	10K 5% 1/10W	R307	1-216-077-00	METAL GLAZE	15K 5% 1/10W
R017	1-216-073-00	METAL GLAZE	10K 5% 1/10W	R308	1-216-001-00	METAL GLAZE	10 5% 1/10W
R022	1-216-073-00	METAL GLAZE	10K 5% 1/10W	R311	1-216-057-00	METAL GLAZE	2.2K 5% 1/10W
R023	1-216-025-00	METAL GLAZE	100 5% 1/10W	R312	1-216-295-00	CONDUCTOR, CHIP(2012)	
R024	1-216-025-00	METAL GLAZE	100 5% 1/10W	R313	1-216-065-00	METAL GLAZE	4.7K 5% 1/10W
R027	1-216-073-00	METAL GLAZE	10K 5% 1/10W	R315	1-216-085-00	METAL GLAZE	33K 5% 1/10W
R028	1-216-073-00	METAL GLAZE	10K 5% 1/10W	R316	1-216-043-91	METAL GLAZE	560 5% 1/10W
R029	1-216-073-00	METAL GLAZE	10K 5% 1/10W	R318	1-216-057-00	METAL GLAZE	2.2K 5% 1/10W
R030	1-216-675-11	METAL CHIP	10K 0.50% 1/10W	R319	1-216-049-00	METAL GLAZE	1K 5% 1/10W
R031	1-216-675-11	METAL CHIP	10K 0.50% 1/10W	R320	1-216-049-00	METAL GLAZE	1K 5% 1/10W
R032	1-216-675-11	METAL CHIP	10K 0.50% 1/10W	R321	1-216-049-00	METAL GLAZE	1K 5% 1/10W
R035	1-216-073-00	METAL GLAZE	10K 5% 1/10W	R322	1-216-049-00	METAL GLAZE	1K 5% 1/10W
R036	1-216-073-00	METAL GLAZE	10K 5% 1/10W	R323	1-216-049-00	METAL GLAZE	1K 5% 1/10W
R053	1-216-065-00	METAL GLAZE	4.7K 5% 1/10W	R324	1-216-049-00	METAL GLAZE	1K 5% 1/10W
R054	1-216-065-00	METAL GLAZE	4.7K 5% 1/10W	R325	1-216-049-00	METAL GLAZE	1K 5% 1/10W
R055	1-216-025-00	METAL GLAZE	100 5% 1/10W	R351	1-216-642-11	METAL CHIP	430 0.50% 1/10W (PVM-14N1A, 14N1E, 14N1U, 14N2A, 14N2E, 14N2U/ SSM-14N1E, 14N1U)
R056	1-216-025-00	METAL GLAZE	100 5% 1/10W				
R057	1-216-073-00	METAL GLAZE	10K 5% 1/10W				
R058	1-216-073-00	METAL GLAZE	10K 5% 1/10W	NOTE 1:			
R059	1-216-073-00	METAL GLAZE	10K 5% 1/10W	R351	1-216-644-11	METAL CHIP	510 0.50% 1/10W (PVM-14N1A, 14N1E, 14N1MDE, 14N1U, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14N1U)
R101	1-216-391-11	METAL OXIDE	1.5 5% 3W F	R351	1-216-646-11	METAL CHIP	620 0.50% 1/10W (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)
R101	1-216-390-11	METAL OXIDE	1.2 5% 3W F (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)				
R102	1-216-667-11	METAL CHIP	4.7K 0.50% 1/10W	NOTE 1:			
R103	1-216-115-00	METAL GLAZE	560K 5% 1/10W	R351	1-216-647-11	METAL CHIP	680 0.50% 1/10W (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)
R104	1-218-754-11	METAL CHIP	120K 0.50% 1/10W	R353	1-216-645-11	METAL CHIP	560 0.50% 1/10W
R105	1-218-756-11	METAL CHIP	150K 0.50% 1/10W	R354	1-216-657-11	METAL CHIP	1.8K 0.50% 1/10W
R106	1-216-097-00	METAL GLAZE	100K 5% 1/10W	R355	1-216-075-00	METAL GLAZE	12K 5% 1/10W
R107	1-216-097-00	METAL GLAZE	100K 5% 1/10W	R357	1-216-637-11	METAL CHIP	270 0.50% 1/10W
R108	1-216-683-11	METAL CHIP	22K 0.5% 1/10W (PVM-14N1A, 14N1E, 14N1MDE, 14N1U, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14N1U)	R358	1-216-001-00	METAL GLAZE	10 5% 1/10W
R108	1-216-682-11	METAL CHIP	20K 0.50% 1/10W (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)	R361	1-216-642-11	METAL CHIP	430 0.50% 1/10W (PVM-14N1A, 14N1E, 14N1U, 14N2A, 14N2E, 14N2U/ SSM-14N1E, 14N1U)
R110	1-216-693-11	METAL CHIP	56K 0.50% 1/10W (PVM-14N1A, 14N1E, 14N1MDE, 14N1U, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14N1U)	NOTE 1:			
R110	1-216-695-11	METAL CHIP	68K 0.5% 1/10W (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)	R361	1-216-644-11	METAL CHIP	510 0.50% 1/10W (PVM-14N1A, 14N1E, 14N1MDE, 14N1U, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14N1U)
R112	1-216-073-00	METAL GLAZE	10K 5% 1/10W	R361	1-216-646-11	METAL CHIP	620 0.50% 1/10W (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)
R201	1-216-093-00	METAL GLAZE	68K 5% 1/10W	NOTE 1:			
R202	1-216-069-00	METAL GLAZE	6.8K 5% 1/10W	R361	1-216-647-11	METAL CHIP	680 0.50% 1/10W (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)
R203	1-216-049-00	METAL GLAZE	1K 5% 1/10W	R362	1-216-645-11	METAL CHIP	560 0.50% 1/10W
R204	1-215-907-11	METAL OXIDE	22 5% 3W F	R363	1-216-657-11	METAL CHIP	1.8K 0.50% 1/10W
R205	1-216-056-00	METAL GLAZE	2K 5% 1/10W	R364	1-216-075-00	METAL GLAZE	12K 5% 1/10W
R207	1-216-055-00	METAL GLAZE	1.8K 5% 1/10W	R366	1-216-637-11	METAL CHIP	270 0.50% 1/10W
R208	1-216-065-00	METAL GLAZE	4.7K 5% 1/10W	R367	1-216-001-00	METAL GLAZE	10 5% 1/10W
R209	1-216-057-00	METAL GLAZE	2.2K 5% 1/10W	R370	1-216-642-11	METAL CHIP	430 0.50% 1/10W (PVM-14N1A, 14N1E, 14N1U, 14N2A, 14N2E, 14N2U/ SSM-14N1E, 14N1U)
R301	1-216-025-00	METAL GLAZE	100 5% 1/10W	NOTE 1:			
R302	1-216-025-00	METAL GLAZE	100 5% 1/10W	R370	1-216-644-11	METAL CHIP	510 0.50% 1/10W (PVM-14N1A, 14N1E, 14N1MDE, 14N1U, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14N1U)
R303	1-216-055-00	METAL GLAZE	1.8K 5% 1/10W				
R304	1-202-826-00	SOLID	4.7K 10% 1/2W				
R305	1-216-065-00	METAL GLAZE	4.7K 5% 1/10W				

A

The components identified by shading and marked Δ are critical for safety.
Replace only with part number specified.

Les composants identifiés par une trame et une marque Δ sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

REF NO.	PART NO.	DESCRIPTION	REMARK	REF NO.	PART NO.	DESCRIPTION	REMARK	
R370	1-216-646-11	METAL CHIP	620 0.50% 1/10W (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)		R569	1-216-097-00	METAL GLAZE	100K 5% 1/10W
NOTE 1: R370	1-216-647-11	METAL CHIP	680 0.50% 1/10W (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)		R570	1-216-422-11	METAL OXIDE	18 5% 1W F (PVM-14N1A, 14N1E, 14N1MDE, 14N1U, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14N1U)
R371	1-216-645-11	METAL CHIP	560 0.50% 1/10W		R570	1-216-423-11	METAL OXIDE	27 5% 1W F (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)
R372	1-216-657-11	METAL CHIP	1.8K 0.50% 1/10W		R601 Δ	1-202-885-91	SOLID	1M 20% 1/2W
R373	1-216-075-00	METAL GLAZE	12K 5% 1/10W		R602	1-216-490-11	METAL OXIDE	39K 5% 3W F
R375	1-216-637-11	METAL CHIP	270 0.50% 1/10W		R604	1-215-877-11	METAL OXIDE	22K 5% 1W F
R376	1-216-001-00	METAL GLAZE	10 5% 1/10W		R605	1-215-869-11	METAL OXIDE	1K 5% 1W F
R378	1-216-001-00	METAL GLAZE	10 5% 1/10W		R606	1-249-421-11	CARBON	2.2K 5% 1/4W
R379	1-216-001-00	METAL GLAZE	10 5% 1/10W		R607	1-249-417-11	CARBON	1K 5% 1/4W
R380	1-216-001-00	METAL GLAZE	10 5% 1/10W		R608	1-217-241-00	WIREWOUND	0.22 10% 3W F
R381	1-216-657-11	METAL CHIP	1.8K 0.50% 1/10W		R609	1-247-807-31	CARBON	100 5% 1/4W
R382	1-216-657-11	METAL CHIP	1.8K 0.50% 1/10W		R610	1-216-470-00	METAL OXIDE	18 5% 3W F
R383	1-216-657-11	METAL CHIP	1.8K 0.50% 1/10W		R611	1-249-417-11	CARBON	1K 5% 1/4W
R401	1-216-041-00	METAL GLAZE	470 5% 1/10W (PVM-14N2A, 14N2E, 14N2U, 20N2A, 20N2E, 20N2U)		R612 Δ	1-205-998-11	WIREWOUND	1 5% 10W
R402	1-216-073-00	METAL GLAZE	10K 5% 1/10W		R613	1-249-426-11	CARBON	5.6K 5% 1/4W
R501	1-216-025-00	METAL GLAZE	100 5% 1/10W		R614 Δ	1-202-725-91	SOLID	3.3M 10% 1/2W
R502	1-216-061-00	METAL GLAZE	3.3K 5% 1/10W		R615 Δ	1-202-725-91	SOLID	3.3M 10% 1/2W
R503	1-215-895-11	METAL OXIDE	3.3K 5% 2W F (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)		R616 Δ	1-205-998-11	WIREWOUND	1 5% 10W
R503	1-215-896-00	METAL OXIDE	4.7K 5% 2W F (PVM-14N1A, 14N1E, 14N1MDE, 14N1U, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14N1U)		R622	1-249-424-11	CARBON	3.9K 5% 1/4W
R506	1-260-326-11	CARBON	680 5% 1/2W		R623	1-216-490-11	METAL OXIDE	39K 5% 3W F
R507	1-215-864-00	METAL OXIDE	150 5% 1W F		R657	1-249-417-11	CARBON	1K 5% 1/4W
R508	1-215-422-11	METAL OXIDE	18 5% 1W F (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)		R658	1-212-954-11	FUSIBLE	6.8 5% 1/2W F
R508	1-216-423-11	METAL OXIDE	27 5% 1W F (PVM-14N1A, 14N1E, 14N1MDE, 14N1U, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14N1U)		R1201	1-215-882-00	METAL OXIDE	22 5% 2W F
R509	1-216-049-00	METAL GLAZE	1K 5% 1/10W				< SWITCH >	
R513	1-247-887-00	CARBON	220K 5% 1/4W		S001	1-571-532-21	SWITCH, TACTIL	
R514	1-249-419-11	CARBON	1.5K 5% 1/4W F		S002	1-571-532-21	SWITCH, TACTIL	
R551	1-216-429-00	METAL OXIDE	270 5% 1W F		S003	1-571-532-21	SWITCH, TACTIL	
R552	1-216-349-00	METAL OXIDE	1 5% 1W F		S004	1-571-532-21	SWITCH, TACTIL	
R553	1-216-073-00	METAL GLAZE	10K 5% 1/10W		S006	1-571-532-21	SWITCH, TACTIL	
R554	1-216-079-00	METAL GLAZE	18K 5% 1/10W				(PVM-14N1A, 14N1E, 14N1U, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14N1U)	
R555	1-216-073-00	METAL GLAZE	10K 5% 1/10W		S007	1-571-532-21	SWITCH, TACTIL	
R556	1-216-351-00	METAL OXIDE	1.5 5% 1W F		S008	1-571-532-21	SWITCH, TACTIL	
R557	1-216-053-00	METAL GLAZE	1.5K 5% 1/10W		S501	1-554-186-00	SWITCH, LEVER	
R558	1-216-031-00	METAL GLAZE	180 5% 1/10W		S601 Δ	1-571-433-31	SWITCH, PUSH (AC POWER) (POWER)	
R559	1-216-061-00	METAL GLAZE	3.3K 5% 1/10W				< SPARK GAP >	
R560	1-216-689-11	METAL GLAZE	39K 5% 1/10W		SG501	1-519-422-11	GAP, SPARK	
R561 Δ	1-532-727-91	LINK, IC (0.25A) ICP-N5 (PVM-14N1A, 14N1E, 14N1MDE, 14N1U, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14N1U)					< TRANSFORMER >	
R561	1-249-392-11	CARBON	8.2 5% 1/4W F (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)		T501 Δ	1-453-201-11	TRANSFORMER ASSY, FLYBACK (NX-2610/U2A) (PVM-14N1A, 14N1E, 14N1U, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14N1U)	
R562	1-216-295-00	CONDUCTOR, CHIP(2012)			T501 Δ	1-453-202-11	TRANSFORMER ASSY, FLYBACK (NX-2611/U2A) (PVM-20N1A, 20N1E, 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)	
R564	1-216-061-00	METAL GLAZE	3.3K 5% 1/10W		T501 Δ	1-540-006-12	TRANSFORMER ASSY, FLY BACK (NX-2610) (PVM-14N1MDE)	
R565	1-216-049-00	METAL GLAZE	1K 5% 1/10W		T502	1-437-090-31	HDT	
R566	1-216-073-00	METAL GLAZE	10K 5% 1/10W		T601 Δ	1-429-265-12	TRANSFORMER, CONVERTER (SKT)	
					T603 Δ	1-429-482-11	TRANSFORMER, LINE FILTER (LFT)	
							< THERMISTOR >	
					THP601 Δ	1-808-059-32	THERMISTOR, POSITIVE	

The components identified by shading and marked **A** are critical for safety.
Replace only with part number specified.

Les composants identifiés par une trame et une marque **A** sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

A

CA

CB

REF NO.	PART NO.	DESCRIPTION	REMARK	REF NO.	PART NO.	DESCRIPTION	REMARK			
< CRYSTAL >										
X001	1-567-781-11	VIBRATOR, CRYSTAL (4MHz)		R707	1-202-818-00	SOLID	1K 20% 1/2W			
X301	1-760-878-11	VIBRATOR, CRYSTAL (20.25MHz)		R708	1-202-818-00	SOLID	1K 20% 1/2W			

*A-1331-459-A CA BOARD COMPLETE (PVM-14N1A, 14N1E, ***** 14N1MDE, 14N1U, 14N2A, 14N2E, 14N2U /SSM-14N1E, 14N1U)				R722	1-216-373-11	METAL OXIDE	2.2 5% 2W			
				R723	1-216-486-00	METAL OXIDE	8.2K 5% 3W F			
				R724	1-216-486-00	METAL OXIDE	8.2K 5% 3W F			
				R725	1-216-486-00	METAL OXIDE	8.2K 5% 3W F			
				R730	1-249-409-11	CARBON	220 5% 1/4W			
				R731	1-249-903-00	CARBON	1M 5% 1/4W			
				R732	1-202-549-00	SOLID	100 20% 1/2W			
				R751	1-249-412-11	CARBON	390 5% 1/4W			
				R752	1-249-412-11	CARBON	390 5% 1/4W			
				R753	1-249-412-11	CARBON	390 5% 1/4W			
< CAPACITOR >										
C709	1-136-601-11	FILM	0.01μF 10%	630V	< VARIABLE RESISTOR >					
C710	1-102-002-00	CERAMIC	680PF 10%	500V	RV701	1-230-641-11	RES, ADJ, METAL GLAZE	2.2M		
C711	1-102-002-00	CERAMIC	680PF 10%	500V	RV702	1-230-641-11	RES, ADJ, METAL GLAZE	2.2M		
C712	1-102-002-00	CERAMIC	680PF 10%	500V	RV703	1-230-798-11	RES, ADJ, METAL GLAZE	90M		
C716	1-128-551-11	ELECT	22μF 20%	25V	*4-374-912-01	COVER (MAIN), CV VOL:	RV703			
C721	1-107-667-11	ELECT	2.2μF 20%	400V	*4-374-913-01	COVER (REAR LID), CV VOL:	RV703			
C723	1-162-116-00	CERAMIC	680PF 10%	2KV	< CONNECTOR >					
< CONNECTOR >										
CN701	*1-508-768-00	PIN, CONNECTOR (5MM PITCH) 6P	< CB BOARD, COMPLETE >			*A-1331-458-A CB BOARD, COMPLETE (PVM-20N1A, 20N1E, ***** 20N1U, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20N1U)				
CN702	*1-564-509-11	PLUG, CONNECTOR 6P								
CN703	1-695-915-11	TAB (CONTACT)								
< DIODE >										
D710	8-719-991-33	DIODE ISS133T-77	< CAPACITOR >			< CONNECTOR >				
D711	8-719-991-33	DIODE ISS133T-77	C709	1-136-601-11	FILM	0.01μF 10%	630V			
D712	8-719-991-33	DIODE ISS133T-77	C710	1-164-083-11	CERAMIC	680PF 10%	50V			
D713	8-719-991-33	DIODE ISS133T-77	C711	1-164-083-11	CERAMIC	680PF 10%	50V			
D714	8-719-991-33	DIODE ISS133T-77	C712	1-164-083-11	CERAMIC	680PF 10%	50V			
D715	8-719-991-33	DIODE ISS133T-77	D716	1-128-551-11	ELECT	22μF 20%	25V			
D716	8-719-991-33	DIODE ISS133T-77	C721	1-107-667-11	ELECT	2.2μF 20%	400V			
< JACK >										
J701 A 1-526-819-11 SOCKET, CRT										
< COIL >				< CONNECTOR >						
L701	1-410-671-31	INDUCTOR	47μH	CN701	*1-508-768-00	PIN, CONNECTOR (5MM PITCH) 6P				
< TRANSISTOR >				CN702	*1-564-509-11	PLUG, CONNECTOR 6P				
				CN703	1-695-915-11	TAB (CONTACT)				
< DIODE >										
Q701	8-729-119-76	TRANSISTOR 2SA1175-HFE	< DIODE >			< JACK >				
Q710	8-729-200-17	TRANSISTOR 2SA1091-O	D710	8-719-991-33	DIODE ISS133T-77					
Q711	8-729-200-17	TRANSISTOR 2SA1091-O	D711	8-719-991-33	DIODE ISS133T-77					
Q712	8-729-200-17	TRANSISTOR 2SA1091-O	D712	8-719-991-33	DIODE ISS133T-77					
Q713	8-729-906-70	TRANSISTOR BF871-127	D713	8-719-991-33	DIODE ISS133T-77					
Q714	8-729-906-70	TRANSISTOR BF871-127	D714	8-719-991-33	DIODE ISS133T-77					
Q715	8-729-906-70	TRANSISTOR BF871-127	D715	8-719-991-33	DIODE ISS133T-77					
< RESISTOR >				D716	8-719-991-33	DIODE ISS133T-77				
R701	1-202-846-00	SOLID	470K 20%	1/2W	J702 A 1-540-124-11 SOCKET, CRT					
R702	1-202-846-00	SOLID	470K 20%	1/2W	< COIL >					
R703	1-202-719-00	SOLID	1M 20%	1/2W	L701	1-410-478-11	INDUCTOR	47μH		
R704	1-202-838-00	SOLID	100K 20%	1/2W						
R705	1-202-842-11	SOLID	220K 20%	1/2W						
R706	1-202-818-00	SOLID	1K 20%	1/2W						

CB**S**

REF NO.	PART NO.	DESCRIPTION			REMARK	REF NO.	PART NO.	DESCRIPTION			REMARK	
< TRANSISTOR >						< DIODE >						
Q701	8-729-119-76	TRANSISTOR 2SA1175-HFE				D810	8-719-914-43	DIODE DAN202K-T-146				
Q710	8-729-200-17	TRANSISTOR 2SA1091-O				D811	8-719-914-43	DIODE DAN202K-T-146				
Q711	8-729-200-17	TRANSISTOR 2SA1091-O				D812	8-719-914-43	DIODE DAN202K-T-146				
Q712	8-729-200-17	TRANSISTOR 2SA1091-O				D813	8-719-914-43	DIODE DAN202K-T-146				
Q713	8-729-906-70	TRANSISTOR BF871-127				D814	8-719-914-44	DIODE DAP202K				
Q714	8-729-906-70	TRANSISTOR BF871-127				< IC >						
Q715	8-729-906-70	TRANSISTOR BF871-127				IC801	8-759-374-31	IC BA7606				
< RESISTOR >						IC802	8-759-031-92	IC MC14528BCP				
R701	1-202-846-00	SOLID	470K	20%	1/2W	< CHIP CONDUCTOR >						
R702	1-202-838-00	SOLID	100K	20%	1/2W	JR802	1-216-295-91	CONDUCTOR, CHIP(2012)				
R703	1-202-838-00	SOLID	100K	20%	1/2W	JR803	1-216-295-91	CONDUCTOR, CHIP(2012)				
R705	1-202-842-11	SOLID	220K	20%	1/2W	JR804	1-216-295-91	CONDUCTOR, CHIP(2012)				
R706	1-202-818-00	SOLID	1K	20%	1/2W	< TRANSISTOR >						
R707	1-202-818-00	SOLID	1K	20%	1/2W	Q802	8-729-026-48	TRANSISTOR 2SA1037AK-T146-Q				
R708	1-202-818-00	SOLID	1K	20%	1/2W	Q803	8-729-026-48	TRANSISTOR 2SA1037AK-T146-Q				
R722	1-216-397-11	METAL OXIDE	4.7	5%	2W	F	Q804	8-729-026-48	TRANSISTOR 2SA1037AK-T146-Q			
R723	1-216-486-00	METAL OXIDE	8.2K	5%	3W	F	< RESISTOR >					
R724	1-216-486-00	METAL OXIDE	8.2K	5%	3W	F	R801	1-216-665-11	METAL CHIP	3.9K	0.50%	1/10W
R725	1-216-486-00	METAL OXIDE	8.2K	5%	3W	F	R802	1-216-665-11	METAL CHIP	3.9K	0.50%	1/10W
R730	1-249-409-11	CARBON	220	5%	1/4W	F	R803	1-216-665-11	METAL CHIP	3.9K	0.50%	1/10W
R731	1-249-429-11	CARBON	10K	5%	1/4W	F	R804	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W
R732	1-202-549-00	SOLID	100	20%	1/2W	F	R805	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W
R751	1-247-821-00	CARBON	390	5%	1/4W	F	R806	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W
R752	1-247-821-00	CARBON	390	5%	1/4W	F	R807	1-216-083-00	METAL GLAZE	27K	5%	1/10W
R753	1-247-821-00	CARBON	390	5%	1/4W	F	R808	1-216-073-00	METAL GLAZE	10K	5%	1/10W
< VARIABLE RESISTOR >						R809	1-216-073-00	METAL GLAZE	10K	5%	1/10W	
RV701	1-230-641-11	RES, ADJ, METAL GLAZE	2.2M			R821	1-215-445-00	METAL	10K	1%	1/4W	
RV703	1-241-714-11	RES, ADJ, METAL FILM	110M			*****						
*****						R822	1-216-675-11	METAL CHIP	10K	0.50%	1/10W	
*A-1390-638-A S BOARD, COMPLETE						R823	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W	
*****						R824	1-215-445-00	METAL	10K	1%	1.4W	
< CAPACITOR >						R825	1-216-675-11	METTAL CHIP	10K	0.50%	1/10W	
*****						R826	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W	
C801	1-164-657-11	CERAMIC CHIP	0.015μF	10%	50V	*****						
C802	1-164-657-11	CERAMIC CHIP	0.015μF	10%	50V	R827	1-215-445-00	METAL	10K	1%	1/4W	
C803	1-164-657-11	CERAMIC CHIP	0.015μF	10%	50V	R828	1-216-675-11	METAL CHIP	10K	0.50%	1/10W	
C804	1-136-155-00	FILM	0.015μF	5%	50V	R829	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W	
C805	1-136-155-00	FILM	0.015μF	5%	50V	*****						
C806	1-136-155-00	FILM	0.015μF	5%	50V	*****						
C807	1-163-121-00	CERAMIC CHIP	150PF	5%	50V	*****						
C808	1-163-121-00	CERAMIC CHIP	150PF	5%	50V	*****						
C809	1-126-964-11	ELECT	10μF	20%	50V	*****						
C810	1-126-964-11	ELECT	10μF	20%	50V	*****						
C811	1-164-232-11	CERAMIC CHIP	0.01μF	10%	50V	*****						
C812	1-164-232-11	CERAMIC CHIP	0.01μF	10%	50V	*****						
< CONNECTOR >						*****						
CN801	1-766-925-11	CONNECTOR, BOARD TO BOARD	18P			*****						
CN802	* 1-564-522-11	PLUG, CONNECTOR	7P			*****						

The components identified by shading and marked Δ are critical for safety.
Replace only with part number specified.

Les composants identifiés par une trame et une marque Δ sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

REF NO.	PART NO.	DESCRIPTION	REMARK	REF NO.	PART NO.	DESCRIPTION	REMARK
		MISCELLANEOUS *****				ACCESSORIES & PACKING MATERIALS *****	
Δ	1-251-263-11	INLET, AC		Δ	1-534-827-21	CORD, POWER (PVM-14NIU, 14N2U, 20NIU, 20N2U/SSM-14NIU, 20NIU)	
Δ	1-426-442-21	COIL, DEMAGNETIZATION (PVM-14N1A, 14N1E, 14N1MDE, 14NIU, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14NIU)		Δ	1-551-631-22	CORD, POWER (PVM-14N1MDE)	
Δ	1-411-750-11	COIL, DEMAGNETIZATION (PVM-20N1A, 20N1E, 20NIU, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20NIU)		Δ	1-590-910-11	CORD SET, POWER (PVM-14N1A, 14N1E, 14N2A, 14N2E, 20N1A, 20N1E, 20N2A, 20N2E/SSM-14N1E, 20NIU)	
Δ	1-451-349-12	DEFLECTION YOKE (Y20FZA) (PVM-20N1A, 20N1E, 20NIU, 20N2A, 20N2E, 20N2U/ SSM-20N1E, 20NIU)		3-800-731-11		MANUAL, INSTRUCTION (EXCEPT SSM-14N1E, 14N1U, 20N1E, 20NIU)	
	1-452-032-00	MAGNET, DISC		3-800-732-11		MANUAL, INSTRUCTION (SSM-14N1E, 14N1U, 20N1E, 20NIU)	
	1-452-094-00	MAGNET, ROTATABLE DISC; 15MMØ		3-859-036-11		MANUAL, INSTRUCTION (PVM-14N1MDE) (ENGLISH, FRENCH, GERMAN, ITALIAN, SPANISH)	
Δ	1-505-188-11	SPEAKER (4X7CM)		4-048-073-01		COVER, DROP PROTECTION (PVM-14N1MDE)	
Δ	1-532-746-11	FUSE (H.B.C.) 4A/125V (PVM-14NIU, 14N2U, 20NIU, 20N2U/SSM-14NIU, 20NIU)		*4-048-473-01		INDIVIDUAL CARTON (PVM-20N1A, 20N1E, 20NIU, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20NIU)	
Δ	1-576-231-21	FUSE (H.B.C.) 4A/250A (PVM-14N1A, 14N1E, 14N2A, 14N2E, 20N1A, 20N1E, 20N2A, 20N2E/SSM-14N1E, 20NIU)		*4-048-474-01		CUSHION (UPPER) (ASSY) (PVM-20N1A, 20N1E, 20NIU, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20NIU)	
Δ	1-576-231-11	FUSE (H.B.C.) 4A/250A (PVM-14N1MDE)		*4-048-475-01		CUSHION (LOWER) (ASSY) (PVM-20N1A, 20N1E, 20NIU, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20NIU)	
	*1-900-214-07	WIRE ASSY, SAFETY EARTH		*4-048-606-01		INDIVIDUAL CARTON (PVM-14N1A, 14N1E, 14N1MDE, 14NIU, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14NIU)	
Δ	8-451-472-11	DYY14MGAT (PVM-14N1A, 14N1E, 14N1MDE, 14NIU, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14NIU)		*4-048-607-01		CUSHION (UPPER) (ASSY) (PVM-14N1A, 14N1E, 14N1MDE, 14NIU, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14NIU)	
Δ	1-543-633-21	CORE ASSY, BEAD (DIVISION TYPE) (PVM-14N1A, 14N1E, 14N1MDE, 14N2A, 14N2E, 20N1A, 20N1E, 20N2A, 20N2E/SSM-14N1E, 20NIU)		*4-048-608-01		CUSHION (LOWER) (ASSY) (PVM-14N1A, 14N1E, 14N1MDE, 14NIU, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14NIU)	
V901	Δ 8-738-336-05	PICTURE TUBE 14MG (PVM-14N1A, 14N1E, 14NIU, 14N2A, 14N2E, 14N2U/SSM-14N1, 14NIU)		*4-377-015-01		BAG, PROTECTION (PVM-14N1A, 14N1E, 14N1MDE, 14NIU, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14NIU)	
V901	Δ 8-736-130-05	PICTURE TUBE 20FZS (PVM-20N1A, 20N1E, 20NIU, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20NIU)		*4-381-155-01		BAG, PROTECTION (PVM-20N1A, 20N1E, 20NIU, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20NIU)	
NOTE 1:							
V901	Δ 8-736-135-05	PICTURE TUBE 20FZS (PVM-20N1A, 20N1E, 20NIU, 20N2A, 20N2E, 20N2U/SSM-20N1E, 20NIU)					
NOTE 1:							
V901	Δ 8-738-342-05	PICTURE TUBE 14MG (PVM-14N1A, 14N1E, 14N1MDE, 14NIU, 14N2A, 14N2E, 14N2U/SSM-14N1E, 14NIU)					

NOTE 1: V901 differs according to the serial No. described below.

- Serial No. 6000402 and Higher (PVM-14N1A)
- Serial No. 6005960 and Higher (PVM-14N1E)
- Serial No. 6000001 and Higher (PVM-14N1MDE)
- Serial No. 6006069 and Higher (PVM-14N1U)
- Serial No. 6000127 and Higher (PVM-14N2A)
- Serial No. 6003540 and Higher (PVM-14N2E)
- Serial No. 6003311 and Higher (PVM-14N2U)
- Serial No. 6003696 and Higher (SSM-14N1E)
- Serial No. 6004630 and Higher (SSM-14N1U)
- Serial No. 6000142 and Higher (PVM-20N1A)
- Serial No. 6001149 and Higher (PVM-20N1E)
- Serial No. 6002388 and Higher (PVM-20N1U)
- Serial No. 6000048 and Higher (PVM-20N2A)
- Serial No. 6000817 and Higher (PVM-20N2E)
- Serial No. 6001384 and Higher (PVM-20N2U)
- Serial No. 6001626 and Higher (SSM-20N1E)
- Serial No. 6001970 and Higher (SSM-20N1U)
