

SONY®

SDI/ANALOG MULTI INPUT ADAPTOR

BKM-61D

HD SDI/SDI INPUT ADAPTOR

BKM-62HS

ANALOG COMPONENT INPUT ADAPTOR

BKM-68X

SERVICE MANUAL

1st Edition

警告

このマニュアルは、サービス専用です。

お客様が、このマニュアルに記載された設置や保守、点検、修理などを行うと感電や火災、人身事故につながる可能性があります。

危険をさけるため、サービストレーニングを受けた技術者のみご使用ください。

WARNING

This manual is intended for qualified service personnel only.

To reduce the risk of electric shock, fire or injury, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. Refer all servicing to qualified service personnel.

WARNUNG

Die Anleitung ist nur für qualifiziertes Fachpersonal bestimmt.

Alle Wartungsarbeiten dürfen nur von qualifiziertem Fachpersonal ausgeführt werden. Um die Gefahr eines elektrischen Schlages, Feuergefahr und Verletzungen zu vermeiden, sind bei Wartungsarbeiten strikt die Angaben in der Anleitung zu befolgen. Andere als die angegeben Wartungsarbeiten dürfen nur von Personen ausgeführt werden, die eine spezielle Befähigung dazu besitzen.

AVERTISSEMENT

Ce manuel est destiné uniquement aux personnes compétentes en charge de l'entretien. Afin de réduire les risques de décharge électrique, d'incendie ou de blessure n'effectuer que les réparations indiquées dans le mode d'emploi à moins d'être qualifié pour en effectuer d'autres. Pour toute réparation faire appel à une personne compétente uniquement.

Table of Contents

1. Service Overview

1-1. Writing and Rewriting PLD Internal Data	1-1
--	-----

2. Circuit Adjustments

2-1. BKM-61D Circuit Adjustments	2-1
2-2. BKM-68X Circuit Adjustments	2-4

3. Semiconductor Pin Assignments

4. Spare Parts

4-1. Notes on Repair Parts	4-1
4-2. Exploded Views	4-2
4-3. Electrical Parts List	4-3

5. Block Diagrams

BD (1/3) (BKM-61D)	5-1
BD (2/3) (BKM-61D)	5-2
BD (3/3) (BKM-61D)	5-3
BHS (1/2) (BKM-62HS)	5-4
BHS (2/2) (BKM-62HS)	5-5
BX (1/2) (BKM-68X)	5-6
BX (2/2) (BKM-68X)	5-7

6. Schematic Diagrams

BD (1/8)(BKM-61D)	6-2
BD (2/8)(BKM-61D)	6-3
BD (3/8)(BKM-61D)	6-4
BD (4/8)(BKM-61D)	6-5
BD (5/8)(BKM-61D)	6-6
BD (6/8)(BKM-61D)	6-7
BD (7/8)(BKM-61D)	6-8
BD (8/8)(BKM-61D)	6-9
BHS (1/9)(BKM-62HS)	6-10
BHS (2/9)(BKM-62HS)	6-11
BHS (3/9)(BKM-62HS)	6-12
BHS (4/9)(BKM-62HS)	6-13
BHS (5/9)(BKM-62HS)	6-14
BHS (6/9)(BKM-62HS)	6-15
BHS (7/9)(BKM-62HS)	6-16
BHS (8/9)(BKM-62HS)	6-17
BHS (9/9)(BKM-62HS)	6-18
BX (1/8)(BKM-68X)	6-19
BX (2/8)(BKM-68X)	6-20
BX (3/8)(BKM-68X)	6-21
BX (4/8)(BKM-68X)	6-22
BX (5/8)(BKM-68X)	6-23
BX (6/8)(BKM-68X)	6-24
BX (7/8)(BKM-68X)	6-25
BX (8/8)(BKM-68X)	6-26

7. Board Layouts

BD	7-2
BHS	7-4
BX	7-6

Section 1

Service Overview

1-1. Writing and Rewriting PLD Internal Data

The BKM-61D/62HS/68X is equipped with a PLD (Programmable Logic Device) which can be written and rewritten using the e-Production (EPR) method. When replacing the following parts or upgrading the PLD version, contact your local Sony Sales Office/Service Center.

Note

The part number of the PLD (or the ROM for the PLD) presented in “Spare Parts” is that of the part with no data written.

When you need to replace any part, write data in the steps on the right.

For the PLD whose program operates on the externally connected ROM, when a part in the PLD is defective, if you replace only the defective part, you do not have to rewrite the data.

About e-Production

- When writing or rewriting the PLD internal data,
 1. standard tools (cables) can be used.
 2. standard software (PLD Download Tool) can be used.
- The PLD internal data is managed on the Sony database server as a Project file (E_XXX_XXX_XX_XX).
- Standard connector (EPR connector) for writing PLD internal data on the board is equipped. “EPR” is displayed on the board.

Corresponding PLDs:

Name of board PLD/ROM	EPR connector	Project file No.
BD		
IC520*1, IC904	CN900	E_000_002_87_02
BHS		
IC520*2, IC527*2, IC904	CN900	E_000_002_88_02
BX		
IC800*3, IC904	CN900	E_000_002_89_01

*1: IC520/BD is a ROM for IC800/BD.

*2: IC520, IC527/BHS is a ROM for IC300/BHS.

*3: IC800/BX is a ROM for IC806/BX.

Devices to be used

- PLD download tool (Sony part NO.: J-7120-140-A)
Cable to connect PC and the BKM-61D/62HS/68X.
- PC
The one with a parallel port
The one on which the PLD Download Tool is installed.
For the supported OS and operating environment, refer to “Download Tool Operating Instruction for Device Programming”.

Operation procedure

The procedure to write data to the PLD (or the ROM for the PLD) is outlined below.

For details on these steps, refer to “Download Tool Operating Instruction for Device Programming”.

“Download Tool Operating Instruction for Device Programming” can be obtained on the same Web site where the PLD Download Tool software is downloaded.

Step 1. Prepare the Project file.

Note

Download the Project file from the Sony database server.

Step 2. With the power of the monitor turned off, connect the parallel port on the PC and the EPR connector on the target board with the PLD download tool (cable).

Step 3. Turn on the power of the monitor.
Launch the PLD Download Tool software, and import the Project file.

Step 4. Program the PLD (or the ROM for the PLD) by using the PLD Download Tool software.

Step 5. When the programming completes correctly (without an error message), restart the monitor.

Note

When the target board is extended with the Z board (extension board), be sure to remove the four short pins of connector CN106 on the Z board to make it open. Otherwise, an error may occur while writing the data.

Connector CN106 on the Z board can also be used as the EPR connector.

Section 2

Circuit Adjustments

2-1. BKM-61D Circuit Adjustments

1. BD board adjustment (BKM-61D)

This section describes the following adjustments which are required when performing the maintenance and parts replacement of the BD board.

1. Digital freerun adjustment
2. SETUP level and 100PCT level adjustment

Control Settings

- Set as follows at the INPUT CONFIGURATION menu of the SETUP menu.

SLOT NO ... As desired

INPUT NO . DIGITAL1 or 2 when D1/D2 is input
COMPOSITE1/2/3 when composite is
input


Devices to be used

Name	Main Specifications	Model name
Signal generator	<ul style="list-style-type: none"> • D1/D2 SDI signal generator • Composite signal generator • YC signal generator 	
Frequency counter		


Tools

Name	Part No.	Remark
Extension board	A-1091-210-A	Z COMPL

Connection

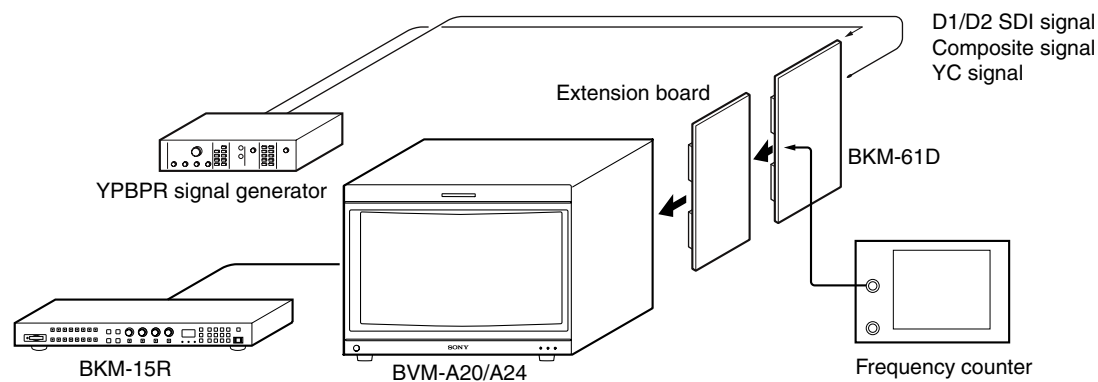

Adjustment parts layout

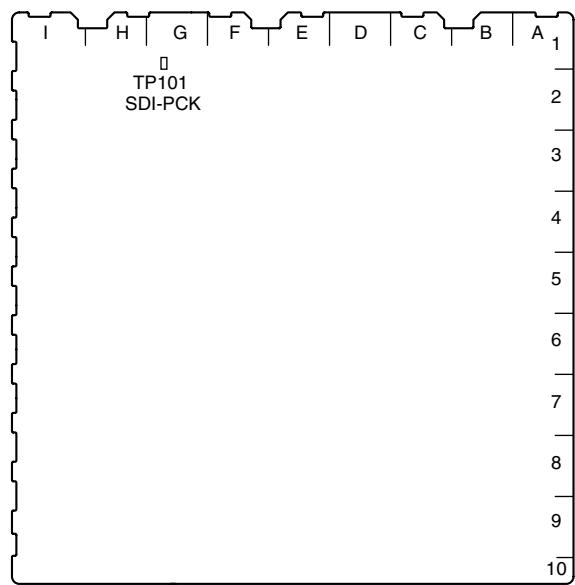

Procedure

1. Digital freerun adjustment

Adjustment Operation	Standard	Parts to adjust
Step 1		
<ul style="list-style-type: none">• Input no signal.• On the INPUT CONFIGURATION menu, set the D1 SDI mode.• Connect the frequency counter to TP101 (SDI PCK).	<p>Output waveform of TP101 (SDI PCK):</p> <p>27.0 ±0.15 MHz</p>	<p>The adjustment menu is D1 F0 at the level under the SYSTEM CONFIGURATION menu → MAINTENANCE menu → OPTION x BKM-61D (x : the slot No. where the board is inserted).</p>
Step 2		
<ul style="list-style-type: none">• On the INPUT CONFIGURATION menu, set the D2 NTSC mode.	<p>Output waveform of TP101 (SDI PCK):</p> <p>Standard : 14.32 ±0.15 MHz</p>	<p>The adjustment menu is D2N F0 at the level under the SYSTEM CONFIGURATION menu → MAINTENANCE menu → OPTION x BKM-61D (x : the slot No. where the board is inserted).</p>
Step 3		
<ul style="list-style-type: none">• On the INPUT CONFIGURATION menu, set the D2 PAL mode.	<p>Output waveform of TP101 (SDI PCK):</p> <p>Standard : 17.72 ±0.15 MHz</p>	<p>The adjustment menu is D2P F0 at the level under the SYSTEM CONFIGURATION menu → MAINTENANCE menu → OPTION x BKM-61D (x : the slot No. where the board is inserted).</p>

2. SETUP level and 100PCT level adjustment

- D2 SDI signal SETUP level and 100PCT level adjustment

1. Input the D2 NTSC (setup 0%) 100% 8-color bar signal to CN100.
2. On the INPUT CONFIGURATION menu, set the D2 NTSC setup 0% mode.
3. From MENU → PICTURE ADJUST → AUTO, select COLOR BAR of FULL FIELD8, and execute AUTO ADJUST.
4. Repeat steps 1 to 3 for the following signal formats and signal systems. (Be sure to change the input signal and the INPUT CONFIGURATION setting according to the signal format and the signal system.)

D2 NTSC (setup 7.5%)

D2 PAL

- Composite signal SETUP level and 100PCT level adjustment

1. Input the composite NTSC (setup 0%) 100% 8-color bar signal to CN200 (or CN300 or CN400).
- Note**
- Connect the 75 Ω terminator to the output terminal CN201 (or CN301 or CN401).
2. On the INPUT CONFIGURATION menu, set the Composite NTSC setup 0% mode.
 3. From MENU → PICTURE ADJUST → AUTO, select COLOR BAR of FULL FIELD8, and execute AUTO ADJUST.

Note

For the composite signal, adjust each one of the input terminals CN200, CN300, and CN400.

4. Repeat steps 1 to 3 for the following signal formats and signal systems. (Be sure to change the input signal and the INPUT CONFIGURATION setting according to the signal format and the signal system.)

Composite NTSC (setup 7.5%)

Composite PAL

Composite PAL-M

Composite SECAM

- YC signal SETUP level and 100PCT level adjustment

1. Input the YC NTSC (setup 0%) 100% 8-color bar signal to CN200 (Y) and CN300 (C).

Note

Connect the 75 Ω terminator to the output terminals CN201 (Y) and CN301 (C).

2. On the INPUT CONFIGURATION menu, set the YC NTSC setup 0% mode.
3. From MENU → PICTURE ADJUST → AUTO, select COLOR BAR of FULL FIELD8, and execute AUTO ADJUST.
4. Repeat steps 1 to 3 for the following signal formats and signal systems. (Be sure to change the input signal and the INPUT CONFIGURATION setting according to the signal format and the signal system.)

YC NTSC (setup 7.5%)

YC PAL

YC PAL-M

YC SECAM

2-2. BKM-68X Circuit Adjustments

1. BX board adjustment (BKM-68X)

This section describes the following adjustments which are required when performing the maintenance and parts replacement of the BX board.

- 1. SETUP level and 100PCT level adjustment

Control Settings

- Set as follows at the INPUT CONFIGURATION menu of the SETUP menu.
For component signal
FORMAT YPBPR
- For RGB signal
FORMAT RGB


Devices to be used

Name	Main Specifications			Model name
Signal generator	Format	System	Typical standard	
	Component	575/50i	EBU N10	
	RGB	480/59.94i	SMPTE 230M/251M/253M	
		575/50p	ITU-R BT.1358	
		480/59.95p	SMPTE 293M	
		1080/24PsF	SMPTE RP211	
		1080/50i	SMPTE 274M	
		1035/60i	BTA S-001B	
		1080/60i	SMPTE 274M	
		720/50p	SMPTE 296M	
		720/60p	SMPTE 296M	

Tools

Name	Part No.	Remark
Extension board	A-1091-210-A	Z COMPL

Connection

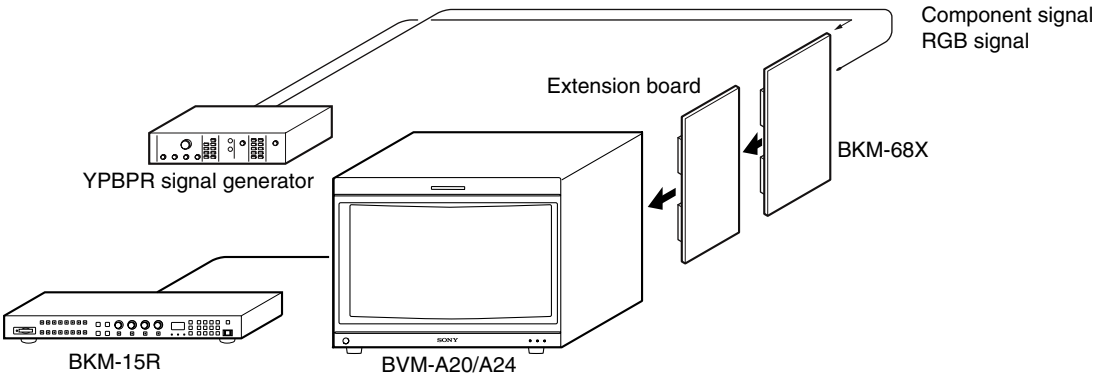

Procedure

1. SETUP level and 100PCT level adjustment

1. Input the 1080/60i component 8-color bar signal to the BNC input terminal.

Note

Connect the 75 Ω terminator to the BNC output terminal.

2. On the INPUT CONFIGURATION menu, set the YPBPR mode.
3. From MENU \rightarrow PICTURE ADJUST \rightarrow AUTO LEVEL ADJUST, select COLOR BAR of FULL FIELD8, and execute AUTO ADJUST.
4. Repeat steps 1 to 3 for the following signal formats and signal systems. (Be sure to change the input signal and the INPUT CONFIGURATION setting according to the signal format and the signal system.)

1080/60I RGB

1080/50I Component/RGB

1080/48I Component/RGB

720/60P Component/RGB

720/50P Component/RGB

480/59.94P Component/RGB

576/50P Component/RGB

480/59.94I Betacam 0% Component

480/59.94I Betacam 7.5% Component

480/59.94I N10/SMPTE Component

480/59.94I RGB

575/50I Component/RGB

Section 3

Semiconductor Pin Assignments

The following describes the semiconductor types used in this unit.

For semiconductors marked with page numbers in the index, refer to the corresponding pages in this section.

However, in some cases incompatible types are also listed, therefore, when a part is to be replaced, also refer to the Spare Parts section.

In addition, for semiconductors with ID Nos., refer to the separate CD-ROM titled “Semiconductor Pin Assignments” (Sony Part No. 9-968-546-xx) that allows searching for parts by semiconductor type or ID No.

The semiconductors in the manual or on the CD-ROM are listed by equivalent types. Thus the external view or the index mark indication may differ from the actual type.

Pin assignments and block diagrams are based on the IC manufacturer’s data book.

本機に使用されている半導体型名の一覧を下記に示します。索引中、ページが記載されている半導体は、本章の該当ページを参照してください。ただし、互換性のない型名を併記している場合がありますので、部品を交換するときは、Spare Partsの章を参照してください。

また、ID番号が記載されている半導体は、別途発行の“Semiconductor Pin Assignments” CD-ROM版 (ソニー部品番号：9-968-546-xx)を参照してください。

半導体型名またはID番号から検索ができます。

マニュアルまたはCD-ROMに掲載されている半導体は、それぞれの機能を等価的に表わしたものです。

外観やインデックスマークの表示方法が実物と異なる場合があります。

ピン配置およびブロック図はICメーカーのデータブックに従いました。

DIODE	Page or ID No.
1SS302	DC001-01
1SS302-TE85L	DC001-01
1SS357-TPH3	DC008-02

RB060L-40TE25	DC007-01
---------------------	----------

LED	Page or ID No.
CL-191YG-CD-T	LC004-01

TRANSISTOR	Page or ID No.
2SA1576A-T106-QR	TC001-01
2SA1610-T1Y34	TC001-01
2SA1610-Y33	TC001-01
2SC3356-R24	TC001-02
2SC4081-R	TC001-02
2SC4081T106R	TC001-02
2SC4176-B34	TC001-02
2SC4176T1B33B34B35	TC001-02
DTA123JUA-T106	TC001-04
DTA144EUA-T106	TC001-04
DTC123JUA-T106	TC001-03

IMT2AT108	TC006-01
IMX2	TC006-02

IC	Page or ID No.
BA25BC0FP-E2	BA18BC0FP-E2
BA25BC0FP-TE2	BA18BC0FP-E2
BA7046F	BA7046

CXA1521M	CXA1521M
CXA1521M-TH	CXA1521M
CXB1340N	CXB1340N
CXB1342R	CXB1342R
CXD2315Q	CXD2306Q

LM2990SX-5.0	UA7905UC
LM393PS	UA393DC

OPA2340EA/2K5-S	RC4558
-----------------------	--------

SN74AHCT04PWR	TC74HC04P
SN74LVC14APWR	TC74HC14P
SN74LVC541APWR	SN74LS541N

TC74HC4053AFT(EL)	MC74HC4053F
TC74VHC74FT(EL)	TC74HC74P
TC74VHCT04AFT(EL)	TC74HC04P
TC7SZ05FU(TE85R)	TC7SZ05FU_TE85R
TC7SZ125FU(TE85R)	NC7SZ125P5
TC7W53FU(TE12R)	TC4W53FU
TC7W53FU-TE12R	TC4W53FU
TC7WH125FU(TE12R)	TC7W125FU
TL082CPWR	RC4558
TL431CPK-E2	NJM431U
TLC2932IPWR	TLC2932IPW
TPS5120DBTR	TPS5120DBTR

Section 4

Spare Parts

4-1. Notes on Repair Parts

1. Safety Related Components Warning

WARNING

Components marked \triangle are critical to safe operation.
Therefore, specified parts should be used in the case of replacement.

WARNHINWEIS

Les composants identifiés par la marque \triangle sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.
Parts List has the present standardized repair parts.

3. Stock of Parts


Parts marked with “o” at SP (Supply Code) column of the Spare Parts list may not be stocked. Therefore, the delivery date will be delayed.
Items with no part number and no description are not stocked because they are seldom required for routine service.

4. Units for Capacitors, Inductors and Resistors

The following units are assumed in Schematic Diagrams, Electrical Parts List and Exploded Views unless otherwise specified.

Capacitors	: μF
Inductors	: μH
Resistors	: Ω

4-2. Exploded Views

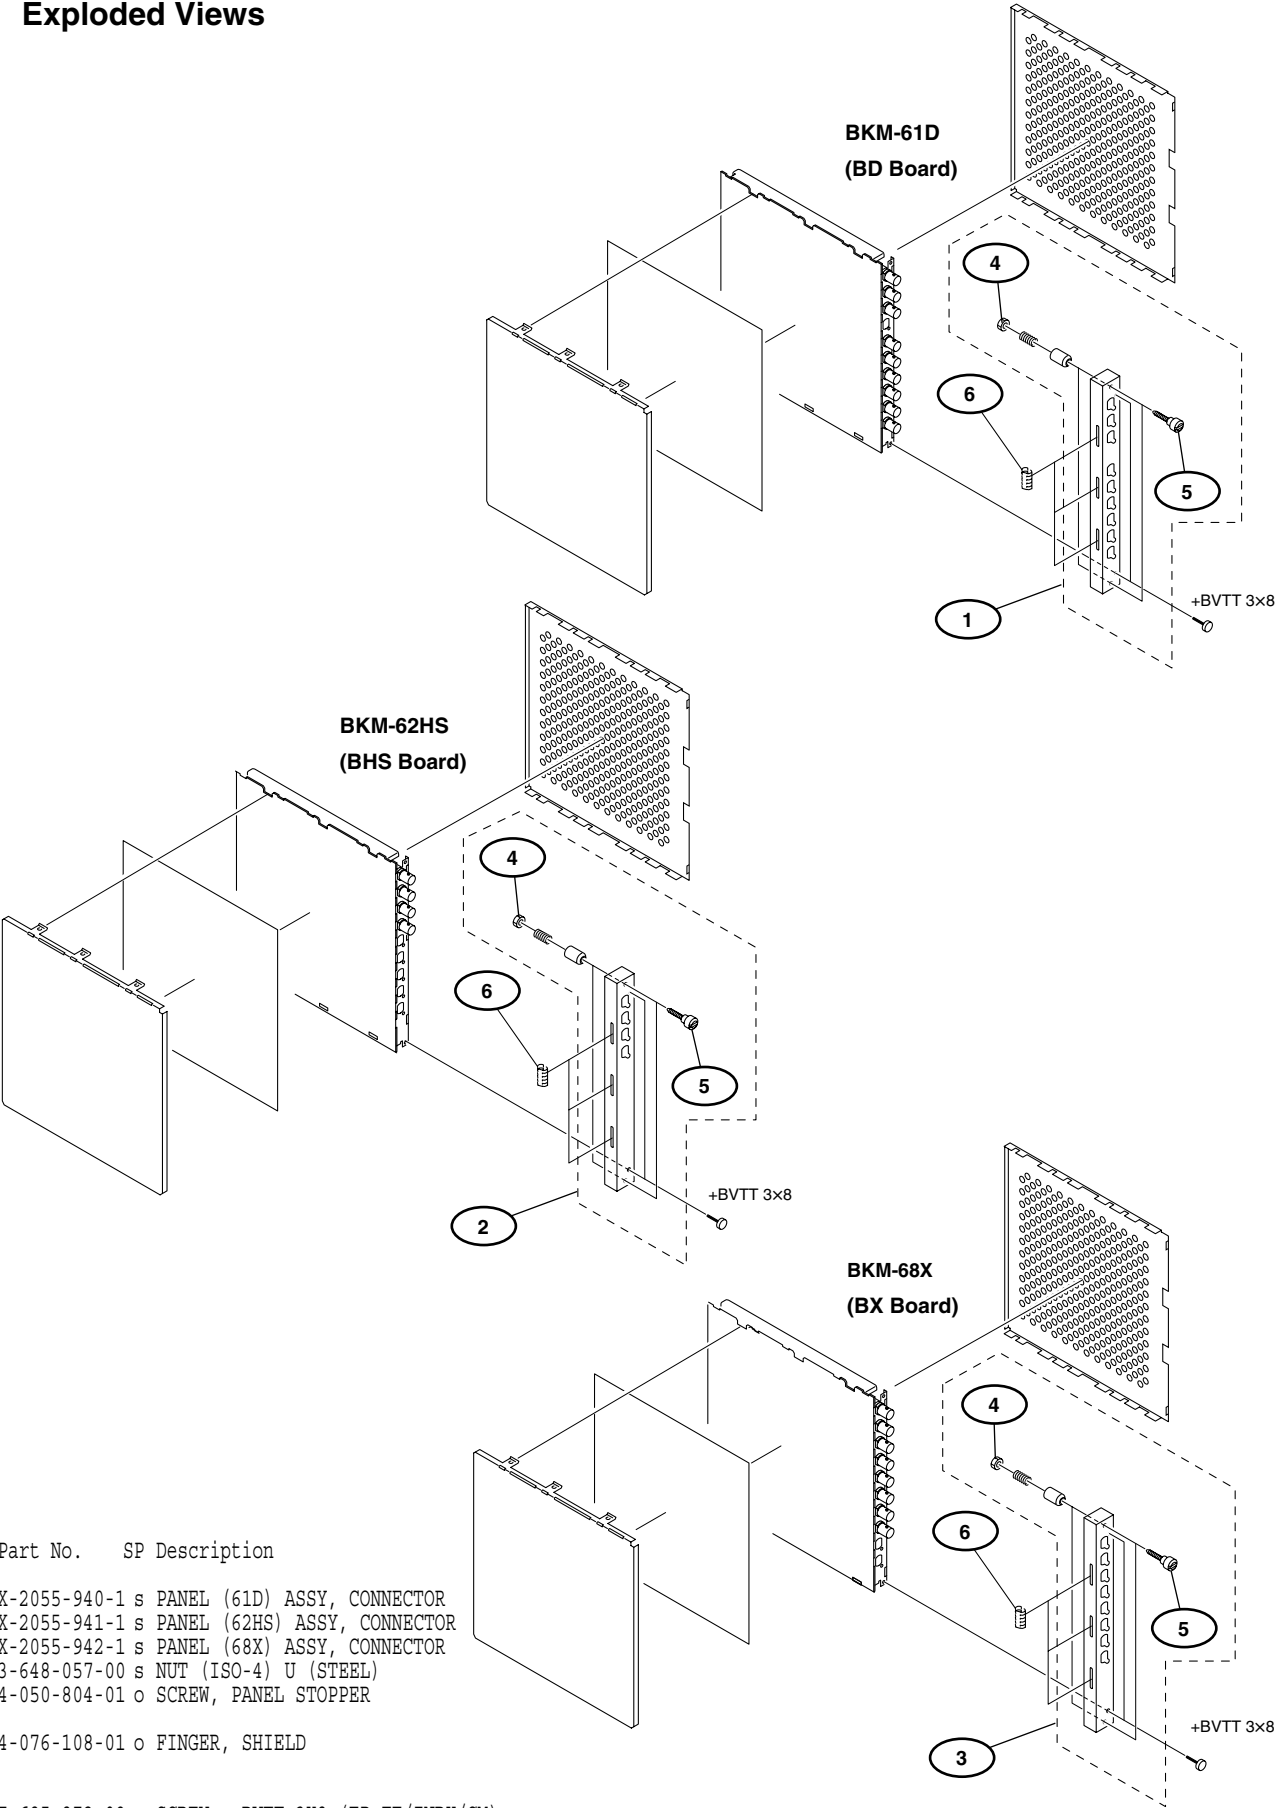

No.	Part No.	SP Description
1	X-2055-940-1 s	PANEL (61D) ASSY, CONNECTOR
2	X-2055-941-1 s	PANEL (62HS) ASSY, CONNECTOR
3	X-2055-942-1 s	PANEL (68X) ASSY, CONNECTOR
4	3-648-057-00 s	NUT (ISO-4) U (STEEL)
5	4-050-804-01 o	SCREW, PANEL STOPPER
6	4-076-108-01 o	FINGER, SHIELD
	7-685-872-09 s	SCREW, +BVTT 3X8 (EP-FE/ZNBK/CM)

4-3. Electrical Parts List

BD BOARD (BKM-61D)

Ref. No. or Q'ty	Part No.	SP Description
C100	1-165-908-91	s CAP, CERAMIC 1000000PF B 1608
C101	1-165-908-91	s CAP, CERAMIC 1000000PF B 1608
C102	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C103	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C104	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C105	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C106	1-162-923-91	s CAP, CERAMIC 47PF CH 1608
C107	1-165-908-91	s CAP, CERAMIC 1000000PF B 1608
C108	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C109	1-126-405-21	s CAP, CHIP ELECT 10MF (6.3X5.7)
C111	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C112	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C114	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C115	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C116	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C117	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C118	1-126-405-21	s CAP, CHIP ELECT 10MF (6.3X5.7)
C119	1-162-923-91	s CAP, CERAMIC 47PF CH 1608
C120	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C121	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C122	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C123	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C124	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C125	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C126	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C127	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C128	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C129	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C130	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C131	1-162-915-91	s CAP, CERAMIC 10PF CH 1608
C132	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C133	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C134	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C135	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C136	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C137	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C138	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C139	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C140	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C141	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C142	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C143	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C144	1-125-889-91	s CAP, CHIP CERAMIC 2.2MF B 2012
C145	1-126-391-21	s CAP, CHIP ELECT 47MF (5X5.7)
C146	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C147	1-125-889-91	s CAP, CHIP CERAMIC 2.2MF B 2012
C148	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C149	1-128-361-21	s CAP, CHIP CELECT 470MF
C150	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C151	1-100-026-11	s CAP, ELECT 220MF (8X6.9)
C152	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C153	1-100-026-11	s CAP, ELECT 220MF (8X6.9)
C154	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C155	1-100-026-11	s CAP, ELECT 220MF (8X6.9)
C156	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C157	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C159	1-162-927-91	s CAP, CERAMIC 100PF CH 1608
C170	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C171	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608

(BD BOARD (BKM-61D))

Ref. No. or Q'ty	Part No.	SP Description
C172	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C173	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C174	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C175	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C176	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C177	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C178	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C179	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C180	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C181	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C182	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C183	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C184	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C200	1-162-914-91	s CAP, CERAMIC 9.0PF CH 1608
C201	1-162-914-91	s CAP, CERAMIC 9.0PF CH 1608
C202	1-113-701-21	s CAP, ELECT (NONPOLAR) 22MF
C203	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C204	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C205	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C206	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C207	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C208	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C209	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C210	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C211	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C213	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C214	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C215	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C216	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C217	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C218	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C219	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C240	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C241	1-125-837-91	s CAP, CHIP CERAMIC 1MF B (1608)
C242	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C243	1-128-361-21	s CAP, CHIP CELECT 470MF
C244	1-128-361-21	s CAP, CHIP CELECT 470MF
C245	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C246	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C247	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C248	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C249	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C250	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C251	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C252	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C253	1-135-341-21	s CAP, ELECT 330MF (10X8)
C254	1-135-341-21	s CAP, ELECT 330MF (10X8)
C255	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C256	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C259	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C260	1-125-837-91	s CAP, CHIP CERAMIC 1MF B (1608)
C261	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C262	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C263	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C264	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C265	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C269	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C270	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C271	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608

(BD BOARD (BKM-61D))

Ref. No. or Q'ty	Part No.	SP Description
C272	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C274	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C275	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C276	1-162-919-91	s CAP, CERAMIC 22PF CH 1608
C277	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C278	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C279	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C280	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C300	1-162-914-91	s CAP, CERAMIC 9.0PF CH 1608
C301	1-162-914-91	s CAP, CERAMIC 9.0PF CH 1608
C302	1-113-701-21	s CAP, ELECT (NONPOLAR) 22MF
C303	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C304	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C305	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C306	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C307	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C308	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C309	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C311	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C312	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C313	1-126-392-21	s CAP, CHIP ELECT 100MF (6.3X5.7)
C314	1-126-392-21	s CAP, CHIP ELECT 100MF (6.3X5.7)
C340	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C341	1-125-837-91	s CAP, CHIP CERAMIC 1MF B (1608)
C342	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C343	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C344	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C345	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C346	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C347	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C348	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C400	1-162-914-91	s CAP, CERAMIC 9.0PF CH 1608
C401	1-162-914-91	s CAP, CERAMIC 9.0PF CH 1608
C402	1-113-701-21	s CAP, ELECT (NONPOLAR) 22MF
C403	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C404	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C405	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C406	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C407	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C408	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C409	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C410	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C411	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C413	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C414	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C415	1-126-392-21	s CAP, CHIP ELECT 100MF (6.3X5.7)
C416	1-126-392-21	s CAP, CHIP ELECT 100MF (6.3X5.7)
C440	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C441	1-125-837-91	s CAP, CHIP CERAMIC 1MF B (1608)
C442	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C443	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C444	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C445	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C446	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C447	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C448	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C500	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C501	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C502	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608

(BD BOARD (BKM-61D))

Ref. No. or Q'ty	Part No.	SP Description
C503	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C504	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C505	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C506	1-162-966-91	s CAP, CERAMIC 2200PF B 1608
C507	1-126-193-21	s CAP, ELECT 1.0MF (4.3X5.5)
C508	1-127-804-91	s CAP, CERAMIC 100PF CH (1608)
C509	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C510	1-126-206-21	s CAP, ELECT 100MF (6.6X5.5)
C511	1-126-193-21	s CAP, ELECT 1.0MF (4.3X5.5)
C512	1-162-964-91	s CAP, CHIP CERAMIC 1000PF B 1608
C520	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C521	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C522	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C523	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C525	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C526	1-162-925-91	s CAP, CERAMIC 68PF CH 1608
C527	1-164-315-91	s CAP, CERAMIC 470PF CH (1608)
C528	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C529	1-162-923-91	s CAP, CERAMIC 47PF CH 1608
C530	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C531	1-125-838-91	s CAP, CHIP CERAMIC 2.2MF B (2012)
C532	1-164-245-91	s CAP, CERAMIC 15000PF B 1608
C533	1-162-966-91	s CAP, CERAMIC 2200PF B 1608
C534	1-162-966-91	s CAP, CERAMIC 2200PF B 1608
C535	1-162-925-91	s CAP, CERAMIC 68PF CH 1608
C536	1-164-315-91	s CAP, CERAMIC 470PF CH (1608)
C537	1-164-315-91	s CAP, CERAMIC 470PF CH (1608)
C538	1-162-966-91	s CAP, CERAMIC 2200PF B 1608
C539	1-162-968-91	s CAP, CHIP CERAMIC 4700PF B 1608
C540	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C541	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C542	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C543	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C544	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C545	1-135-960-91	s CAP, CHIP CERAMIC 10MF B (3225)
C546	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C547	1-127-820-91	s CAP, CHIP CERAMIC 4.7MF B 3216
C548	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C549	1-135-344-21	s CAP, ELECT 270MF (10X8)
C550	1-135-960-91	s CAP, CHIP CERAMIC 10MF B (3225)
C551	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C552	1-135-960-91	s CAP, CHIP CERAMIC 10MF B (3225)
C553	1-135-344-21	s CAP, ELECT 270MF (10X8)
C554	1-165-667-21	s CAP, ELECT 100MF
C555	1-126-392-21	s CAP, CHIP ELECT 100MF (6.3X5.7)
C556	1-165-668-21	s CAP, ELECT 150MF
C558	1-135-344-21	s CAP, ELECT 270MF (10X8)
C559	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C561	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C562	1-135-341-21	s CAP, ELECT 330MF (10X8)
C563	1-135-341-21	s CAP, ELECT 330MF (10X8)
C564	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C565	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C566	1-126-401-21	s CAP, CHIP ELECT 1MF (4X5.7)
C567	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C568	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C569	1-126-392-21	s CAP, CHIP ELECT 100MF (6.3X5.7)
C570	1-126-405-21	s CAP, CHIP ELECT 10MF (6.3X5.7)
C571	1-162-970-91	s CAP, CERAMIC 10000PF B 1608

(BD BOARD (BKM-61D))

Ref. No. or Q'ty	Part No.	SP	Description
C572	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C573	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C574	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C600	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C601	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C602	1-128-361-21	s	CAP, CHIP CELECT 470MF
C603	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C604	1-128-361-21	s	CAP, CHIP CELECT 470MF
C605	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C607	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C609	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C610	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C611	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C612	1-100-756-91	s	CAP,CHIPCERAMIC 47000PF B 1608
C613	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C614	1-100-756-91	s	CAP,CHIPCERAMIC 47000PF B 1608
C615	1-135-341-21	s	CAP, ELECT 330MF (10X8)
C616	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C617	1-135-341-21	s	CAP, ELECT 330MF (10X8)
C618	1-100-756-91	s	CAP,CHIPCERAMIC 47000PF B 1608
C619	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C620	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C621	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C622	1-100-756-91	s	CAP,CHIPCERAMIC 47000PF B 1608
C623	1-135-341-21	s	CAP, ELECT 330MF (10X8)
C624	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C625	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C626	1-135-341-21	s	CAP, ELECT 330MF (10X8)
C627	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C628	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C629	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C630	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C631	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C632	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C633	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C634	1-125-817-91	s	CAP, CERAMIC 10MF B (3216)
C635	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C636	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C637	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C638	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C639	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C640	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C641	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C642	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C643	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C645	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C646	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C647	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C648	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C649	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C650	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C651	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C652	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C654	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C655	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C656	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C657	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C658	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C659	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)

(BD BOARD (BKM-61D))

Ref. No. or Q'ty	Part No.	SP	Description
C660	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C661	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C662	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C663	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C664	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C665	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C666	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C667	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C668	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C669	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C670	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C671	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C672	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C673	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C674	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C675	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C676	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C677	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C678	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C679	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C680	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C681	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C682	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C683	1-162-915-91	s	CAP, CERAMIC 10PF CH 1608
C685	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C686	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C688	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C690	1-164-230-91	s	CAP,CERAMIC 220PF CH 1608
C691	1-164-390-91	s	CAP, CERAMIC 330PF CH 1608
C692	1-162-927-91	s	CAP, CERAMIC 100PF CH 1608
C693	1-100-756-91	s	CAP,CHIPCERAMIC 47000PF B 1608
C694	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C695	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C696	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C697	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C699	1-164-217-91	s	CAP,CERAMIC 150PF CH 1608
C700	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C701	1-100-756-91	s	CAP,CHIPCERAMIC 47000PF B 1608
C702	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C703	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C704	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C705	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C706	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C707	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C708	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C709	1-126-391-21	s	CAP, CHIP ELECT 47MF (5X5.7)
C710	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C711	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C712	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C750	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C751	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C752	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C753	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C754	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C755	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C756	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C757	1-164-388-91	s	CAP, CERAMIC 270PF CH 1608
C758	1-162-920-91	s	CAP, CERAMIC 27PF CH 1608
C759	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608

(BD BOARD (BKM-61D))

Ref. No. or Q'ty	Part No.	SP Description
C760	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C761	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C762	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C763	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C800	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C801	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C802	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C803	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C804	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C805	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C806	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C807	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C808	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C809	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C810	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C811	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C812	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C813	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C814	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C815	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C816	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C817	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C818	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C819	1-100-597-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C820	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C821	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C822	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C823	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C824	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C900	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C901	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C902	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C903	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C904	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C905	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C906	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C907	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C908	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C909	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C910	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C911	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C912	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C913	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C914	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C915	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C916	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C917	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C918	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C919	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C920	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C921	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C922	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C923	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C924	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C925	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C926	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C927	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C928	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C929	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608

(BD BOARD (BKM-61D))

Ref. No. or Q'ty	Part No.	SP Description
C930	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C931	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C933	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C934	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
CN100	1-793-324-11	o CONNECTOR, COAXIAL (BNC TYPE)
CN101	1-793-324-11	o CONNECTOR, COAXIAL (BNC TYPE)
CN102	1-793-324-11	o CONNECTOR, COAXIAL (BNC TYPE)
CN170	1-817-753-11	o CONNECTOR, BOARD TO BOARD 100P
CN171	1-817-753-11	o CONNECTOR, BOARD TO BOARD 100P
CN172	1-695-207-21	o PIN, AONNECTOR (PC BOARD) 6P
CN173	1-695-207-21	o PIN, AONNECTOR (PC BOARD) 6P
CN174	1-695-208-21	o PIN, CONNECTOR (PC BOARD) 7P
CN175	1-695-208-21	o PIN, CONNECTOR (PC BOARD) 7P
CN200	1-793-324-11	o CONNECTOR, COAXIAL (BNC TYPE)
CN201	1-793-324-11	o CONNECTOR, COAXIAL (BNC TYPE)
CN300	1-793-324-11	o CONNECTOR, COAXIAL (BNC TYPE)
CN301	1-793-324-11	o CONNECTOR, COAXIAL (BNC TYPE)
CN400	1-793-324-11	o CONNECTOR, COAXIAL (BNC TYPE)
CN401	1-793-324-11	o CONNECTOR, COAXIAL (BNC TYPE)
CN900	1-764-080-21	o PIN, CONNECTOR (PC BOARD) 8P
D101	8-719-404-50	s DIODE MA111-TX
D200	8-719-820-42	s DIODE 1SS302-TE85L
D240	8-719-404-50	s DIODE MA111-TX
D241	8-719-404-50	s DIODE MA111-TX
D300	8-719-820-42	s DIODE 1SS302-TE85L
D400	8-719-820-42	s DIODE 1SS302-TE85L
D520	8-719-064-52	s DIODE CL-191YG-CD-T
D521	8-719-027-76	s DIODE 1SS357-TPH3
D522	8-719-027-76	s DIODE 1SS357-TPH3
D523	8-719-073-92	s DIODE RB060L-40TE25
D524	8-719-073-92	s DIODE RB060L-40TE25
D525	8-719-404-50	s DIODE MA111-TX
D526	8-719-404-50	s DIODE MA111-TX
D527	8-719-064-52	s DIODE CL-191YG-CD-T
D528	8-719-404-50	s DIODE MA111-TX
D600	8-719-404-50	s DIODE MA111-TX
D601	8-719-404-50	s DIODE MA111-TX
D603	8-719-404-50	s DIODE MA111-TX
D604	8-719-404-50	s DIODE MA111-TX
D900	8-719-064-52	s DIODE CL-191YG-CD-T
D901	8-719-404-50	s DIODE MA111-TX
F520	1-533-999-21	s FUSE, (SMD) (2A/125V)
F521	1-533-999-21	s FUSE, (SMD) (2A/125V)
F522	1-533-999-21	s FUSE, (SMD) (2A/125V)
FB100	1-469-379-21	s FERRITE, EMI (SMD) (2012)
FB101	1-469-379-21	s FERRITE, EMI (SMD) (2012)
FB102	1-469-379-21	s FERRITE, EMI (SMD) (2012)
FB103	1-469-379-21	s FERRITE, EMI (SMD) (2012)
FB240	1-469-379-21	s FERRITE, EMI (SMD) (2012)
FB241	1-469-379-21	s FERRITE, EMI (SMD) (2012)
FB340	1-469-379-21	s FERRITE, EMI (SMD) (2012)
FB440	1-469-379-21	s FERRITE, EMI (SMD) (2012)
FB600	1-469-379-21	s FERRITE, EMI (SMD) (2012)
FB601	1-469-379-21	s FERRITE, EMI (SMD) (2012)
FB602	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB603	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB604	1-469-379-21	s FERRITE, EMI (SMD) (2012)

(BD BOARD (BKM-61D))

Ref. No. or Q'ty	Part No.	SP	Description
FB605	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB607	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB750	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FL170	1-234-926-11	s	LOW PASS FILTER
FL171	1-234-925-11	s	LOW PASS FILTER
FL172	1-234-926-11	s	LOW PASS FILTER
FL173	1-234-493-21	s	FILTER, EMI
FL200	1-239-289-21	s	FILTER, LOW PASS
FL300	1-239-289-21	s	FILTER, LOW PASS
FL400	1-239-289-21	s	FILTER, LOW PASS
IC100	8-752-080-61	s	IC CXB1340N
IC102	8-752-078-34	s	IC CXB1342R
IC103	8-759-687-37	s	IC OPA2340EA/2K5-S
IC104	6-705-403-01	s	IC PQ070XZ01ZPH
IC105	6-708-748-01	s	IC BD4828FVE-TR
IC170	6-706-773-01	s	IC AD8075ARUZ-REEL7
IC171	8-759-497-44	s	IC TC7WH125FU (TE12R)
IC200	8-759-564-49	s	IC TC7W53FU (TE12R)
IC201	8-759-564-49	s	IC TC7W53FU (TE12R)
IC240	8-752-375-98	s	IC CXD2315Q
IC241	6-705-469-01	s	IC BA50BC0FP-E2
IC242	8-759-539-89	s	IC LM2990SX-5.0
IC243	8-759-183-53	s	IC TL431CPK-E2
IC244	8-752-375-98	s	IC CXD2315Q
IC245	8-759-573-91	s	IC AD8055ARTZ-REEL7
IC246	8-759-573-91	s	IC AD8055ARTZ-REEL7
IC247	8-759-573-91	s	IC AD8055ARTZ-REEL7
IC248	8-759-573-91	s	IC AD8055ARTZ-REEL7
IC300	8-759-564-49	s	IC TC7W53FU (TE12R)
IC301	8-759-564-49	s	IC TC7W53FU (TE12R)
IC340	8-752-375-98	s	IC CXD2315Q
IC400	8-759-564-49	s	IC TC7W53FU (TE12R)
IC401	8-759-564-49	s	IC TC7W53FU (TE12R)
IC402	8-759-564-49	s	IC TC7W53FU (TE12R)
IC440	8-752-375-98	s	IC CXD2315Q
IC501	8-759-292-55	s	IC BA7046F-E2
IC521	6-706-488-01	s	IC TC7SH14FU (T5RSOYJF)
IC522	6-708-748-01	s	IC BD4828FVE-TR
IC523	6-702-510-01	s	IC TPS5120DBTRG4
IC524	6-704-006-01	s	IC BR24L64F-WE2
IC525	6-700-394-01	s	IC BA25BC0FP-E2
IC600	6-705-468-01	s	IC BA33BC0FP-E2
IC601	6-708-748-01	s	IC BD4828FVE-TR
IC602	6-708-748-01	s	IC BD4828FVE-TR
IC603	6-705-468-01	s	IC BA33BC0FP-E2
IC604	6-706-488-01	s	IC TC7SH14FU (T5RSOYJF)
IC605	6-706-488-01	s	IC TC7SH14FU (T5RSOYJF)
IC606	6-705-403-01	s	IC PQ070XZ01ZPH
IC607	6-705-403-01	s	IC PQ070XZ01ZPH
IC608	6-706-489-01	s	IC TC7SH32FU (T5RSOYJF)
IC609	6-707-722-01	s	IC UPD64011BGM-8ED-A
IC611	6-703-791-01	s	IC MSM56V16160F-8T3FM1
IC750	8-752-375-98	s	IC CXD2315Q
IC751	8-759-183-53	s	IC TL431CPK-E2
IC900	6-708-748-01	s	IC BD4828FVE-TR
IC901	8-759-679-54	s	IC SN74LVC14APWR
IC902	6-705-468-01	s	IC BA33BC0FP-E2
IC903	6-706-489-01	s	IC TC7SH32FU (T5RSOYJF)

(BD BOARD (BKM-61D))

Ref. No. or Q'ty	Part No.	SP	Description
IC904	6-709-436-01	s	IC LC4128V-5TN100CA1353
IC905	8-759-679-54	s	IC SN74LVC14APWR
IC906	8-759-679-54	s	IC SN74LVC14APWR
IC907	8-759-573-97	s	IC SN74LVC541APWR
IC908	8-759-679-54	s	IC SN74LVC14APWR
IC909	8-759-592-49	s	IC TC7SZ125FU (TE85R)
IC910	6-706-489-01	s	IC TC7SH32FU (T5RSOYJF)
IC911	6-705-027-01	s	IC BD4840FVE-TR
IC912	8-759-592-46	s	IC TC7SZ05FU (TE85R)
IC913	6-706-489-01	s	IC TC7SH32FU (T5RSOYJF)
L100	1-414-453-21	s	INDUCTOR, CHIP (S) 1.5NH
L101	1-414-466-41	s	INDUCTOR, CHIP (J) 18NH
L102	1-414-468-41	s	INDUCTOR, CHIP (J) 27NH
L103	1-414-464-41	s	INDUCTOR, CHIP (J) 12NH
L104	1-414-467-41	s	INDUCTOR, CHIP (J) 22NH
L105	1-416-345-21	s	COIL, CHOKE 22UH
L106	1-416-345-21	s	COIL, CHOKE 22UH
L200	1-414-578-41	s	INDUCTOR, CHIP (J) 68NH
L201	1-414-576-41	s	INDUCTOR, CHIP (J) 47NH
L300	1-414-578-41	s	INDUCTOR, CHIP (J) 68NH
L301	1-414-576-41	s	INDUCTOR, CHIP (J) 47NH
L400	1-414-578-41	s	INDUCTOR, CHIP (J) 68NH
L401	1-414-576-41	s	INDUCTOR, CHIP (J) 47NH
L520	1-469-848-21	s	INDUCTOR (SMD)
L521	1-469-848-21	s	INDUCTOR (SMD)
L522	1-469-848-21	s	INDUCTOR (SMD)
L523	1-469-848-21	s	INDUCTOR (SMD)
L524	1-469-848-21	s	INDUCTOR (SMD)
L525	1-416-345-21	s	COIL, CHOKE 22UH
L526	1-412-955-21	s	INDUCTOR, SMALL TYPE 22UH 2520
L600	1-416-345-21	s	COIL, CHOKE 22UH
L601	1-416-345-21	s	COIL, CHOKE 22UH
L602	1-414-195-41	s	INDUCTOR, CHIP 39UH
L603	1-412-008-41	s	CHIP INDUCTOR 15UH
L604	1-416-345-21	s	COIL, CHOKE 22UH
L605	1-416-345-21	s	COIL, CHOKE 22UH
L900	1-412-955-21	s	INDUCTOR, SMALL TYPE 22UH 2520
PS170	1-576-124-21	s	LINK, IC (1A/72V)
PS171	1-576-124-21	s	LINK, IC (1A/72V)
PS172	1-576-677-21	s	RINK, IC (4A/72V)
PS173	1-576-677-21	s	RINK, IC (4A/72V)
PS174	1-576-677-21	s	RINK, IC (4A/72V)
Q100	8-729-028-81	s	TRANSISTOR DTA123JUA-T106
Q101	8-729-143-47	s	TRANSISTOR 2SC3356-T1R24
Q102	8-729-026-53	s	TRANSISTOR 2SA1576A-T106-QR
Q103	8-729-143-47	s	TRANSISTOR 2SC3356-T1R24
Q104	8-729-028-81	s	TRANSISTOR DTA123JUA-T106
Q200	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q201	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q202	8-729-026-53	s	TRANSISTOR 2SA1576A-T106-QR
Q203	8-729-144-81	s	TRANSISTOR 2SC4176T1B3B34B35
Q204	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q205	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q300	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q301	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q302	8-729-026-53	s	TRANSISTOR 2SA1576A-T106-QR
Q303	8-729-144-81	s	TRANSISTOR 2SC4176T1B3B34B35
Q304	8-729-905-38	s	TRANSISTOR 2SC4081T106R

(BD BOARD (BKM-61D))

Ref. No. or Q'ty	Part No.	SP Description
Q340	8-729-026-53	s TRANSISTOR 2SA1576A-T106-QR
Q341	8-729-905-38	s TRANSISTOR 2SC4081T106R
Q342	8-729-905-38	s TRANSISTOR 2SC4081T106R
Q400	8-729-905-38	s TRANSISTOR 2SC4081T106R
Q401	8-729-905-38	s TRANSISTOR 2SC4081T106R
Q402	8-729-026-53	s TRANSISTOR 2SA1576A-T106-QR
Q403	8-729-144-81	s TRANSISTOR 2SC4176T1B33B34B35
Q404	8-729-905-38	s TRANSISTOR 2SC4081T106R
Q440	8-729-026-53	s TRANSISTOR 2SA1576A-T106-QR
Q441	8-729-905-38	s TRANSISTOR 2SC4081T106R
Q442	8-729-905-38	s TRANSISTOR 2SC4081T106R
Q500	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q501	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q502	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q503	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q504	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q505	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q506	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q507	8-729-905-38	s TRANSISTOR 2SC4081T106R
Q520	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q521	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q522	6-550-374-01	s TRANSISTOR TPC8009-H (T2LSONYF
Q524	6-550-374-01	s TRANSISTOR TPC8009-H (T2LSONYF
Q526	6-550-374-01	s TRANSISTOR TPC8009-H (T2LSONYF
Q528	6-550-374-01	s TRANSISTOR TPC8009-H (T2LSONYF
Q530	8-729-026-53	s TRANSISTOR 2SA1576A-T106-QR
Q531	8-729-028-81	s TRANSISTOR DTA123JUA-T106
Q532	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q533	8-729-028-81	s TRANSISTOR DTA123JUA-T106
Q534	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q600	8-729-026-53	s TRANSISTOR 2SA1576A-T106-QR
Q601	8-729-026-53	s TRANSISTOR 2SA1576A-T106-QR
Q750	8-729-026-53	s TRANSISTOR 2SA1576A-T106-QR
Q751	8-729-905-38	s TRANSISTOR 2SC4081T106R
Q752	8-729-905-38	s TRANSISTOR 2SC4081T106R
R100	1-211-990-91	s RES, CHIP 75 (1608)
R101	1-216-833-91	s RES, CHIP 10K (1608)
R102	1-211-990-91	s RES, CHIP 75 (1608)
R103	1-216-830-91	s RES, CHIP 5.6K (1608)
R104	1-216-804-91	s RES, CHIP 39 (1608)
R105	1-216-842-91	s RES, CHIP 56K (1608)
R106	1-218-285-91	s RES, CHIP 75 (1608)
R108	1-216-821-91	s RES, CHIP 1.0K (1608)
R109	1-216-804-91	s RES, CHIP 39 (1608)
R110	1-216-817-91	s RES, CHIP 470 (1608)
R111	1-216-847-91	s RES, CHIP 150K (1608)
R112	1-216-817-91	s RES, CHIP 470 (1608)
R113	1-211-990-91	s RES, CHIP 75 (1608)
R114	1-211-990-91	s RES, CHIP 75 (1608)
R115	1-218-824-91	s RES, CHIP 110 (1608)
R116	1-218-835-91	s RES, CHIP 330 (1608)
R117	1-218-835-91	s RES, CHIP 330 (1608)
R118	1-216-832-91	s RES, CHIP 8.2K (1608)
R119	1-216-814-91	s RES, CHIP 270 (1608)
R120	1-216-826-91	s RES, CHIP 2.7K (1608)
R121	1-216-826-91	s RES, CHIP 2.7K (1608)
R122	1-218-852-91	s RES, CHIP 1.6K (1608)
R123	1-216-826-91	s RES, CHIP 2.7K (1608)
R124	1-218-875-91	s RES, CHIP 15K (1608)

(BD BOARD (BKM-61D))

Ref. No. or Q'ty	Part No.	SP Description
R125	1-216-829-91	s RES, CHIP 4.7K (1608)
R126	1-216-829-91	s RES, CHIP 4.7K (1608)
R127	1-216-817-91	s RES, CHIP 470 (1608)
R128	1-216-817-91	s RES, CHIP 470 (1608)
R129	1-216-817-91	s RES, CHIP 470 (1608)
R130	1-211-991-91	s RES, CHIP 82 (1608)
R131	1-211-990-91	s RES, CHIP 75 (1608)
R132	1-211-977-91	s RES, CHIP 22 (1608)
R133	1-211-979-91	s RES, CHIP 27 (1608)
R134	1-211-990-91	s RES, CHIP 75 (1608)
R135	1-211-977-91	s RES, CHIP 22 (1608)
R136	1-216-808-91	s RES, CHIP 82 (1608)
R137	1-216-821-91	s RES, CHIP 1.0K (1608)
R138	1-218-857-91	s RES, CHIP 2.7K (1608)
R139	1-216-821-91	s RES, CHIP 1.0K (1608)
R142	1-216-864-91	s CONDUCTOR, CHIP (1608)
R143	1-216-864-91	s CONDUCTOR, CHIP (1608)
R146	1-216-864-91	s CONDUCTOR, CHIP (1608)
R147	1-216-864-91	s CONDUCTOR, CHIP (1608)
R148	1-216-864-91	s CONDUCTOR, CHIP (1608)
R149	1-216-841-91	s RES, CHIP 47K (1608)
R150	1-218-879-91	s RES, CHIP 22K (1608)
R151	1-216-841-91	s RES, CHIP 47K (1608)
R152	1-218-851-91	s RES, CHIP 1.5K (1608)
R153	1-218-846-91	s RES, CHIP 910 (1608)
R154	1-216-829-91	s RES, CHIP 4.7K (1608)
R156	1-216-864-91	s CONDUCTOR, CHIP (1608)
R170	1-218-827-91	s RES, CHIP 150 (1608)
R171	1-218-827-91	s RES, CHIP 150 (1608)
R172	1-218-827-91	s RES, CHIP 150 (1608)
R173	1-218-827-91	s RES, CHIP 150 (1608)
R174	1-218-829-91	s RES, CHIP 180 (1608)
R175	1-218-827-91	s RES, CHIP 150 (1608)
R176	1-216-809-91	s RES, CHIP 100 (1608)
R177	1-216-809-91	s RES, CHIP 100 (1608)
R178	1-216-809-91	s RES, CHIP 100 (1608)
R179	1-218-827-91	s RES, CHIP 150 (1608)
R180	1-218-827-91	s RES, CHIP 150 (1608)
R181	1-218-827-91	s RES, CHIP 150 (1608)
R182	1-218-827-91	s RES, CHIP 150 (1608)
R183	1-218-827-91	s RES, CHIP 150 (1608)
R184	1-218-827-91	s RES, CHIP 150 (1608)
R185	1-216-864-91	s CONDUCTOR, CHIP (1608)
R186	1-216-864-91	s CONDUCTOR, CHIP (1608)
R187	1-216-864-91	s CONDUCTOR, CHIP (1608)
R188	1-216-805-91	s RES, CHIP 47 (1608)
R189	1-216-805-91	s RES, CHIP 47 (1608)
R190	1-216-809-91	s RES, CHIP 100 (1608)
R191	1-216-809-91	s RES, CHIP 100 (1608)
R192	1-218-823-91	s RES, CHIP 100 (1608)
R193	1-211-985-91	s RES, CHIP 47 (1608)
R194	1-211-985-91	s RES, CHIP 47 (1608)
R195	1-218-846-91	s RES, CHIP 910 (1608)
R200	1-218-887-91	s RES, CHIP 47K (1608)
R201	1-218-863-91	s RES, CHIP 4.7K (1608)
R202	1-216-821-91	s RES, CHIP 1.0K (1608)
R203	1-216-825-91	s RES, CHIP 2.2K (1608)
R204	1-216-801-91	s RES, CHIP 22 (1608)
R205	1-216-801-91	s RES, CHIP 22 (1608)

(BD BOARD (BKM-61D))

Ref. No. or Q'ty	Part No.	SP Description
R206	1-216-809-91	s RES, CHIP 100 (1608)
R207	1-216-809-91	s RES, CHIP 100 (1608)
R208	1-216-841-91	s RES, CHIP 47K (1608)
R209	1-216-801-91	s RES, CHIP 22 (1608)
R210	1-216-801-91	s RES, CHIP 22 (1608)
R211	1-216-809-91	s RES, CHIP 100 (1608)
R212	1-216-809-91	s RES, CHIP 100 (1608)
R213	1-216-809-91	s RES, CHIP 100 (1608)
R214	1-216-825-91	s RES, CHIP 2.2K (1608)
R215	1-218-847-91	s RES, CHIP 1.0K (1608)
R216	1-218-847-91	s RES, CHIP 1.0K (1608)
R217	1-218-873-91	s RES, CHIP 12K (1608)
R218	1-218-871-91	s RES, CHIP 10K (1608)
R219	1-216-822-91	s RES, CHIP 1.2K (1608)
R221	1-216-801-91	s RES, CHIP 22 (1608)
R222	1-218-859-91	s RES, CHIP 3.3K (1608)
R223	1-216-825-91	s RES, CHIP 2.2K (1608)
R224	1-216-809-91	s RES, CHIP 100 (1608)
R225	1-216-825-91	s RES, CHIP 2.2K (1608)
R229	1-216-809-91	s RES, CHIP 100 (1608)
R237	1-218-887-91	s RES, CHIP 47K (1608)
R238	1-218-878-91	s RES, CHIP 20K (1608)
R239	1-216-841-91	s RES, CHIP 47K (1608)
R240	1-218-830-91	s RES, CHIP 200 (1608)
R241	1-218-823-91	s RES, CHIP 100 (1608)
R242	1-218-861-91	s RES, CHIP 3.9K (1608)
R243	1-218-855-91	s RES, CHIP 2.2K (1608)
R244	1-218-847-91	s RES, CHIP 1.0K (1608)
R245	1-216-825-91	s RES, CHIP 2.2K (1608)
R248	1-218-857-91	s RES, CHIP 2.7K (1608)
R258	1-216-864-91	s CONDUCTOR, CHIP (1608)
R259	1-216-864-91	s CONDUCTOR, CHIP (1608)
R263	1-218-839-91	s RES, CHIP 470 (1608)
R268	1-216-801-91	s RES, CHIP 22 (1608)
R270	1-216-864-91	s CONDUCTOR, CHIP (1608)
R271	1-218-901-91	s RES, CHIP 180K (1608)
R272	1-218-887-91	s RES, CHIP 47K (1608)
R273	1-218-838-91	s RES, CHIP 430 (1608)
R274	1-218-837-91	s RES, CHIP 390 (1608)
R276	1-216-864-91	s CONDUCTOR, CHIP (1608)
R277	1-216-864-91	s CONDUCTOR, CHIP (1608)
R278	1-218-853-91	s RES, CHIP 1.8K (1608)
R279	1-218-829-91	s RES, CHIP 180 (1608)
R282	1-218-877-91	s RES, CHIP 18K (1608)
R283	1-218-841-91	s RES, CHIP 560 (1608)
R284	1-218-837-91	s RES, CHIP 390 (1608)
R285	1-218-837-91	s RES, CHIP 390 (1608)
R288	1-216-864-91	s CONDUCTOR, CHIP (1608)
R300	1-218-887-91	s RES, CHIP 47K (1608)
R301	1-218-863-91	s RES, CHIP 4.7K (1608)
R302	1-216-821-91	s RES, CHIP 1.0K (1608)
R303	1-216-825-91	s RES, CHIP 2.2K (1608)
R304	1-216-801-91	s RES, CHIP 22 (1608)
R305	1-216-801-91	s RES, CHIP 22 (1608)
R306	1-216-809-91	s RES, CHIP 100 (1608)
R307	1-216-809-91	s RES, CHIP 100 (1608)
R308	1-216-841-91	s RES, CHIP 47K (1608)
R309	1-216-801-91	s RES, CHIP 22 (1608)
R310	1-216-801-91	s RES, CHIP 22 (1608)

(BD BOARD (BKM-61D))

Ref. No. or Q'ty	Part No.	SP Description
R311	1-216-809-91	s RES, CHIP 100 (1608)
R312	1-216-809-91	s RES, CHIP 100 (1608)
R313	1-216-809-91	s RES, CHIP 100 (1608)
R314	1-216-825-91	s RES, CHIP 2.2K (1608)
R315	1-218-847-91	s RES, CHIP 1.0K (1608)
R316	1-218-847-91	s RES, CHIP 1.0K (1608)
R317	1-218-873-91	s RES, CHIP 12K (1608)
R318	1-218-871-91	s RES, CHIP 10K (1608)
R319	1-216-822-91	s RES, CHIP 1.2K (1608)
R320	1-216-801-91	s RES, CHIP 22 (1608)
R322	1-218-859-91	s RES, CHIP 3.3K (1608)
R323	1-216-825-91	s RES, CHIP 2.2K (1608)
R324	1-216-809-91	s RES, CHIP 100 (1608)
R325	1-216-825-91	s RES, CHIP 2.2K (1608)
R329	1-216-809-91	s RES, CHIP 100 (1608)
R341	1-218-823-91	s RES, CHIP 100 (1608)
R342	1-218-852-91	s RES, CHIP 1.6K (1608)
R343	1-218-832-91	s RES, CHIP 240 (1608)
R344	1-216-809-91	s RES, CHIP 100 (1608)
R345	1-218-845-91	s RES, CHIP 820 (1608)
R346	1-216-809-91	s RES, CHIP 100 (1608)
R347	1-218-839-91	s RES, CHIP 470 (1608)
R348	1-216-864-91	s CONDUCTOR, CHIP (1608)
R350	1-218-843-91	s RES, CHIP 680 (1608)
R351	1-218-837-91	s RES, CHIP 390 (1608)
R400	1-218-887-91	s RES, CHIP 47K (1608)
R401	1-218-863-91	s RES, CHIP 4.7K (1608)
R402	1-216-821-91	s RES, CHIP 1.0K (1608)
R403	1-216-825-91	s RES, CHIP 2.2K (1608)
R404	1-216-801-91	s RES, CHIP 22 (1608)
R405	1-216-801-91	s RES, CHIP 22 (1608)
R406	1-216-809-91	s RES, CHIP 100 (1608)
R407	1-216-801-91	s RES, CHIP 22 (1608)
R408	1-216-801-91	s RES, CHIP 22 (1608)
R409	1-216-809-91	s RES, CHIP 100 (1608)
R410	1-216-809-91	s RES, CHIP 100 (1608)
R411	1-216-841-91	s RES, CHIP 47K (1608)
R412	1-216-801-91	s RES, CHIP 22 (1608)
R413	1-216-801-91	s RES, CHIP 22 (1608)
R414	1-216-809-91	s RES, CHIP 100 (1608)
R415	1-216-809-91	s RES, CHIP 100 (1608)
R416	1-216-809-91	s RES, CHIP 100 (1608)
R417	1-216-825-91	s RES, CHIP 2.2K (1608)
R418	1-218-847-91	s RES, CHIP 1.0K (1608)
R419	1-218-847-91	s RES, CHIP 1.0K (1608)
R420	1-218-873-91	s RES, CHIP 12K (1608)
R421	1-218-871-91	s RES, CHIP 10K (1608)
R422	1-216-822-91	s RES, CHIP 1.2K (1608)
R424	1-216-801-91	s RES, CHIP 22 (1608)
R425	1-218-859-91	s RES, CHIP 3.3K (1608)
R426	1-216-825-91	s RES, CHIP 2.2K (1608)
R427	1-216-809-91	s RES, CHIP 100 (1608)
R428	1-216-825-91	s RES, CHIP 2.2K (1608)
R429	1-216-809-91	s RES, CHIP 100 (1608)
R441	1-218-823-91	s RES, CHIP 100 (1608)
R442	1-218-852-91	s RES, CHIP 1.6K (1608)
R443	1-218-832-91	s RES, CHIP 240 (1608)
R444	1-216-809-91	s RES, CHIP 100 (1608)
R445	1-218-845-91	s RES, CHIP 820 (1608)

(BD BOARD (BKM-61D))

Ref. No. or Q'ty	Part No.	SP Description
R446	1-216-809-91	s RES, CHIP 100 (1608)
R447	1-218-839-91	s RES, CHIP 470 (1608)
R448	1-216-864-91	s CONDUCTOR, CHIP (1608)
R450	1-218-843-91	s RES, CHIP 680 (1608)
R451	1-218-837-91	s RES, CHIP 390 (1608)
R500	1-216-841-91	s RES, CHIP 47K (1608)
R501	1-216-841-91	s RES, CHIP 47K (1608)
R502	1-216-841-91	s RES, CHIP 47K (1608)
R503	1-216-841-91	s RES, CHIP 47K (1608)
R504	1-216-841-91	s RES, CHIP 47K (1608)
R505	1-216-841-91	s RES, CHIP 47K (1608)
R506	1-216-841-91	s RES, CHIP 47K (1608)
R507	1-216-825-91	s RES, CHIP 2.2K (1608)
R508	1-216-809-91	s RES, CHIP 100 (1608)
R509	1-216-833-91	s RES, CHIP 10K (1608)
R510	1-216-853-91	s RES, CHIP 470K (1608)
R511	1-218-898-91	s RES, CHIP 130K (1608)
R512	1-216-853-91	s RES, CHIP 470K (1608)
R513	1-216-815-91	s RES, CHIP 330 (1608)
R514	1-216-833-91	s RES, CHIP 10K (1608)
R521	1-216-833-91	s RES, CHIP 10K (1608)
R522	1-216-829-91	s RES, CHIP 4.7K (1608)
R523	1-216-864-91	s CONDUCTOR, CHIP (1608)
R524	1-216-864-91	s CONDUCTOR, CHIP (1608)
R525	1-216-864-91	s CONDUCTOR, CHIP (1608)
R526	1-216-864-91	s CONDUCTOR, CHIP (1608)
R528	1-216-864-91	s CONDUCTOR, CHIP (1608)
R529	1-216-808-91	s RES, CHIP 82 (1608)
R530	1-216-809-91	s RES, CHIP 100 (1608)
R531	1-216-797-91	s RES, CHIP 10 (1608)
R532	1-216-833-91	s RES, CHIP 10K (1608)
R533	1-216-833-91	s RES, CHIP 10K (1608)
R536	1-218-889-91	s RES, CHIP 56K (1608)
R537	1-218-907-91	s RES, CHIP 330K (1608)
R538	1-218-867-91	s RES, CHIP 6.8K (1608)
R539	1-218-901-91	s RES, CHIP 180K (1608)
R540	1-216-829-91	s RES, CHIP 4.7K (1608)
R541	1-218-873-91	s RES, CHIP 12K (1608)
R542	1-218-879-91	s RES, CHIP 22K (1608)
R543	1-218-875-91	s RES, CHIP 15K (1608)
R544	1-216-821-91	s RES, CHIP 1.0K (1608)
R545	1-218-849-91	s RES, CHIP 1.2K (1608)
R546	1-218-875-91	s RES, CHIP 15K (1608)
R547	1-218-861-91	s RES, CHIP 3.9K (1608)
R548	1-218-863-91	s RES, CHIP 4.7K (1608)
R549	1-216-864-91	s CONDUCTOR, CHIP (1608)
R550	1-216-793-91	s RES, CHIP 4.7 (1608)
R551	1-216-833-91	s RES, CHIP 10K (1608)
R552	1-216-833-91	s RES, CHIP 10K (1608)
R553	1-216-793-91	s RES, CHIP 4.7 (1608)
R555	1-216-829-91	s RES, CHIP 4.7K (1608)
R556	1-216-829-91	s RES, CHIP 4.7K (1608)
R557	1-216-829-91	s RES, CHIP 4.7K (1608)
R558	1-216-815-91	s RES, CHIP 330 (1608)
R559	1-216-815-91	s RES, CHIP 330 (1608)
R560	1-216-841-91	s RES, CHIP 47K (1608)
R561	1-216-841-91	s RES, CHIP 47K (1608)
R563	1-216-841-91	s RES, CHIP 47K (1608)
R564	1-216-841-91	s RES, CHIP 47K (1608)

(BD BOARD (BKM-61D))

Ref. No. or Q'ty	Part No.	SP Description
R565	1-218-887-91	s RES, CHIP 47K (1608)
R566	1-216-809-91	s RES, CHIP 100 (1608)
R567	1-219-706-21	s RES, CHIP (SQUARE TYPE) 0.10
R568	1-218-887-91	s RES, CHIP 47K (1608)
R569	1-218-879-91	s RES, CHIP 22K (1608)
R571	1-218-847-91	s RES, CHIP 1.0K (1608)
R572	1-218-887-91	s RES, CHIP 47K (1608)
R573	1-216-809-91	s RES, CHIP 100 (1608)
R574	1-216-809-91	s RES, CHIP 100 (1608)
R577	1-216-864-91	s CONDUCTOR, CHIP (1608)
R600	1-216-829-91	s RES, CHIP 4.7K (1608)
R601	1-216-829-91	s RES, CHIP 4.7K (1608)
R602	1-216-864-91	s CONDUCTOR, CHIP (1608)
R603	1-216-864-91	s CONDUCTOR, CHIP (1608)
R604	1-216-864-91	s CONDUCTOR, CHIP (1608)
R605	1-216-864-91	s CONDUCTOR, CHIP (1608)
R606	1-216-809-91	s RES, CHIP 100 (1608)
R607	1-216-809-91	s RES, CHIP 100 (1608)
R611	1-218-830-91	s RES, CHIP 200 (1608)
R612	1-218-847-91	s RES, CHIP 1.0K (1608)
R613	1-218-830-91	s RES, CHIP 200 (1608)
R614	1-218-847-91	s RES, CHIP 1.0K (1608)
R615	1-216-864-91	s CONDUCTOR, CHIP (1608)
R616	1-216-809-91	s RES, CHIP 100 (1608)
R617	1-216-809-91	s RES, CHIP 100 (1608)
R618	1-216-809-91	s RES, CHIP 100 (1608)
R619	1-216-809-91	s RES, CHIP 100 (1608)
R620	1-216-809-91	s RES, CHIP 100 (1608)
R621	1-216-809-91	s RES, CHIP 100 (1608)
R622	1-216-809-91	s RES, CHIP 100 (1608)
R623	1-216-809-91	s RES, CHIP 100 (1608)
R624	1-216-809-91	s RES, CHIP 100 (1608)
R625	1-216-809-91	s RES, CHIP 100 (1608)
R626	1-216-805-91	s RES, CHIP 47 (1608)
R627	1-216-805-91	s RES, CHIP 47 (1608)
R628	1-216-805-91	s RES, CHIP 47 (1608)
R629	1-216-805-91	s RES, CHIP 47 (1608)
R630	1-216-805-91	s RES, CHIP 47 (1608)
R631	1-216-837-91	s RES, CHIP 22K (1608)
R632	1-216-809-91	s RES, CHIP 100 (1608)
R633	1-216-809-91	s RES, CHIP 100 (1608)
R634	1-216-809-91	s RES, CHIP 100 (1608)
R637	1-216-837-91	s RES, CHIP 22K (1608)
R640	1-216-833-91	s RES, CHIP 10K (1608)
R641	1-216-833-91	s RES, CHIP 10K (1608)
R642	1-216-833-91	s RES, CHIP 10K (1608)
R643	1-216-864-91	s CONDUCTOR, CHIP (1608)
R644	1-216-805-91	s RES, CHIP 47 (1608)
R645	1-216-809-91	s RES, CHIP 100 (1608)
R647	1-216-813-91	s RES, CHIP 220 (1608)
R648	1-216-805-91	s RES, CHIP 47 (1608)
R649	1-218-269-91	s RES, CHIP 360 (1608)
R653	1-216-813-91	s RES, CHIP 220 (1608)
R654	1-218-269-91	s RES, CHIP 360 (1608)
R655	1-216-864-91	s CONDUCTOR, CHIP (1608)
R656	1-216-864-91	s CONDUCTOR, CHIP (1608)
R657	1-216-864-91	s CONDUCTOR, CHIP (1608)
R658	1-216-864-91	s CONDUCTOR, CHIP (1608)
R659	1-216-864-91	s CONDUCTOR, CHIP (1608)

(BD BOARD (BKM-61D))

Ref. No. or Q'ty	Part No.	SP Description
R660	1-216-864-91	s CONDUCTOR, CHIP (1608)
R662	1-216-864-91	s CONDUCTOR, CHIP (1608)
R663	1-216-864-91	s CONDUCTOR, CHIP (1608)
R667	1-218-879-91	s RES, CHIP 22K (1608)
R668	1-218-885-91	s RES, CHIP 39K (1608)
R669	1-218-879-91	s RES, CHIP 22K (1608)
R670	1-218-885-91	s RES, CHIP 39K (1608)
R671	1-216-833-91	s RES, CHIP 10K (1608)
R750	1-218-823-91	s RES, CHIP 100 (1608)
R751	1-218-857-91	s RES, CHIP 2.7K (1608)
R752	1-216-821-91	s RES, CHIP 1.0K (1608)
R753	1-218-832-91	s RES, CHIP 240 (1608)
R754	1-218-832-91	s RES, CHIP 240 (1608)
R755	1-218-823-91	s RES, CHIP 100 (1608)
R756	1-218-861-91	s RES, CHIP 3.9K (1608)
R757	1-218-853-91	s RES, CHIP 1.8K (1608)
R758	1-218-847-91	s RES, CHIP 1.0K (1608)
R759	1-216-825-91	s RES, CHIP 2.2K (1608)
R760	1-216-797-91	s RES, CHIP 10 (1608)
R762	1-218-881-91	s RES, CHIP 27K (1608)
R763	1-216-809-91	s RES, CHIP 100 (1608)
R764	1-216-823-91	s RES, CHIP 1.5K (1608)
R800	1-216-801-91	s RES, CHIP 22 (1608)
R801	1-216-801-91	s RES, CHIP 22 (1608)
R802	1-218-859-91	s RES, CHIP 3.3K (1608)
R803	1-216-801-91	s RES, CHIP 22 (1608)
R804	1-216-801-91	s RES, CHIP 22 (1608)
R805	1-216-829-91	s RES, CHIP 4.7K (1608)
R806	1-216-864-91	s CONDUCTOR, CHIP (1608)
R808	1-216-864-91	s CONDUCTOR, CHIP (1608)
R809	1-216-805-91	s RES, CHIP 47 (1608)
R810	1-216-864-91	s CONDUCTOR, CHIP (1608)
R811	1-216-805-91	s RES, CHIP 47 (1608)
R812	1-216-805-91	s RES, CHIP 47 (1608)
R813	1-216-829-91	s RES, CHIP 4.7K (1608)
R814	1-216-809-91	s RES, CHIP 100 (1608)
R815	1-216-809-91	s RES, CHIP 100 (1608)
R816	1-216-809-91	s RES, CHIP 100 (1608)
R817	1-216-801-91	s RES, CHIP 22 (1608)
R818	1-216-801-91	s RES, CHIP 22 (1608)
R819	1-216-801-91	s RES, CHIP 22 (1608)
R820	1-216-801-91	s RES, CHIP 22 (1608)
R821	1-216-815-91	s RES, CHIP 330 (1608)
R823	1-216-864-91	s CONDUCTOR, CHIP (1608)
R825	1-216-864-91	s CONDUCTOR, CHIP (1608)
R827	1-216-864-91	s CONDUCTOR, CHIP (1608)
R829	1-216-864-91	s CONDUCTOR, CHIP (1608)
R830	1-216-829-91	s RES, CHIP 4.7K (1608)
R831	1-216-829-91	s RES, CHIP 4.7K (1608)
R832	1-216-829-91	s RES, CHIP 4.7K (1608)
R833	1-216-829-91	s RES, CHIP 4.7K (1608)
R834	1-216-833-91	s RES, CHIP 10K (1608)
R900	1-216-829-91	s RES, CHIP 4.7K (1608)
R901	1-216-864-91	s CONDUCTOR, CHIP (1608)
R908	1-216-864-91	s CONDUCTOR, CHIP (1608)
R910	1-216-801-91	s RES, CHIP 22 (1608)
R911	1-216-801-91	s RES, CHIP 22 (1608)
R912	1-216-801-91	s RES, CHIP 22 (1608)
R913	1-216-797-91	s RES, CHIP 10 (1608)

(BD BOARD (BKM-61D))

Ref. No. or Q'ty	Part No.	SP Description
R914	1-216-801-91	s RES, CHIP 22 (1608)
R915	1-216-801-91	s RES, CHIP 22 (1608)
R916	1-216-801-91	s RES, CHIP 22 (1608)
R917	1-216-807-91	s RES, CHIP 68 (1608)
R918	1-216-807-91	s RES, CHIP 68 (1608)
R919	1-216-807-91	s RES, CHIP 68 (1608)
R920	1-216-807-91	s RES, CHIP 68 (1608)
R921	1-216-807-91	s RES, CHIP 68 (1608)
R922	1-216-807-91	s RES, CHIP 68 (1608)
R923	1-216-807-91	s RES, CHIP 68 (1608)
R924	1-216-807-91	s RES, CHIP 68 (1608)
R925	1-216-801-91	s RES, CHIP 22 (1608)
R926	1-216-801-91	s RES, CHIP 22 (1608)
R927	1-216-807-91	s RES, CHIP 68 (1608)
R928	1-216-807-91	s RES, CHIP 68 (1608)
R929	1-216-801-91	s RES, CHIP 22 (1608)
R930	1-216-807-91	s RES, CHIP 68 (1608)
R931	1-216-801-91	s RES, CHIP 22 (1608)
R932	1-216-837-91	s RES, CHIP 22K (1608)
R933	1-216-805-91	s RES, CHIP 47 (1608)
R934	1-216-805-91	s RES, CHIP 47 (1608)
R935	1-216-825-91	s RES, CHIP 2.2K (1608)
R936	1-216-809-91	s RES, CHIP 100 (1608)
R937	1-216-864-91	s CONDUCTOR, CHIP (1608)
R938	1-216-805-91	s RES, CHIP 47 (1608)
R939	1-216-805-91	s RES, CHIP 47 (1608)
R940	1-216-837-91	s RES, CHIP 22K (1608)
R941	1-216-837-91	s RES, CHIP 22K (1608)
R942	1-216-837-91	s RES, CHIP 22K (1608)
R943	1-216-833-91	s RES, CHIP 10K (1608)
R946	1-216-830-91	s RES, CHIP 5.6K (1608)
R947	1-218-294-91	s RES, CHIP 30K (1608)
RB100	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB101	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB102	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB600	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB602	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB604	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB606	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB607	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB608	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB609	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB610	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB611	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB612	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB613	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB614	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB615	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB800	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB801	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB802	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB803	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB804	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB805	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB806	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB807	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB808	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB809	1-234-795-21	s RES, NETWORK 0X4 (2010)

(BD BOARD (BKM-61D))

Ref. No. or Q'ty	Part No.	SP Description
RB810	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB811	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB812	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB813	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB814	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB815	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB816	1-234-795-21	s RES, NETWORK 0X4 (2010)
RB900	1-233-414-21	s RES, CHIP NETWORK 4.7K (3216)
RB901	1-233-414-21	s RES, CHIP NETWORK 4.7K (3216)
RB902	1-233-416-21	s RES, CHIP NETWORK 22K (3216)
RB903	1-233-415-21	s RES, CHIP NETWORK 10K (3216)
RB904	1-233-416-21	s RES, CHIP NETWORK 22K (3216)
RB905	1-233-416-21	s RES, CHIP NETWORK 22K (3216)
RB906	1-233-880-21	s RES, NETWORK 68 (3216)
RB907	1-233-880-21	s RES, NETWORK 68 (3216)
RB908	1-233-880-21	s RES, NETWORK 68 (3216)
RB909	1-233-575-21	s RES, CHIP NETWORK 22 (3216)
RB910	1-233-575-21	s RES, CHIP NETWORK 22 (3216)
RB911	1-233-880-21	s RES, NETWORK 68 (3216)
RB912	1-233-880-21	s RES, NETWORK 68 (3216)
RB913	1-233-423-21	s RES, CHIP NETWORK 47 (3216)
RB914	1-233-423-21	s RES, CHIP NETWORK 47 (3216)
RB915	1-233-880-21	s RES, NETWORK 68 (3216)
RB916	1-233-578-21	s RES, CHIP NETWORK 47K (3216)
RB917	1-233-578-21	s RES, CHIP NETWORK 47K (3216)
RB918	1-233-578-21	s RES, CHIP NETWORK 47K (3216)
S520	1-771-709-21	s SWITCH, SLIDE
TP100	1-535-877-22	s CHIP, CHECKER
TP101	1-535-877-22	s CHIP, CHECKER
TP102	1-535-877-22	s CHIP, CHECKER
TP170	1-535-877-22	s CHIP, CHECKER
TP171	1-535-877-22	s CHIP, CHECKER
TP172	1-535-877-22	s CHIP, CHECKER
TP173	1-535-877-22	s CHIP, CHECKER
TP174	1-535-877-22	s CHIP, CHECKER
TP175	1-535-877-22	s CHIP, CHECKER
TP200	1-535-877-22	s CHIP, CHECKER
TP300	1-535-877-22	s CHIP, CHECKER
TP400	1-535-877-22	s CHIP, CHECKER
TP500	1-535-877-22	s CHIP, CHECKER
TP520	1-535-877-22	s CHIP, CHECKER
TP600	1-535-877-22	s CHIP, CHECKER
TP700	1-535-877-22	s CHIP, CHECKER
TP901	1-535-877-22	s CHIP, CHECKER
TP902	1-535-877-22	s CHIP, CHECKER
X520	1-795-984-11	s OSCILLATOR, CRYSTAL
X600	1-767-399-81	s VIBRATOR, CRYSTAL (24.576 MHz)
X900	1-795-984-11	s OSCILLATOR, CRYSTAL

BHS BOARD (BKM-62HS)

Ref. No. or Q'ty	Part No.	SP Description
C108	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C109	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C110	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C111	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C112	1-127-760-91	s CAP, CHIP CERAMIC 4.7MF B 2012
C113	1-127-760-91	s CAP, CHIP CERAMIC 4.7MF B 2012
C114	1-125-891-91	s CAP, CHIP CERAMIC0.47MF B 1608
C115	1-125-891-91	s CAP, CHIP CERAMIC0.47MF B 1608
C117	1-165-908-91	s CAP, CERAMIC 1000000PF B 1608
C118	1-162-904-91	s CAP, CERAMIC 0.5PF CK 1608
C119	1-162-904-91	s CAP, CERAMIC 0.5PF CK 1608
C121	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C122	1-125-891-91	s CAP, CHIP CERAMIC0.47MF B 1608
C123	1-125-891-91	s CAP, CHIP CERAMIC0.47MF B 1608
C125	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C127	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C128	1-127-760-91	s CAP, CHIP CERAMIC 4.7MF B 2012
C129	1-127-760-91	s CAP, CHIP CERAMIC 4.7MF B 2012
C130	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C131	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C132	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C133	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C134	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C135	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C136	1-165-908-91	s CAP, CERAMIC 1000000PF B 1608
C137	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C138	1-165-908-91	s CAP, CERAMIC 1000000PF B 1608
C139	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C140	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C141	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C142	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C143	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C144	1-127-760-91	s CAP, CHIP CERAMIC 4.7MF B 2012
C145	1-162-966-91	s CAP, CERAMIC 2200PF B 1608
C146	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C147	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C148	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C149	1-165-908-91	s CAP, CERAMIC 1000000PF B 1608
C150	1-165-908-91	s CAP, CERAMIC 1000000PF B 1608
C151	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C153	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C154	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C155	1-125-837-91	s CAP, CHIP CERAMIC 1MF B (1608)
C156	1-125-837-91	s CAP, CHIP CERAMIC 1MF B (1608)
C157	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C158	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C159	1-125-837-91	s CAP, CHIP CERAMIC 1MF B (1608)
C160	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C161	1-125-837-91	s CAP, CHIP CERAMIC 1MF B (1608)
C162	1-125-837-91	s CAP, CHIP CERAMIC 1MF B (1608)
C170	1-162-925-91	s CAP, CERAMIC 68PF CH 1608
C171	1-164-315-91	s CAP, CERAMIC 470PF CH (1608)
C172	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C173	1-162-923-91	s CAP, CERAMIC 47PF CH 1608
C174	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C175	1-125-838-91	s CAP, CHIP CERAMIC2.2MF B(2012)
C176	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C177	1-162-966-91	s CAP, CERAMIC 2200PF B 1608
C178	1-162-966-91	s CAP, CERAMIC 2200PF B 1608

(BHS BOARD (BKM-62HS))

Ref. No. or Q'ty	Part No.	SP	Description
C179	1-162-925-91	s	CAP, CERAMIC 68PF CH 1608
C180	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C181	1-164-315-91	s	CAP, CERAMIC 470PF CH (1608)
C182	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608
C183	1-162-968-91	s	CAP,CHIP CERAMIC 4700PF B 1608
C184	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C185	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C186	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C187	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C188	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C189	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C208	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C209	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C210	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C211	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C212	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C213	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C214	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C215	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C217	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C218	1-162-904-91	s	CAP, CERAMIC 0.5PF CK 1608
C219	1-162-904-91	s	CAP, CERAMIC 0.5PF CK 1608
C221	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C222	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C223	1-125-891-91	s	CAP, CHIP CERAMIC0.47MF B 1608
C225	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C227	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C228	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C229	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C230	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C231	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C232	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C233	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C234	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C235	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C236	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C237	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C238	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C239	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C240	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C241	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C242	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C243	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C244	1-127-760-91	s	CAP, CHIP CERAMIC 4.7MF B 2012
C245	1-162-966-91	s	CAP, CERAMIC 2200PF B 1608
C246	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C247	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C248	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C249	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C250	1-165-908-91	s	CAP, CERAMIC 1000000PF B 1608
C251	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C253	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C254	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C255	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C256	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C257	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C258	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C259	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C260	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608

(BHS BOARD (BKM-62HS))

Ref. No. or Q'ty	Part No.	SP	Description
C261	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C262	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C270	1-135-344-21	s	CAP, ELECT 270MF (10X8)
C271	1-127-820-91	s	CAP, CHIP CERAMIC 4.7MF B 3216
C272	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C273	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C274	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C275	1-135-344-21	s	CAP, ELECT 270MF (10X8)
C276	1-165-667-21	s	CAP, ELECT 100MF
C277	1-165-668-21	s	CAP, ELECT 150MF
C279	1-135-344-21	s	CAP, ELECT 270MF (10X8)
C281	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C282	1-135-341-21	s	CAP, ELECT 330MF (10X8)
C283	1-135-341-21	s	CAP, ELECT 330MF (10X8)
C284	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C285	1-126-401-21	s	CAP, CHIP ELECT 1MF (4X5.7)
C286	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C287	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C288	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C289	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C300	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C301	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C302	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C303	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C304	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C305	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C306	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C307	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C308	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C309	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C310	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C311	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C312	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C313	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C314	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C315	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C316	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C317	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C318	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C319	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C320	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C321	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C322	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C323	1-100-597-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C324	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C325	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C326	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C327	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C328	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C329	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C330	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C331	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C400	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C401	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C402	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C403	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C404	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C405	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C406	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608

(BHS BOARD (BKM-62HS))

Ref. No. or Q'ty	Part No.	SP Description
C407	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C408	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C409	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C410	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C411	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C412	1-131-661-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C413	1-131-661-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C414	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C415	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C416	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C417	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C419	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C420	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C421	1-135-341-21	s CAP, ELECT 330MF (10X8)
C422	1-135-341-21	s CAP, ELECT 330MF (10X8)
C423	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C450	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C451	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C452	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C453	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C454	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C455	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C456	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C457	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C458	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C459	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C460	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C461	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C462	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C463	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C520	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C521	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C522	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C523	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C525	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C526	1-162-925-91	s CAP, CERAMIC 68PF CH 1608
C527	1-164-315-91	s CAP, CERAMIC 470PF CH (1608)
C528	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C529	1-162-923-91	s CAP, CERAMIC 47PF CH 1608
C530	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C531	1-125-838-91	s CAP, CHIP CERAMIC2.2MF B(2012)
C532	1-164-245-91	s CAP, CERAMIC 15000PF B 1608
C533	1-162-966-91	s CAP, CERAMIC 2200PF B 1608
C534	1-162-966-91	s CAP, CERAMIC 2200PF B 1608
C535	1-162-925-91	s CAP, CERAMIC 68PF CH 1608
C536	1-164-315-91	s CAP, CERAMIC 470PF CH (1608)
C537	1-164-315-91	s CAP, CERAMIC 470PF CH (1608)
C538	1-162-966-91	s CAP, CERAMIC 2200PF B 1608
C539	1-162-968-91	s CAP, CHIP CERAMIC 4700PF B 1608
C540	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C541	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C542	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C543	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C544	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C545	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C546	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C547	1-127-820-91	s CAP, CHIP CERAMIC 4.7MF B 3216
C548	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C549	1-135-344-21	s CAP, ELECT 270MF (10X8)

(BHS BOARD (BKM-62HS))

Ref. No. or Q'ty	Part No.	SP Description
C550	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C551	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C552	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C553	1-135-344-21	s CAP, ELECT 270MF (10X8)
C554	1-165-667-21	s CAP, ELECT 100MF
C555	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C556	1-165-668-21	s CAP, ELECT 150MF
C558	1-135-344-21	s CAP, ELECT 270MF (10X8)
C559	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C561	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C562	1-135-341-21	s CAP, ELECT 330MF (10X8)
C563	1-135-341-21	s CAP, ELECT 330MF (10X8)
C564	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C565	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C566	1-126-401-21	s CAP, CHIP ELECT 1MF (4X5.7)
C567	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C568	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C569	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C570	1-126-405-21	s CAP, CHIP ELECT 10MF (6.3X5.7)
C571	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C572	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C573	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C575	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C576	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C577	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C578	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C579	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C580	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C600	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C601	1-125-837-91	s CAP, CHIP CERAMIC 1MF B (1608)
C602	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C603	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C604	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C605	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C606	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C607	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C608	1-162-918-91	s CAP, CERAMIC 18PF CH 1608
C609	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C610	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C611	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C612	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C613	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C614	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C650	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C651	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C652	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C700	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C701	1-125-837-91	s CAP, CHIP CERAMIC 1MF B (1608)
C702	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C703	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C704	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C705	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C706	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C707	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C708	1-162-919-91	s CAP, CERAMIC 22PF CH 1608
C709	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C710	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C711	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C712	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608

(BHS BOARD (BKM-62HS))

Ref. No. or Q'ty	Part No.	SP	Description
C713	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C714	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C715	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C716	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C717	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C750	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C751	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C752	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C800	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C801	1-125-837-91	s	CAP, CHIP CERAMIC 1MF B (1608)
C802	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C803	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C804	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C805	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C806	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C807	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C808	1-162-918-91	s	CAP, CERAMIC 18PF CH 1608
C809	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C810	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C811	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C812	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C813	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C814	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C815	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C816	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C817	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C850	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C851	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C852	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C900	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C901	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C902	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C903	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C904	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C906	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C907	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C908	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C909	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C910	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C911	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C912	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C913	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C914	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C915	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C916	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C917	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C918	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C919	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C920	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C921	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C922	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C923	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C924	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C925	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C926	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C927	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C928	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C929	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C930	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608

(BHS BOARD (BKM-62HS))

Ref. No. or Q'ty	Part No.	SP	Description
C931	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C932	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
CN100	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN101	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN200	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN201	1-793-324-11	o	CONNECTOR, COAXIAL (BNC TYPE)
CN450	1-817-753-11	o	CONNECTOR, BOARD TO BOARD 100P
CN451	1-817-753-11	o	CONNECTOR, BOARD TO BOARD 100P
CN452	1-695-207-21	o	PIN, ACONNECTOR (PC BOARD) 6P
CN453	1-695-207-21	o	PIN, ACONNECTOR (PC BOARD) 6P
CN454	1-695-208-21	o	PIN, CONNECTOR (PC BOARD) 7P
CN455	1-695-208-21	o	PIN, CONNECTOR (PC BOARD) 7P
CN900	1-764-080-21	o	PIN, CONNECTOR (PC BOARD) 8P
D150	8-719-027-76	s	DIODE 1SS357-TPH3
D151	8-719-027-76	s	DIODE 1SS357-TPH3
D152	8-719-073-92	s	DIODE RB060L-40TE25
D153	8-719-073-92	s	DIODE RB060L-40TE25
D154	8-719-404-50	s	DIODE MA111-TX
D155	8-719-064-52	s	DIODE CL-191YG-CD-T
D156	8-719-404-50	s	DIODE MA111-TX
D400	8-719-404-50	s	DIODE MA111-TX
D401	8-719-404-50	s	DIODE MA111-TX
D520	8-719-064-52	s	DIODE CL-191YG-CD-T
D521	8-719-027-76	s	DIODE 1SS357-TPH3
D522	8-719-027-76	s	DIODE 1SS357-TPH3
D523	8-719-073-92	s	DIODE RB060L-40TE25
D524	8-719-073-92	s	DIODE RB060L-40TE25
D525	8-719-404-50	s	DIODE MA111-TX
D526	8-719-404-50	s	DIODE MA111-TX
D527	8-719-064-52	s	DIODE CL-191YG-CD-T
D528	8-719-404-50	s	DIODE MA111-TX
D900	8-719-064-52	s	DIODE CL-191YG-CD-T
D901	8-719-404-50	s	DIODE MA111-TX
F150	1-576-269-21	s	FUSE (SMD) (3.15A/125V)
F151	1-576-269-21	s	FUSE (SMD) (3.15A/125V)
F152	1-576-269-21	s	FUSE (SMD) (3.15A/125V)
F523	1-533-999-21	s	FUSE, (SMD) (2A/125V)
F524	1-533-999-21	s	FUSE, (SMD) (2A/125V)
F525	1-533-999-21	s	FUSE, (SMD) (2A/125V)
FB400	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB600	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB700	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB800	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FL450	1-234-493-21	s	FILTER, EMI
FL650	1-234-924-11	s	LOW PASS FILTER
FL750	1-234-924-11	s	LOW PASS FILTER
FL850	1-234-924-11	s	LOW PASS FILTER
IC103	6-702-620-01	s	IC GS1524-CKDE3
IC104	6-705-672-01	s	IC GS1560ACFE3
IC150	6-702-510-01	s	IC TP85120DBTRG4
IC203	6-702-620-01	s	IC GS1524-CKDE3
IC204	6-705-672-01	s	IC GS1560ACFE3
IC400	6-700-743-01	s	IC ADV7123JSTZ240
IC401	8-759-573-91	s	IC AD8055ARTZ-REEL7
IC402	8-759-183-53	s	IC TL431CPK-E2
IC403	6-705-469-01	s	IC BA50BC0FP-E2
IC404	8-759-539-89	s	IC LM2990SX-5.0

(BHS BOARD (BKM-62HS))

Ref. No. or Q'ty	Part No.	SP Description
IC405	8-759-573-91	s IC AD8055ARTZ-REEL7
IC450	6-706-773-01	s IC AD8075ARUZ-REEL7
IC451	8-759-497-44	s IC TC7WH125FU (TE12R)
IC521	6-706-488-01	s IC TC7SH14FU (T5RSOYJF)
IC522	6-708-748-01	s IC BD4828FVE-TR
IC523	6-702-510-01	s IC TPS5120DBTRG4
IC524	6-704-006-01	s IC BR24L64F-WE2
IC525	6-700-394-01	s IC BA25BC0FP-E2
IC526	6-708-748-01	s IC BD4828FVE-TR
IC600	8-752-375-98	s IC CXD2315Q
IC601	8-759-573-91	s IC AD8055ARTZ-REEL7
IC602	8-759-573-91	s IC AD8055ARTZ-REEL7
IC603	8-759-564-49	s IC TC7W53FU (TE12R)
IC650	8-759-573-91	s IC AD8055ARTZ-REEL7
IC700	8-752-375-98	s IC CXD2315Q
IC701	8-759-573-91	s IC AD8055ARTZ-REEL7
IC702	8-759-573-91	s IC AD8055ARTZ-REEL7
IC703	8-759-573-91	s IC AD8055ARTZ-REEL7
IC704	8-759-564-49	s IC TC7W53FU (TE12R)
IC750	8-759-573-91	s IC AD8055ARTZ-REEL7
IC800	8-752-375-98	s IC CXD2315Q
IC801	8-759-573-91	s IC AD8055ARTZ-REEL7
IC802	8-759-573-91	s IC AD8055ARTZ-REEL7
IC803	8-759-573-91	s IC AD8055ARTZ-REEL7
IC804	8-759-564-49	s IC TC7W53FU (TE12R)
IC850	8-759-573-91	s IC AD8055ARTZ-REEL7
IC900	6-708-748-01	s IC BD4828FVE-TR
IC901	8-759-679-54	s IC SN74LVC14APWR
IC902	6-705-468-01	s IC BA33BC0FP-E2
IC903	6-706-489-01	s IC TC7SH32FU (T5RSOYJF)
IC904	6-709-436-01	s IC LC4128V-5TN100CA1353
IC905	8-759-679-54	s IC SN74LVC14APWR
IC906	8-759-679-54	s IC SN74LVC14APWR
IC907	8-759-573-97	s IC SN74LVC541APWR
IC908	8-759-679-54	s IC SN74LVC14APWR
IC909	8-759-592-49	s IC TC7SZ125FU (TE85R)
IC910	6-706-489-01	s IC TC7SH32FU (T5RSOYJF)
IC912	8-759-592-46	s IC TC7SZ05FU (TE85R)
IC913	6-706-489-01	s IC TC7SH32FU (T5RSOYJF)
L100	1-416-345-21	s COIL, CHOKE 22UH
L101	1-416-345-21	s COIL, CHOKE 22UH
L102	1-414-460-21	s INDUCTOR, CHIP (S) 5.6NH
L103	1-414-463-41	s INDUCTOR, CHIP (J) 10NH
L104	1-414-463-41	s INDUCTOR, CHIP (J) 10NH
L105	1-416-345-21	s COIL, CHOKE 22UH
L106	1-416-345-21	s COIL, CHOKE 22UH
L107	1-416-345-21	s COIL, CHOKE 22UH
L150	1-469-848-21	s INDUCTOR (SMD)
L151	1-469-848-21	s INDUCTOR (SMD)
L152	1-469-848-21	s INDUCTOR (SMD)
L153	1-469-848-21	s INDUCTOR (SMD)
L154	1-469-848-21	s INDUCTOR (SMD)
L200	1-416-345-21	s COIL, CHOKE 22UH
L201	1-416-345-21	s COIL, CHOKE 22UH
L202	1-414-461-41	s INDUCTOR, CHIP (K) 6.8NH
L203	1-414-463-41	s INDUCTOR, CHIP (J) 10NH
L204	1-414-463-41	s INDUCTOR, CHIP (J) 10NH
L205	1-416-345-21	s COIL, CHOKE 22UH
L206	1-416-345-21	s COIL, CHOKE 22UH

(BHS BOARD (BKM-62HS))

Ref. No. or Q'ty	Part No.	SP Description
L207	1-416-345-21	s COIL, CHOKE 22UH
L520	1-469-848-21	s INDUCTOR (SMD)
L521	1-469-848-21	s INDUCTOR (SMD)
L522	1-469-848-21	s INDUCTOR (SMD)
L523	1-469-848-21	s INDUCTOR (SMD)
L524	1-469-848-21	s INDUCTOR (SMD)
L525	1-416-345-21	s COIL, CHOKE 22UH
L526	1-412-955-21	s INDUCTOR, SMALL TYPE 22UH 2520
L900	1-412-955-21	s INDUCTOR, SMALL TYPE 22UH 2520
PS450	1-576-124-21	s LINK, IC (1A/72V)
PS451	1-576-124-21	s LINK, IC (1A/72V)
PS452	1-576-677-21	s RINK, IC (4A/72V)
PS453	1-576-677-21	s RINK, IC (4A/72V)
PS454	1-576-677-21	s RINK, IC (4A/72V)
Q100	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q150	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q152	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q153	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q154	6-550-374-01	s TRANSISTOR TPC8009-H (T2LSONYF)
Q156	6-550-374-01	s TRANSISTOR TPC8009-H (T2LSONYF)
Q158	6-550-374-01	s TRANSISTOR TPC8009-H (T2LSONYF)
Q160	6-550-374-01	s TRANSISTOR TPC8009-H (T2LSONYF)
Q162	8-729-028-81	s TRANSISTOR DTA123JUA-T106
Q163	8-729-026-53	s TRANSISTOR 2SA1576A-T106-QR
Q164	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q165	8-729-028-81	s TRANSISTOR DTA123JUA-T106
Q200	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q400	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q520	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q521	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q522	6-550-374-01	s TRANSISTOR TPC8009-H (T2LSONYF)
Q524	6-550-374-01	s TRANSISTOR TPC8009-H (T2LSONYF)
Q526	6-550-374-01	s TRANSISTOR TPC8009-H (T2LSONYF)
Q528	6-550-374-01	s TRANSISTOR TPC8009-H (T2LSONYF)
Q530	8-729-026-53	s TRANSISTOR 2SA1576A-T106-QR
Q531	8-729-028-81	s TRANSISTOR DTA123JUA-T106
Q532	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q533	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q534	8-729-028-81	s TRANSISTOR DTA123JUA-T106
R103	1-211-990-91	s RES, CHIP 75 (1608)
R104	1-211-990-91	s RES, CHIP 75 (1608)
R105	1-211-983-91	s RES, CHIP 39 (1608)
R106	1-211-990-91	s RES, CHIP 75 (1608)
R107	1-211-990-91	s RES, CHIP 75 (1608)
R108	1-211-990-91	s RES, CHIP 75 (1608)
R109	1-211-990-91	s RES, CHIP 75 (1608)
R110	1-211-990-91	s RES, CHIP 75 (1608)
R111	1-216-833-91	s RES, CHIP 10K (1608)
R114	1-216-864-91	s CONDUCTOR, CHIP (1608)
R116	1-216-864-91	s CONDUCTOR, CHIP (1608)
R117	1-218-833-91	s RES, CHIP 270 (1608)
R118	1-216-864-91	s CONDUCTOR, CHIP (1608)
R119	1-216-833-91	s RES, CHIP 10K (1608)
R120	1-216-833-91	s RES, CHIP 10K (1608)
R121	1-216-864-91	s CONDUCTOR, CHIP (1608)
R122	1-218-863-91	s RES, CHIP 4.7K (1608)
R123	1-216-864-91	s CONDUCTOR, CHIP (1608)
R124	1-218-863-91	s RES, CHIP 4.7K (1608)
R125	1-218-885-91	s RES, CHIP 39K (1608)

(BHS BOARD (BKM-62HS))

Ref. No. or Q'ty	Part No.	SP Description
R126	1-216-833-91	s RES, CHIP 10K (1608)
R127	1-216-864-91	s CONDUCTOR, CHIP (1608)
R128	1-216-833-91	s RES, CHIP 10K (1608)
R131	1-216-833-91	s RES, CHIP 10K (1608)
R132	1-216-833-91	s RES, CHIP 10K (1608)
R133	1-216-833-91	s RES, CHIP 10K (1608)
R134	1-216-864-91	s CONDUCTOR, CHIP (1608)
R135	1-216-829-91	s RES, CHIP 4.7K (1608)
R142	1-216-833-91	s RES, CHIP 10K (1608)
R143	1-211-985-91	s RES, CHIP 47 (1608)
R150	1-218-887-91	s RES, CHIP 47K (1608)
R151	1-218-879-91	s RES, CHIP 22K (1608)
R152	1-216-864-91	s CONDUCTOR, CHIP (1608)
R154	1-216-833-91	s RES, CHIP 10K (1608)
R155	1-216-833-91	s RES, CHIP 10K (1608)
R157	1-218-877-91	s RES, CHIP 18K (1608)
R159	1-218-867-91	s RES, CHIP 6.8K (1608)
R160	1-218-901-91	s RES, CHIP 180K (1608)
R161	1-218-873-91	s RES, CHIP 12K (1608)
R162	1-218-879-91	s RES, CHIP 22K (1608)
R163	1-216-864-91	s CONDUCTOR, CHIP (1608)
R164	1-218-875-91	s RES, CHIP 15K (1608)
R165	1-216-821-91	s RES, CHIP 1.0K (1608)
R166	1-218-849-91	s RES, CHIP 1.2K (1608)
R167	1-218-878-91	s RES, CHIP 20K (1608)
R168	1-218-861-91	s RES, CHIP 3.9K (1608)
R169	1-218-825-91	s RES, CHIP 120 (1608)
R170	1-216-793-91	s RES, CHIP 4.7 (1608)
R171	1-216-793-91	s RES, CHIP 4.7 (1608)
R172	1-216-864-91	s CONDUCTOR, CHIP (1608)
R173	1-216-833-91	s RES, CHIP 10K (1608)
R174	1-216-833-91	s RES, CHIP 10K (1608)
R177	1-218-887-91	s RES, CHIP 47K (1608)
R178	1-216-809-91	s RES, CHIP 100 (1608)
R179	1-219-706-21	s RES, CHIP (SQUARE TYPE) 0.10
R180	1-216-809-91	s RES, CHIP 100 (1608)
R181	1-218-887-91	s RES, CHIP 47K (1608)
R182	1-218-879-91	s RES, CHIP 22K (1608)
R183	1-218-851-91	s RES, CHIP 1.5K (1608)
R184	1-218-887-91	s RES, CHIP 47K (1608)
R185	1-216-809-91	s RES, CHIP 100 (1608)
R203	1-211-990-91	s RES, CHIP 75 (1608)
R204	1-211-990-91	s RES, CHIP 75 (1608)
R205	1-211-983-91	s RES, CHIP 39 (1608)
R206	1-211-990-91	s RES, CHIP 75 (1608)
R207	1-211-990-91	s RES, CHIP 75 (1608)
R208	1-211-990-91	s RES, CHIP 75 (1608)
R209	1-211-990-91	s RES, CHIP 75 (1608)
R210	1-211-990-91	s RES, CHIP 75 (1608)
R211	1-216-833-91	s RES, CHIP 10K (1608)
R214	1-216-864-91	s CONDUCTOR, CHIP (1608)
R216	1-216-864-91	s CONDUCTOR, CHIP (1608)
R217	1-218-833-91	s RES, CHIP 270 (1608)
R218	1-216-864-91	s CONDUCTOR, CHIP (1608)
R219	1-216-833-91	s RES, CHIP 10K (1608)
R220	1-216-833-91	s RES, CHIP 10K (1608)
R221	1-216-864-91	s CONDUCTOR, CHIP (1608)
R222	1-218-863-91	s RES, CHIP 4.7K (1608)
R223	1-216-864-91	s CONDUCTOR, CHIP (1608)

(BHS BOARD (BKM-62HS))

Ref. No. or Q'ty	Part No.	SP Description
R224	1-218-863-91	s RES, CHIP 4.7K (1608)
R225	1-218-885-91	s RES, CHIP 39K (1608)
R226	1-216-833-91	s RES, CHIP 10K (1608)
R227	1-216-864-91	s CONDUCTOR, CHIP (1608)
R228	1-216-833-91	s RES, CHIP 10K (1608)
R231	1-216-833-91	s RES, CHIP 10K (1608)
R232	1-216-833-91	s RES, CHIP 10K (1608)
R233	1-216-833-91	s RES, CHIP 10K (1608)
R234	1-216-864-91	s CONDUCTOR, CHIP (1608)
R235	1-216-829-91	s RES, CHIP 4.7K (1608)
R243	1-211-985-91	s RES, CHIP 47 (1608)
R300	1-216-809-91	s RES, CHIP 100 (1608)
R301	1-216-809-91	s RES, CHIP 100 (1608)
R302	1-216-805-91	s RES, CHIP 47 (1608)
R303	1-216-805-91	s RES, CHIP 47 (1608)
R304	1-216-805-91	s RES, CHIP 47 (1608)
R305	1-216-805-91	s RES, CHIP 47 (1608)
R306	1-216-829-91	s RES, CHIP 4.7K (1608)
R308	1-216-864-91	s CONDUCTOR, CHIP (1608)
R309	1-216-829-91	s RES, CHIP 4.7K (1608)
R310	1-216-805-91	s RES, CHIP 47 (1608)
R311	1-216-805-91	s RES, CHIP 47 (1608)
R312	1-216-805-91	s RES, CHIP 47 (1608)
R313	1-216-864-91	s CONDUCTOR, CHIP (1608)
R315	1-216-809-91	s RES, CHIP 100 (1608)
R317	1-216-809-91	s RES, CHIP 100 (1608)
R318	1-216-809-91	s RES, CHIP 100 (1608)
R319	1-216-809-91	s RES, CHIP 100 (1608)
R320	1-216-809-91	s RES, CHIP 100 (1608)
R321	1-216-805-91	s RES, CHIP 47 (1608)
R322	1-216-805-91	s RES, CHIP 47 (1608)
R323	1-216-805-91	s RES, CHIP 47 (1608)
R324	1-216-815-91	s RES, CHIP 330 (1608)
R326	1-216-864-91	s CONDUCTOR, CHIP (1608)
R328	1-216-864-91	s CONDUCTOR, CHIP (1608)
R330	1-216-864-91	s CONDUCTOR, CHIP (1608)
R332	1-216-864-91	s CONDUCTOR, CHIP (1608)
R333	1-216-829-91	s RES, CHIP 4.7K (1608)
R334	1-216-829-91	s RES, CHIP 4.7K (1608)
R335	1-216-829-91	s RES, CHIP 4.7K (1608)
R336	1-216-829-91	s RES, CHIP 4.7K (1608)
R337	1-216-833-91	s RES, CHIP 10K (1608)
R338	1-216-805-91	s RES, CHIP 47 (1608)
R339	1-216-805-91	s RES, CHIP 47 (1608)
R340	1-216-805-91	s RES, CHIP 47 (1608)
R341	1-216-805-91	s RES, CHIP 47 (1608)
R400	1-218-823-91	s RES, CHIP 100 (1608)
R401	1-218-861-91	s RES, CHIP 3.9K (1608)
R402	1-218-847-91	s RES, CHIP 1.0K (1608)
R403	1-218-849-91	s RES, CHIP 1.2K (1608)
R404	1-211-982-91	s RES, CHIP 36 (1608)
R405	1-216-825-91	s RES, CHIP 2.2K (1608)
R406	1-216-841-91	s RES, CHIP 47K (1608)
R407	1-218-837-91	s RES, CHIP 390 (1608)
R408	1-216-864-91	s CONDUCTOR, CHIP (1608)
R409	1-216-864-91	s CONDUCTOR, CHIP (1608)
R410	1-218-899-91	s RES, CHIP 150K (1608)
R411	1-218-871-91	s RES, CHIP 10K (1608)
R412	1-218-844-91	s RES, CHIP 750 (1608)

(BHS BOARD (BKM-62HS))

Ref. No. or Q'ty	Part No.	SP Description
R413	1-218-825-91	s RES, CHIP 120 (1608)
R416	1-216-864-91	s CONDUCTOR, CHIP (1608)
R417	1-211-982-91	s RES, CHIP 36 (1608)
R418	1-211-982-91	s RES, CHIP 36 (1608)
R419	1-211-982-91	s RES, CHIP 36 (1608)
R420	1-216-864-91	s CONDUCTOR, CHIP (1608)
R421	1-211-982-91	s RES, CHIP 36 (1608)
R422	1-211-982-91	s RES, CHIP 36 (1608)
R424	1-211-990-91	s RES, CHIP 75 (1608)
R425	1-216-864-91	s CONDUCTOR, CHIP (1608)
R450	1-216-809-91	s RES, CHIP 100 (1608)
R451	1-216-809-91	s RES, CHIP 100 (1608)
R452	1-216-809-91	s RES, CHIP 100 (1608)
R453	1-216-864-91	s CONDUCTOR, CHIP (1608)
R454	1-216-864-91	s CONDUCTOR, CHIP (1608)
R455	1-216-864-91	s CONDUCTOR, CHIP (1608)
R456	1-218-827-91	s RES, CHIP 150 (1608)
R457	1-218-827-91	s RES, CHIP 150 (1608)
R458	1-218-827-91	s RES, CHIP 150 (1608)
R459	1-218-827-91	s RES, CHIP 150 (1608)
R460	1-218-827-91	s RES, CHIP 150 (1608)
R461	1-218-827-91	s RES, CHIP 150 (1608)
R462	1-216-805-91	s RES, CHIP 47 (1608)
R463	1-216-805-91	s RES, CHIP 47 (1608)
R464	1-216-809-91	s RES, CHIP 100 (1608)
R465	1-216-809-91	s RES, CHIP 100 (1608)
R466	1-218-823-91	s RES, CHIP 100 (1608)
R467	1-211-985-91	s RES, CHIP 47 (1608)
R468	1-211-985-91	s RES, CHIP 47 (1608)
R513	1-216-864-91	s CONDUCTOR, CHIP (1608)
R514	1-216-829-91	s RES, CHIP 4.7K (1608)
R516	1-216-864-91	s CONDUCTOR, CHIP (1608)
R517	1-216-864-91	s CONDUCTOR, CHIP (1608)
R518	1-216-864-91	s CONDUCTOR, CHIP (1608)
R519	1-216-864-91	s CONDUCTOR, CHIP (1608)
R521	1-216-833-91	s RES, CHIP 10K (1608)
R522	1-216-829-91	s RES, CHIP 4.7K (1608)
R523	1-216-864-91	s CONDUCTOR, CHIP (1608)
R524	1-216-864-91	s CONDUCTOR, CHIP (1608)
R525	1-216-864-91	s CONDUCTOR, CHIP (1608)
R526	1-216-864-91	s CONDUCTOR, CHIP (1608)
R528	1-216-864-91	s CONDUCTOR, CHIP (1608)
R529	1-216-808-91	s RES, CHIP 82 (1608)
R531	1-216-797-91	s RES, CHIP 10 (1608)
R532	1-216-833-91	s RES, CHIP 10K (1608)
R533	1-216-833-91	s RES, CHIP 10K (1608)
R534	1-216-833-91	s RES, CHIP 10K (1608)
R536	1-218-889-91	s RES, CHIP 56K (1608)
R537	1-218-907-91	s RES, CHIP 330K (1608)
R538	1-218-867-91	s RES, CHIP 6.8K (1608)
R539	1-218-901-91	s RES, CHIP 180K (1608)
R540	1-216-829-91	s RES, CHIP 4.7K (1608)
R541	1-218-873-91	s RES, CHIP 12K (1608)
R542	1-218-879-91	s RES, CHIP 22K (1608)
R543	1-218-875-91	s RES, CHIP 15K (1608)
R544	1-216-821-91	s RES, CHIP 1.0K (1608)
R545	1-218-849-91	s RES, CHIP 1.2K (1608)
R546	1-218-875-91	s RES, CHIP 15K (1608)
R547	1-218-861-91	s RES, CHIP 3.9K (1608)

(BHS BOARD (BKM-62HS))

Ref. No. or Q'ty	Part No.	SP Description
R548	1-218-863-91	s RES, CHIP 4.7K (1608)
R549	1-216-864-91	s CONDUCTOR, CHIP (1608)
R550	1-216-793-91	s RES, CHIP 4.7 (1608)
R551	1-216-833-91	s RES, CHIP 10K (1608)
R552	1-216-833-91	s RES, CHIP 10K (1608)
R553	1-216-793-91	s RES, CHIP 4.7 (1608)
R555	1-216-829-91	s RES, CHIP 4.7K (1608)
R556	1-216-829-91	s RES, CHIP 4.7K (1608)
R557	1-216-829-91	s RES, CHIP 4.7K (1608)
R558	1-216-815-91	s RES, CHIP 330 (1608)
R559	1-216-815-91	s RES, CHIP 330 (1608)
R560	1-216-841-91	s RES, CHIP 47K (1608)
R561	1-216-841-91	s RES, CHIP 47K (1608)
R563	1-216-841-91	s RES, CHIP 47K (1608)
R564	1-216-841-91	s RES, CHIP 47K (1608)
R565	1-218-887-91	s RES, CHIP 47K (1608)
R566	1-216-809-91	s RES, CHIP 100 (1608)
R567	1-219-706-21	s RES, CHIP (SQUARE TYPE) 0.10
R568	1-218-887-91	s RES, CHIP 47K (1608)
R569	1-218-879-91	s RES, CHIP 22K (1608)
R570	1-218-847-91	s RES, CHIP 1.0K (1608)
R571	1-218-887-91	s RES, CHIP 47K (1608)
R573	1-216-809-91	s RES, CHIP 100 (1608)
R574	1-216-809-91	s RES, CHIP 100 (1608)
R575	1-216-829-91	s RES, CHIP 4.7K (1608)
R580	1-216-809-91	s RES, CHIP 100 (1608)
R582	1-216-864-91	s CONDUCTOR, CHIP (1608)
R601	1-218-857-91	s RES, CHIP 2.7K (1608)
R603	1-216-864-91	s CONDUCTOR, CHIP (1608)
R604	1-216-864-91	s CONDUCTOR, CHIP (1608)
R605	1-218-853-91	s RES, CHIP 1.8K (1608)
R606	1-218-829-91	s RES, CHIP 180 (1608)
R609	1-218-877-91	s RES, CHIP 18K (1608)
R610	1-218-841-91	s RES, CHIP 560 (1608)
R611	1-218-837-91	s RES, CHIP 390 (1608)
R612	1-218-837-91	s RES, CHIP 390 (1608)
R613	1-218-873-91	s RES, CHIP 12K (1608)
R615	1-216-801-91	s RES, CHIP 22 (1608)
R616	1-216-801-91	s RES, CHIP 22 (1608)
R617	1-216-809-91	s RES, CHIP 100 (1608)
R618	1-216-864-91	s CONDUCTOR, CHIP (1608)
R650	1-216-864-91	s CONDUCTOR, CHIP (1608)
R651	1-216-801-91	s RES, CHIP 22 (1608)
R654	1-211-990-91	s RES, CHIP 75 (1608)
R655	1-218-846-91	s RES, CHIP 910 (1608)
R656	1-211-991-91	s RES, CHIP 82 (1608)
R701	1-218-857-91	s RES, CHIP 2.7K (1608)
R702	1-216-864-91	s CONDUCTOR, CHIP (1608)
R703	1-218-853-91	s RES, CHIP 1.8K (1608)
R704	1-218-829-91	s RES, CHIP 180 (1608)
R705	1-216-864-91	s CONDUCTOR, CHIP (1608)
R708	1-218-877-91	s RES, CHIP 18K (1608)
R709	1-218-901-91	s RES, CHIP 180K (1608)
R710	1-218-885-91	s RES, CHIP 39K (1608)
R711	1-218-841-91	s RES, CHIP 560 (1608)
R712	1-218-841-91	s RES, CHIP 560 (1608)
R713	1-218-837-91	s RES, CHIP 390 (1608)
R714	1-218-837-91	s RES, CHIP 390 (1608)
R715	1-218-837-91	s RES, CHIP 390 (1608)

(BHS BOARD (BKM-62HS))

Ref. No. or Q'ty	Part No.	SP Description
R716	1-218-873-91	s RES, CHIP 12K (1608)
R717	1-218-871-91	s RES, CHIP 10K (1608)
R720	1-216-801-91	s RES, CHIP 22 (1608)
R721	1-216-801-91	s RES, CHIP 22 (1608)
R722	1-216-809-91	s RES, CHIP 100 (1608)
R723	1-216-864-91	s CONDUCTOR, CHIP (1608)
R750	1-216-864-91	s CONDUCTOR, CHIP (1608)
R751	1-218-837-91	s RES, CHIP 390 (1608)
R753	1-211-990-91	s RES, CHIP 75 (1608)
R754	1-211-991-91	s RES, CHIP 82 (1608)
R755	1-218-846-91	s RES, CHIP 910 (1608)
R801	1-218-857-91	s RES, CHIP 2.7K (1608)
R802	1-216-864-91	s CONDUCTOR, CHIP (1608)
R803	1-218-853-91	s RES, CHIP 1.8K (1608)
R804	1-218-829-91	s RES, CHIP 180 (1608)
R805	1-216-864-91	s CONDUCTOR, CHIP (1608)
R808	1-218-877-91	s RES, CHIP 18K (1608)
R809	1-218-901-91	s RES, CHIP 180K (1608)
R810	1-218-885-91	s RES, CHIP 39K (1608)
R811	1-218-841-91	s RES, CHIP 560 (1608)
R812	1-218-841-91	s RES, CHIP 560 (1608)
R813	1-218-837-91	s RES, CHIP 390 (1608)
R814	1-218-837-91	s RES, CHIP 390 (1608)
R815	1-218-837-91	s RES, CHIP 390 (1608)
R816	1-218-873-91	s RES, CHIP 12K (1608)
R817	1-218-871-91	s RES, CHIP 10K (1608)
R820	1-216-801-91	s RES, CHIP 22 (1608)
R821	1-216-801-91	s RES, CHIP 22 (1608)
R822	1-216-809-91	s RES, CHIP 100 (1608)
R823	1-216-864-91	s CONDUCTOR, CHIP (1608)
R850	1-216-864-91	s CONDUCTOR, CHIP (1608)
R851	1-216-801-91	s RES, CHIP 22 (1608)
R853	1-211-990-91	s RES, CHIP 75 (1608)
R854	1-211-991-91	s RES, CHIP 82 (1608)
R855	1-218-846-91	s RES, CHIP 910 (1608)
R900	1-216-829-91	s RES, CHIP 4.7K (1608)
R902	1-216-864-91	s CONDUCTOR, CHIP (1608)
R908	1-216-864-91	s CONDUCTOR, CHIP (1608)
R910	1-216-801-91	s RES, CHIP 22 (1608)
R911	1-216-801-91	s RES, CHIP 22 (1608)
R912	1-216-801-91	s RES, CHIP 22 (1608)
R913	1-216-797-91	s RES, CHIP 10 (1608)
R914	1-216-801-91	s RES, CHIP 22 (1608)
R915	1-216-801-91	s RES, CHIP 22 (1608)
R916	1-216-801-91	s RES, CHIP 22 (1608)
R917	1-216-807-91	s RES, CHIP 68 (1608)
R918	1-216-807-91	s RES, CHIP 68 (1608)
R919	1-216-807-91	s RES, CHIP 68 (1608)
R920	1-216-807-91	s RES, CHIP 68 (1608)
R921	1-216-807-91	s RES, CHIP 68 (1608)
R922	1-216-807-91	s RES, CHIP 68 (1608)
R923	1-216-807-91	s RES, CHIP 68 (1608)
R924	1-216-807-91	s RES, CHIP 68 (1608)
R925	1-216-801-91	s RES, CHIP 22 (1608)
R926	1-216-801-91	s RES, CHIP 22 (1608)
R927	1-216-807-91	s RES, CHIP 68 (1608)
R928	1-216-807-91	s RES, CHIP 68 (1608)
R929	1-216-801-91	s RES, CHIP 22 (1608)
R930	1-216-807-91	s RES, CHIP 68 (1608)

(BHS BOARD (BKM-62HS))

Ref. No. or Q'ty	Part No.	SP Description
R931	1-216-801-91	s RES, CHIP 22 (1608)
R932	1-216-837-91	s RES, CHIP 22K (1608)
R933	1-216-805-91	s RES, CHIP 47 (1608)
R934	1-216-805-91	s RES, CHIP 47 (1608)
R935	1-216-825-91	s RES, CHIP 2.2K (1608)
R936	1-216-809-91	s RES, CHIP 100 (1608)
R937	1-216-864-91	s CONDUCTOR, CHIP (1608)
R938	1-216-809-91	s RES, CHIP 100 (1608)
R939	1-216-805-91	s RES, CHIP 47 (1608)
R940	1-216-837-91	s RES, CHIP 22K (1608)
R941	1-216-837-91	s RES, CHIP 22K (1608)
R942	1-216-837-91	s RES, CHIP 22K (1608)
R943	1-216-833-91	s RES, CHIP 10K (1608)
RB100	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB101	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB102	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB103	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB104	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB200	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB201	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB202	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB203	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB204	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB300	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB301	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB302	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB303	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB304	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB305	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB306	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB307	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB308	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB309	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB310	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB311	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB312	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB313	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB400	1-234-795-21	s RES, NETWORK 0X4 (2010)
RB401	1-234-795-21	s RES, NETWORK 0X4 (2010)
RB402	1-234-795-21	s RES, NETWORK 0X4 (2010)
RB403	1-234-795-21	s RES, NETWORK 0X4 (2010)
RB404	1-234-795-21	s RES, NETWORK 0X4 (2010)
RB405	1-234-795-21	s RES, NETWORK 0X4 (2010)
RB900	1-233-414-21	s RES, CHIP NETWORK 4.7K (3216)
RB901	1-233-414-21	s RES, CHIP NETWORK 4.7K (3216)
RB902	1-233-416-21	s RES, CHIP NETWORK 22K (3216)
RB903	1-233-415-21	s RES, CHIP NETWORK 10K (3216)
RB904	1-233-416-21	s RES, CHIP NETWORK 22K (3216)
RB905	1-233-416-21	s RES, CHIP NETWORK 22K (3216)
RB906	1-233-423-21	s RES, CHIP NETWORK 47 (3216)
RB907	1-233-880-21	s RES, NETWORK 68 (3216)
RB908	1-233-880-21	s RES, NETWORK 68 (3216)
RB909	1-233-575-21	s RES, CHIP NETWORK 22 (3216)
RB910	1-233-575-21	s RES, CHIP NETWORK 22 (3216)
RB911	1-233-880-21	s RES, NETWORK 68 (3216)
RB912	1-233-880-21	s RES, NETWORK 68 (3216)
RB913	1-233-423-21	s RES, CHIP NETWORK 47 (3216)
RB914	1-233-423-21	s RES, CHIP NETWORK 47 (3216)

(BHS BOARD (BKM-62HS))

Ref. No. or Q'ty	Part No.	SP Description
RB915	1-233-880-21	s RES, NETWORK 68 (3216)
RB916	1-233-578-21	s RES, CHIP NETWORK 47K (3216)
RB917	1-233-578-21	s RES, CHIP NETWORK 47K (3216)
RB918	1-233-578-21	s RES, CHIP NETWORK 47K (3216)
S520	1-771-709-21	s SWITCH, SLIDE
T401	1-435-472-21	s TRANSFORMER, HIGH-FREQUENCY
TP150	1-535-877-22	s CHIP, CHECKER
TP450	1-535-877-22	s CHIP, CHECKER
TP451	1-535-877-22	s CHIP, CHECKER
TP452	1-535-877-22	s CHIP, CHECKER
TP453	1-535-877-22	s CHIP, CHECKER
TP454	1-535-877-22	s CHIP, CHECKER
TP455	1-535-877-22	s CHIP, CHECKER
TP520	1-535-877-22	s CHIP, CHECKER
TP901	1-535-877-22	s CHIP, CHECKER
TP902	1-535-877-22	s CHIP, CHECKER
X100	1-795-872-11	s OSCILLATOR
X200	1-795-872-11	s OSCILLATOR
X520	1-795-984-11	s OSCILLATOR, CRYSTAL
X900	1-795-984-11	s OSCILLATOR, CRYSTAL

BX BOARD (BKM-68X)

Ref. No. or Q'ty	Part No.	SP Description
C100	1-162-914-91	s CAP, CERAMIC 9.0PF CH 1608
C102	1-162-914-91	s CAP, CERAMIC 9.0PF CH 1608
C103	1-113-701-21	s CAP, ELECT (NONPOLAR) 22MF
C105	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C106	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C107	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C109	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C110	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C200	1-162-914-91	s CAP, CERAMIC 9.0PF CH 1608
C201	1-162-914-91	s CAP, CERAMIC 9.0PF CH 1608
C202	1-113-701-21	s CAP, ELECT (NONPOLAR) 22MF
C203	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C204	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C205	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C206	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C207	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C210	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C211	1-165-872-21	s CAP, ELECT 47MF (5.0X6.5)
C212	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C213	1-165-872-21	s CAP, ELECT 47MF (5.0X6.5)
C214	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C215	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C216	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C217	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C218	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C219	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C220	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C221	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C222	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C223	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C224	1-162-910-91	s CAP, CERAMIC 5.0PF CH 1608
C225	1-162-911-91	s CAP, CERAMIC 6.0PF CH 1608
C226	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C227	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C228	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C229	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C230	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C231	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C232	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C233	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C234	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C235	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C236	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C237	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C238	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C239	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C240	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C241	1-162-913-91	s CAP, CERAMIC 8.0PF CH 1608
C244	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C245	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C260	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C261	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C262	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C263	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C264	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C265	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C266	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C267	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C268	1-162-970-91	s CAP, CERAMIC 10000PF B 1608

(BX BOARD (BKM-68X))

Ref. No. or Q'ty	Part No.	SP	Description
C366	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C367	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C368	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C369	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C370	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C371	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C372	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C373	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C375	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C376	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C377	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C378	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C379	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C400	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C401	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C402	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C403	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C404	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C405	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C406	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C407	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C408	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C409	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C410	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C411	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C412	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C413	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C414	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C416	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C417	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C418	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C419	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C420	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C421	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C422	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C423	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C424	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C425	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C426	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C427	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C428	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C429	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C430	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C431	1-162-911-91	s	CAP, CERAMIC 6.0PF CH 1608
C432	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C433	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C434	1-162-909-91	s	CAP, CERAMIC 4.0PF CH 1608
C435	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C436	1-162-970-91	s	CAP, CERAMIC 10000PF B 1608
C437	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C438	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C439	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C440	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C441	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C442	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C443	1-126-392-21	s	CAP, CHIP ELECT 100MF(6.3X5.7)
C444	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C445	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C446	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608

(BX BOARD (BKM-68X))

Ref. No. or Q'ty	Part No.	SP Description
C447	1-126-392-21 s	CAP, CHIP ELECT 100MF(6.3X5.7)
C448	1-126-392-21 s	CAP, CHIP ELECT 100MF(6.3X5.7)
C449	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C450	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C451	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C452	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C453	1-162-911-91 s	CAP, CERAMIC 6.0PF CH 1608
C455	1-162-910-91 s	CAP, CERAMIC 5.0PF CH 1608
C456	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C457	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C478	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C479	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C480	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C481	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C482	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C483	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C484	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C485	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C486	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C487	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C488	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C489	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C490	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C491	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C492	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C493	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C494	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C495	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C496	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C497	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C498	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C499	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C500	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C501	1-126-392-21 s	CAP, CHIP ELECT 100MF(6.3X5.7)
C502	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C503	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C504	1-126-392-21 s	CAP, CHIP ELECT 100MF(6.3X5.7)
C600	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C601	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C602	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C603	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C604	1-126-392-21 s	CAP, CHIP ELECT 100MF(6.3X5.7)
C605	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C606	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C607	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C608	1-126-392-21 s	CAP, CHIP ELECT 100MF(6.3X5.7)
C609	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C610	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C611	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C612	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C613	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C614	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C615	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C616	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C617	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C618	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C619	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C620	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C621	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608

(BX BOARD (BKM-68X))

Ref. No. or Q'ty	Part No.	SP Description
C622	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C623	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C624	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C625	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C626	1-126-392-21 s	CAP, CHIP ELECT 100MF(6.3X5.7)
C627	1-126-392-21 s	CAP, CHIP ELECT 100MF(6.3X5.7)
C628	1-126-392-21 s	CAP, CHIP ELECT 100MF(6.3X5.7)
C629	1-126-392-21 s	CAP, CHIP ELECT 100MF(6.3X5.7)
C630	1-164-230-91 s	CAP, CERAMIC 220PF CH 1608
C650	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C651	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C652	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C653	1-162-922-91 s	CAP, CERAMIC 39PF CH 1608
C660	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C670	1-131-661-21 s	CAP, CHIP ELECT 100MF(6.3X5.7)
C671	1-131-661-21 s	CAP, CHIP ELECT 100MF(6.3X5.7)
C672	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C673	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C674	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C675	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C676	1-135-341-21 s	CAP, ELECT 330MF (10X8)
C677	1-135-341-21 s	CAP, ELECT 330MF (10X8)
C680	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C681	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C682	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C700	1-165-875-91 s	CAP, CHIP CERAMIC 10MF B 3216
C701	1-162-914-91 s	CAP, CERAMIC 9.0PF CH 1608
C702	1-162-914-91 s	CAP, CERAMIC 9.0PF CH 1608
C703	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C704	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C705	1-126-392-21 s	CAP, CHIP ELECT 100MF(6.3X5.7)
C706	1-126-392-21 s	CAP, CHIP ELECT 100MF(6.3X5.7)
C707	1-113-701-21 s	CAP, ELECT (NONPOLAR) 22MF
C708	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C709	1-113-701-21 s	CAP, ELECT (NONPOLAR) 22MF
C710	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C711	1-126-392-21 s	CAP, CHIP ELECT 100MF(6.3X5.7)
C712	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C713	1-125-837-91 s	CAP, CHIP CERAMIC 1MF B (1608)
C714	1-100-566-91 s	CAP, CHIP CERAMIC 0.1MF B 1608
C715	1-126-392-21 s	CAP, CHIP ELECT 100MF(6.3X5.7)
C716	1-126-392-21 s	CAP, CHIP ELECT 100MF(6.3X5.7)
C717	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C718	1-126-392-21 s	CAP, CHIP ELECT 100MF(6.3X5.7)
C719	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C720	1-126-392-21 s	CAP, CHIP ELECT 100MF(6.3X5.7)
C721	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C722	1-126-392-21 s	CAP, CHIP ELECT 100MF(6.3X5.7)
C723	1-162-970-91 s	CAP, CERAMIC 10000PF B 1608
C724	1-126-392-21 s	CAP, CHIP ELECT 100MF(6.3X5.7)
C725	1-162-927-91 s	CAP, CERAMIC 100PF CH 1608
C726	1-162-927-91 s	CAP, CERAMIC 100PF CH 1608
C727	1-164-218-91 s	CAP, CERAMIC 180PF CH 1608
C729	1-164-218-91 s	CAP, CERAMIC 180PF CH 1608
C730	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C731	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C733	1-162-927-91 s	CAP, CERAMIC 100PF CH 1608
C734	1-128-994-21 s	CAP, ELECT 47MF (5.3X5.5)
C735	1-128-994-21 s	CAP, ELECT 47MF (5.3X5.5)

(BX BOARD (BKM-68X))

Ref. No. or Q'ty	Part No.	SP Description
C736	1-162-923-91	s CAP, CERAMIC 47PF CH 1608
C737	1-162-923-91	s CAP, CERAMIC 47PF CH 1608
C738	1-135-344-21	s CAP, ELECT 270MF (10X8)
C739	1-164-390-91	s CAP, CERAMIC 330PF CH 1608
C741	1-125-891-91	s CAP, CHIP CERAMIC0.47MF B 1608
C742	1-125-837-91	s CAP, CHIP CERAMIC 1MF B (1608)
C743	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C744	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C745	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C747	1-164-230-91	s CAP, CERAMIC 220PF CH 1608
C748	1-162-927-91	s CAP, CERAMIC 100PF CH 1608
C749	1-162-966-91	s CAP, CERAMIC 2200PF B 1608
C750	1-162-968-91	s CAP, CHIP CERAMIC 4700PF B 1608
C751	1-162-966-91	s CAP, CERAMIC 2200PF B 1608
C752	1-125-837-91	s CAP, CHIP CERAMIC 1MF B (1608)
C753	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C754	1-137-894-21	s CAP, ELECT (CHIP TYPE) 470MF
C755	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C800	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C801	1-125-837-91	s CAP, CHIP CERAMIC 1MF B (1608)
C803	1-115-467-91	s CAP, CHIP CERAMIC0.22MF B 1608
C804	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C805	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C806	1-115-416-91	s CAP, CHIP CERAMIC1000PF CH 1608
C807	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C808	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C809	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C810	1-162-927-91	s CAP, CERAMIC 100PF CH 1608
C811	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C812	1-162-927-91	s CAP, CERAMIC 100PF CH 1608
C813	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C814	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C815	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C816	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C817	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C818	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C822	1-126-398-21	s CAP, CHIP ELECT 4.7MF (4X5.7)
C824	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C825	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C826	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C827	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C828	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C829	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C830	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C831	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C832	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C833	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C834	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C835	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C836	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C837	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C838	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C839	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C840	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C841	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C842	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C843	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C844	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C845	1-131-661-21	s CAP, CHIP ELECT 100MF(6.3X5.7)

(BX BOARD (BKM-68X))

Ref. No. or Q'ty	Part No.	SP Description
C846	1-131-661-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C847	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C848	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C849	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C850	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C851	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C852	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C853	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C854	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C855	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C856	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C857	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C858	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C859	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C860	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C861	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C862	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C863	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C864	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C865	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C866	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C867	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C868	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C869	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C870	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C871	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C872	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C873	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C874	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C900	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C901	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C902	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C903	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C904	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C906	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C907	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C908	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C909	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C910	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C911	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C912	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C913	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C914	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C915	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C916	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C917	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C918	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C919	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C920	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C921	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C922	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C923	1-126-392-21	s CAP, CHIP ELECT 100MF(6.3X5.7)
C924	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C925	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C926	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C927	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C928	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C929	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
C930	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608

(BX BOARD (BKM-68X))

Ref. No. or Q'ty	Part No.	SP Description
C932	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C933	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C934	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C950	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C951	1-162-970-91	s CAP, CERAMIC 10000PF B 1608
CN100	1-793-324-11	o CONNECTOR, COAXIAL (BNC TYPE)
CN101	1-793-324-11	o CONNECTOR, COAXIAL (BNC TYPE)
CN174	1-695-208-21	o PIN, CONNECTOR (PC BOARD) 7P
CN175	1-695-208-21	o PIN, CONNECTOR (PC BOARD) 7P
CN200	1-793-324-11	o CONNECTOR, COAXIAL (BNC TYPE)
CN201	1-793-324-11	o CONNECTOR, COAXIAL (BNC TYPE)
CN300	1-793-324-11	o CONNECTOR, COAXIAL (BNC TYPE)
CN301	1-793-324-11	o CONNECTOR, COAXIAL (BNC TYPE)
CN700	1-793-324-11	o CONNECTOR, COAXIAL (BNC TYPE)
CN701	1-793-324-11	o CONNECTOR, COAXIAL (BNC TYPE)
CN900	1-764-080-21	o PIN, CONNECTOR (PC BOARD) 8P
CN985	1-817-753-11	o CONNECTOR, BOARD TO BOARD 100P
CN986	1-817-753-11	o CONNECTOR, BOARD TO BOARD 100P
D101	8-719-820-42	s DIODE 1SS302-TE85L
D200	8-719-820-42	s DIODE 1SS302-TE85L
D300	8-719-820-42	s DIODE 1SS302-TE85L
D670	8-719-404-50	s DIODE MA111-TX
D671	8-719-404-50	s DIODE MA111-TX
D700	8-719-820-42	s DIODE 1SS302-TE85L
D701	8-719-820-42	s DIODE 1SS302-TE85L
D702	8-719-404-50	s DIODE MA111-TX
D703	8-719-404-50	s DIODE MA111-TX
D704	8-719-404-50	s DIODE MA111-TX
D705	8-719-404-50	s DIODE MA111-TX
D706	8-719-404-50	s DIODE MA111-TX
D707	8-719-404-50	s DIODE MA111-TX
D708	8-719-404-50	s DIODE MA111-TX
D709	8-719-404-50	s DIODE MA111-TX
D710	8-719-404-50	s DIODE MA111-TX
D711	8-719-404-50	s DIODE MA111-TX
D712	8-719-404-50	s DIODE MA111-TX
D713	8-719-404-50	s DIODE MA111-TX
D800	8-719-064-52	s DIODE CL-191YG-CD-T
D801	8-719-404-50	s DIODE MA111-TX
D802	8-719-404-50	s DIODE MA111-TX
D900	8-719-064-52	s DIODE CL-191YG-CD-T
D901	8-719-404-50	s DIODE MA111-TX
DL210	1-411-452-21	s DELAY LINE
DL211	1-411-452-21	s DELAY LINE
DL212	1-416-476-21	s DELAY LINE
DL213	1-234-920-21	s DELAY LINE
DL310	1-411-452-21	s DELAY LINE
DL311	1-411-452-21	s DELAY LINE
DL312	1-416-476-21	s DELAY LINE
DL313	1-234-920-21	s DELAY LINE
DL400	1-416-476-21	s DELAY LINE
DL401	1-234-920-21	s DELAY LINE
FB800	1-469-379-21	s FERRITE, EMI (SMD) (2012)
FL400	1-411-451-21	s DELAY LINE
FL401	1-411-451-21	s DELAY LINE
FL402	1-416-475-21	s DELAY LINE
FL403	1-411-450-21	s DELAY LINE
FL404	1-411-450-21	s DELAY LINE

(BX BOARD (BKM-68X))

Ref. No. or Q'ty	Part No.	SP Description
FL405	1-416-475-21	s DELAY LINE
FL985	1-234-493-21	s FILTER, EMI
IC100	8-759-573-91	s IC AD8055ARTZ-REEL7
IC200	8-759-573-91	s IC AD8055ARTZ-REEL7
IC209	8-759-573-91	s IC AD8055ARTZ-REEL7
IC210	8-759-564-49	s IC TC7W53FU (TE12R)
IC211	8-759-573-91	s IC AD8055ARTZ-REEL7
IC212	8-759-573-91	s IC AD8055ARTZ-REEL7
IC213	8-759-573-91	s IC AD8055ARTZ-REEL7
IC214	8-759-573-91	s IC AD8055ARTZ-REEL7
IC215	8-759-573-91	s IC AD8055ARTZ-REEL7
IC216	8-759-523-02	s IC TC74HC4053AFT (EL)
IC260	8-759-564-49	s IC TC7W53FU (TE12R)
IC261	8-759-573-91	s IC AD8055ARTZ-REEL7
IC262	8-759-669-73	s IC TL082CPWR
IC263	8-759-523-02	s IC TC74HC4053AFT (EL)
IC264	8-759-669-73	s IC TL082CPWR
IC265	8-759-669-73	s IC TL082CPWR
IC300	8-759-573-91	s IC AD8055ARTZ-REEL7
IC309	8-759-573-91	s IC AD8055ARTZ-REEL7
IC310	8-759-564-49	s IC TC7W53FU (TE12R)
IC311	8-759-573-91	s IC AD8055ARTZ-REEL7
IC312	8-759-573-91	s IC AD8055ARTZ-REEL7
IC313	8-759-573-91	s IC AD8055ARTZ-REEL7
IC314	8-759-573-91	s IC AD8055ARTZ-REEL7
IC315	8-759-573-91	s IC AD8055ARTZ-REEL7
IC316	8-759-523-02	s IC TC74HC4053AFT (EL)
IC360	8-759-564-49	s IC TC7W53FU (TE12R)
IC361	8-759-573-91	s IC AD8055ARTZ-REEL7
IC362	8-759-669-73	s IC TL082CPWR
IC363	8-759-523-02	s IC TC74HC4053AFT (EL)
IC364	8-759-669-73	s IC TL082CPWR
IC365	8-759-669-73	s IC TL082CPWR
IC400	8-759-669-73	s IC TL082CPWR
IC401	8-759-564-49	s IC TC7W53FU (TE12R)
IC402	6-707-130-01	s IC LMH6503MAX/NOPB
IC403	8-759-523-02	s IC TC74HC4053AFT (EL)
IC404	8-759-523-02	s IC TC74HC4053AFT (EL)
IC405	8-759-573-91	s IC AD8055ARTZ-REEL7
IC406	8-759-573-91	s IC AD8055ARTZ-REEL7
IC407	8-759-573-91	s IC AD8055ARTZ-REEL7
IC408	8-759-573-91	s IC AD8055ARTZ-REEL7
IC409	8-759-573-91	s IC AD8055ARTZ-REEL7
IC410	8-752-068-20	s IC CXA1521M-TH
IC411	8-759-669-73	s IC TL082CPWR
IC412	8-759-573-91	s IC AD8055ARTZ-REEL7
IC480	8-759-564-49	s IC TC7W53FU (TE12R)
IC481	8-759-573-91	s IC AD8055ARTZ-REEL7
IC482	8-759-669-73	s IC TL082CPWR
IC483	8-759-523-02	s IC TC74HC4053AFT (EL)
IC484	8-759-669-73	s IC TL082CPWR
IC485	8-759-669-73	s IC TL082CPWR
IC486	6-706-773-01	s IC AD8075ARUZ-REEL7
IC600	8-759-523-95	s IC TC74VHC74FT (EL)
IC601	8-759-564-49	s IC TC7W53FU (TE12R)
IC602	8-759-276-28	s IC LM393PS-E20
IC603	8-759-523-02	s IC TC74HC4053AFT (EL)
IC604	8-759-491-46	s IC TC74VHCT04AFT (EL)

(BX BOARD (BKM-68X))

Ref. No. or Q'ty	Part No.	SP	Description
IC605	8-759-573-91	s	IC AD8055ARTZ-REEL7
IC606	8-759-573-91	s	IC AD8055ARTZ-REEL7
IC660	8-759-491-46	s	IC TC74VHCT04AFT (EL)
IC670	6-705-469-01	s	IC BA50BC0FP-E2
IC671	8-759-539-89	s	IC LM2990SX-5.0
IC700	8-759-523-02	s	IC TC74HC4053AFT (EL)
IC801	8-759-669-75	s	IC TLC2932IPWRG4
IC802	6-704-006-01	s	IC BR24L64F-WE2
IC803	8-759-491-46	s	IC TC74VHCT04AFT (EL)
IC807	6-705-468-01	s	IC BA33BC0FP-E2
IC808	6-700-394-01	s	IC BA25BC0FP-E2
IC809	6-706-488-01	s	IC TC7SH14FU (T5RSOYJF)
IC900	6-708-748-01	s	IC BD4828FVE-TR
IC901	8-759-679-54	s	IC SN74LVC14APWR
IC902	6-705-468-01	s	IC BA33BC0FP-E2
IC903	6-706-489-01	s	IC TC7SH32FU (T5RSOYJF)
IC904	6-709-436-01	s	IC LC4128V-5TN100CA1353
IC905	8-759-679-54	s	IC SN74LVC14APWR
IC906	8-759-679-54	s	IC SN74LVC14APWR
IC907	8-759-573-97	s	IC SN74LVC541APWR
IC908	8-759-679-54	s	IC SN74LVC14APWR
IC909	8-759-592-49	s	IC TC7SZ125FU (TE85R)
IC910	6-706-488-01	s	IC TC7SH14FU (T5RSOYJF)
IC911	6-708-748-01	s	IC BD4828FVE-TR
IC912	8-759-592-46	s	IC TC7SZ05FU (TE85R)
IC950	8-759-497-44	s	IC TC7WH125FU (TE12R)
L101	1-414-576-41	s	INDUCTOR, CHIP (J) 47NH
L102	1-414-576-41	s	INDUCTOR, CHIP (J) 47NH
L200	1-414-576-41	s	INDUCTOR, CHIP (J) 47NH
L201	1-414-576-41	s	INDUCTOR, CHIP (J) 47NH
L300	1-414-576-41	s	INDUCTOR, CHIP (J) 47NH
L301	1-414-576-41	s	INDUCTOR, CHIP (J) 47NH
L700	1-414-576-41	s	INDUCTOR, CHIP (J) 47NH
L701	1-414-577-41	s	INDUCTOR, CHIP (J) 56NH
L800	1-412-955-21	s	INDUCTOR, SMALL TYPE 22UH 2520
L900	1-412-955-21	s	INDUCTOR, SMALL TYPE 22UH 2520
PS985	1-576-124-21	s	LINK, IC (1A/72V)
PS986	1-576-124-21	s	LINK, IC (1A/72V)
PS987	1-576-677-21	s	RINK, IC (4A/72V)
PS988	1-576-677-21	s	RINK, IC (4A/72V)
PS989	1-576-677-21	s	RINK, IC (4A/72V)
Q209	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q210	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q211	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q212	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q212	8-729-143-09	s	TRANSISTOR 2SA1610-T1Y33
Q213	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q213	8-729-143-09	s	TRANSISTOR 2SA1610-T1Y33
Q214	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q215	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q216	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q217	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q260	8-729-026-53	s	TRANSISTOR 2SA1576A-T106-QR
Q261	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q309	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q310	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q311	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q312	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34

(BX BOARD (BKM-68X))

Ref. No. or Q'ty	Part No.	SP	Description
Q312	8-729-143-09	s	TRANSISTOR 2SA1610-T1Y33
Q313	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q313	8-729-143-09	s	TRANSISTOR 2SA1610-T1Y33
Q314	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q315	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q316	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q317	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q360	8-729-026-53	s	TRANSISTOR 2SA1576A-T106-QR
Q361	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q400	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q401	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q402	8-729-026-53	s	TRANSISTOR 2SA1576A-T106-QR
Q403	8-729-026-53	s	TRANSISTOR 2SA1576A-T106-QR
Q404	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q405	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q406	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q407	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q407	8-729-143-09	s	TRANSISTOR 2SA1610-T1Y33
Q408	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q408	8-729-143-09	s	TRANSISTOR 2SA1610-T1Y33
Q409	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q409	8-729-143-09	s	TRANSISTOR 2SA1610-T1Y33
Q410	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q411	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q412	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q413	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q414	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q414	8-729-143-09	s	TRANSISTOR 2SA1610-T1Y33
Q415	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q415	8-729-143-09	s	TRANSISTOR 2SA1610-T1Y33
Q416	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q416	8-729-143-09	s	TRANSISTOR 2SA1610-T1Y33
Q417	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q480	8-729-026-53	s	TRANSISTOR 2SA1576A-T106-QR
Q481	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q600	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q601	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q602	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q603	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q604	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q605	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q606	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q650	8-729-029-04	s	TRANSISTOR DTC123JUA-T106
Q651	8-729-029-04	s	TRANSISTOR DTC123JUA-T106
Q652	8-729-029-04	s	TRANSISTOR DTC123JUA-T106
Q680	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q681	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q682	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q700	8-729-905-38	s	TRANSISTOR 2SC4081T106R
Q701	8-729-920-60	s	TRANSISTOR IMX2-T108
Q702	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q702	8-729-143-09	s	TRANSISTOR 2SA1610-T1Y33
Q703	8-729-140-86	s	TRANSISTOR 2SA1610-T1Y34
Q703	8-729-143-09	s	TRANSISTOR 2SA1610-T1Y33
Q704	8-729-920-60	s	TRANSISTOR IMX2-T108
Q705	8-729-026-53	s	TRANSISTOR 2SA1576A-T106-QR
Q706	8-729-026-53	s	TRANSISTOR 2SA1576A-T106-QR
Q707	8-729-026-53	s	TRANSISTOR 2SA1576A-T106-QR
Q708	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35

(BX BOARD (BKM-68X))

Ref. No. or Q'ty	Part No.	SP Description
Q709	8-729-905-38	s TRANSISTOR 2SC4081T106R
Q710	8-729-144-81	s TRANSISTOR 2SC4176T1B33B34B35
Q711	8-729-144-81	s TRANSISTOR 2SC4176T1B33B34B35
Q712	6-550-154-01	s TRANSISTOR IMT2AT108
Q713	8-729-920-60	s TRANSISTOR IMX2-T108
Q714	6-550-154-01	s TRANSISTOR IMT2AT108
Q715	8-729-144-81	s TRANSISTOR 2SC4176T1B33B34B35
Q716	8-729-144-81	s TRANSISTOR 2SC4176T1B33B34B35
Q717	8-729-026-53	s TRANSISTOR 2SA1576A-T106-QR
Q718	8-729-140-86	s TRANSISTOR 2SA1610-T1Y34
Q718	8-729-143-09	s TRANSISTOR 2SA1610-T1Y33
Q719	8-729-026-53	s TRANSISTOR 2SA1576A-T106-QR
Q720	8-729-905-38	s TRANSISTOR 2SC4081T106R
Q721	8-729-905-38	s TRANSISTOR 2SC4081T106R
Q722	8-729-905-38	s TRANSISTOR 2SC4081T106R
Q723	8-729-905-38	s TRANSISTOR 2SC4081T106R
Q724	8-729-026-53	s TRANSISTOR 2SA1576A-T106-QR
Q725	8-729-905-38	s TRANSISTOR 2SC4081T106R
Q726	8-729-026-53	s TRANSISTOR 2SA1576A-T106-QR
Q727	8-729-905-38	s TRANSISTOR 2SC4081T106R
Q728	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q729	8-729-140-86	s TRANSISTOR 2SA1610-T1Y34
Q729	8-729-143-09	s TRANSISTOR 2SA1610-T1Y33
Q800	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q801	8-729-028-91	s TRANSISTOR DTA144EUA-T106
Q802	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q803	8-729-029-04	s TRANSISTOR DTC123JUA-T106
Q804	8-729-029-04	s TRANSISTOR DTC123JUA-T106
R100	1-216-841-91	s RES, CHIP 47K (1608)
R101	1-216-809-91	s RES, CHIP 100 (1608)
R102	1-216-801-91	s RES, CHIP 22 (1608)
R103	1-216-797-91	s RES, CHIP 10 (1608)
R200	1-216-841-91	s RES, CHIP 47K (1608)
R201	1-216-809-91	s RES, CHIP 100 (1608)
R202	1-216-801-91	s RES, CHIP 22 (1608)
R203	1-216-864-91	s CONDUCTOR, CHIP (1608)
R205	1-216-809-91	s RES, CHIP 100 (1608)
R206	1-216-864-91	s CONDUCTOR, CHIP (1608)
R207	1-216-864-91	s CONDUCTOR, CHIP (1608)
R208	1-216-841-91	s RES, CHIP 47K (1608)
R209	1-216-841-91	s RES, CHIP 47K (1608)
R210	1-216-805-91	s RES, CHIP 47 (1608)
R211	1-216-864-91	s CONDUCTOR, CHIP (1608)
R212	1-216-864-91	s CONDUCTOR, CHIP (1608)
R213	1-216-801-91	s RES, CHIP 22 (1608)
R214	1-216-801-91	s RES, CHIP 22 (1608)
R215	1-216-809-91	s RES, CHIP 100 (1608)
R216	1-216-809-91	s RES, CHIP 100 (1608)
R219	1-216-825-91	s RES, CHIP 2.2K (1608)
R220	1-216-825-91	s RES, CHIP 2.2K (1608)
R221	1-218-853-91	s RES, CHIP 1.8K (1608)
R222	1-218-827-91	s RES, CHIP 150 (1608)
R223	1-218-853-91	s RES, CHIP 1.8K (1608)
R224	1-218-827-91	s RES, CHIP 150 (1608)
R225	1-218-847-91	s RES, CHIP 1.0K (1608)
R226	1-218-847-91	s RES, CHIP 1.0K (1608)
R227	1-218-847-91	s RES, CHIP 1.0K (1608)
R228	1-218-847-91	s RES, CHIP 1.0K (1608)

(BX BOARD (BKM-68X))

Ref. No. or Q'ty	Part No.	SP Description
R229	1-218-827-91	s RES, CHIP 150 (1608)
R230	1-216-809-91	s RES, CHIP 100 (1608)
R231	1-216-809-91	s RES, CHIP 100 (1608)
R232	1-218-827-91	s RES, CHIP 150 (1608)
R233	1-218-855-91	s RES, CHIP 2.2K (1608)
R234	1-218-871-91	s RES, CHIP 10K (1608)
R235	1-216-805-91	s RES, CHIP 47 (1608)
R236	1-218-867-91	s RES, CHIP 6.8K (1608)
R237	1-218-842-91	s RES, CHIP 620 (1608)
R238	1-218-867-91	s RES, CHIP 6.8K (1608)
R239	1-218-846-91	s RES, CHIP 910 (1608)
R240	1-216-809-91	s RES, CHIP 100 (1608)
R241	1-216-809-91	s RES, CHIP 100 (1608)
R242	1-218-849-91	s RES, CHIP 1.2K (1608)
R243	1-218-855-91	s RES, CHIP 2.2K (1608)
R244	1-218-834-91	s RES, CHIP 300 (1608)
R245	1-218-834-91	s RES, CHIP 300 (1608)
R246	1-218-850-91	s RES, CHIP 1.3K (1608)
R247	1-218-850-91	s RES, CHIP 1.3K (1608)
R248	1-216-825-91	s RES, CHIP 2.2K (1608)
R249	1-216-825-91	s RES, CHIP 2.2K (1608)
R250	1-218-838-91	s RES, CHIP 430 (1608)
R251	1-216-809-91	s RES, CHIP 100 (1608)
R252	1-216-809-91	s RES, CHIP 100 (1608)
R253	1-216-825-91	s RES, CHIP 2.2K (1608)
R254	1-216-825-91	s RES, CHIP 2.2K (1608)
R255	1-218-837-91	s RES, CHIP 390 (1608)
R256	1-218-837-91	s RES, CHIP 390 (1608)
R257	1-218-835-91	s RES, CHIP 330 (1608)
R258	1-216-864-91	s CONDUCTOR, CHIP (1608)
R259	1-216-864-91	s CONDUCTOR, CHIP (1608)
R260	1-216-801-91	s RES, CHIP 22 (1608)
R261	1-216-809-91	s RES, CHIP 100 (1608)
R262	1-216-797-91	s RES, CHIP 10 (1608)
R263	1-216-801-91	s RES, CHIP 22 (1608)
R264	1-216-805-91	s RES, CHIP 47 (1608)
R265	1-218-847-91	s RES, CHIP 1.0K (1608)
R267	1-218-863-91	s RES, CHIP 4.7K (1608)
R268	1-216-864-91	s CONDUCTOR, CHIP (1608)
R269	1-216-864-91	s CONDUCTOR, CHIP (1608)
R270	1-218-861-91	s RES, CHIP 3.9K (1608)
R272	1-216-805-91	s RES, CHIP 47 (1608)
R273	1-216-813-91	s RES, CHIP 220 (1608)
R274	1-216-823-91	s RES, CHIP 1.5K (1608)
R275	1-216-805-91	s RES, CHIP 47 (1608)
R276	1-218-859-91	s RES, CHIP 3.3K (1608)
R277	1-216-823-91	s RES, CHIP 1.5K (1608)
R278	1-218-871-91	s RES, CHIP 10K (1608)
R279	1-216-805-91	s RES, CHIP 47 (1608)
R280	1-218-895-91	s RES, CHIP 100K (1608)
R281	1-218-895-91	s RES, CHIP 100K (1608)
R282	1-216-813-91	s RES, CHIP 220 (1608)
R283	1-218-876-91	s RES, CHIP 16K (1608)
R284	1-218-880-91	s RES, CHIP 24K (1608)
R285	1-218-895-91	s RES, CHIP 100K (1608)
R286	1-218-895-91	s RES, CHIP 100K (1608)
R290	1-216-864-91	s CONDUCTOR, CHIP (1608)
R291	1-216-801-91	s RES, CHIP 22 (1608)
R292	1-218-859-91	s RES, CHIP 3.3K (1608)

(BX BOARD (BKM-68X))

Ref. No. or Q'ty	Part No.	SP Description
R293	1-218-895-91	s RES, CHIP 100K (1608)
R294	1-216-816-91	s RES, CHIP 390 (1608)
R295	1-216-809-91	s RES, CHIP 100 (1608)
R297	1-216-809-91	s RES, CHIP 100 (1608)
R298	1-216-825-91	s RES, CHIP 2.2K (1608)
R300	1-216-841-91	s RES, CHIP 47K (1608)
R301	1-216-809-91	s RES, CHIP 100 (1608)
R302	1-216-801-91	s RES, CHIP 22 (1608)
R303	1-216-864-91	s CONDUCTOR, CHIP (1608)
R305	1-216-809-91	s RES, CHIP 100 (1608)
R306	1-216-864-91	s CONDUCTOR, CHIP (1608)
R307	1-216-864-91	s CONDUCTOR, CHIP (1608)
R308	1-216-841-91	s RES, CHIP 47K (1608)
R309	1-216-841-91	s RES, CHIP 47K (1608)
R310	1-216-805-91	s RES, CHIP 47 (1608)
R311	1-216-864-91	s CONDUCTOR, CHIP (1608)
R312	1-216-864-91	s CONDUCTOR, CHIP (1608)
R313	1-216-801-91	s RES, CHIP 22 (1608)
R314	1-216-801-91	s RES, CHIP 22 (1608)
R315	1-216-809-91	s RES, CHIP 100 (1608)
R316	1-216-809-91	s RES, CHIP 100 (1608)
R319	1-216-825-91	s RES, CHIP 2.2K (1608)
R320	1-216-825-91	s RES, CHIP 2.2K (1608)
R321	1-218-853-91	s RES, CHIP 1.8K (1608)
R322	1-218-827-91	s RES, CHIP 150 (1608)
R323	1-218-853-91	s RES, CHIP 1.8K (1608)
R324	1-218-827-91	s RES, CHIP 150 (1608)
R325	1-218-847-91	s RES, CHIP 1.0K (1608)
R326	1-218-847-91	s RES, CHIP 1.0K (1608)
R327	1-218-847-91	s RES, CHIP 1.0K (1608)
R328	1-218-847-91	s RES, CHIP 1.0K (1608)
R329	1-218-827-91	s RES, CHIP 150 (1608)
R330	1-216-809-91	s RES, CHIP 100 (1608)
R331	1-216-809-91	s RES, CHIP 100 (1608)
R332	1-218-827-91	s RES, CHIP 150 (1608)
R333	1-218-855-91	s RES, CHIP 2.2K (1608)
R334	1-218-871-91	s RES, CHIP 10K (1608)
R335	1-216-805-91	s RES, CHIP 47 (1608)
R336	1-218-867-91	s RES, CHIP 6.8K (1608)
R337	1-218-842-91	s RES, CHIP 620 (1608)
R338	1-218-867-91	s RES, CHIP 6.8K (1608)
R339	1-218-846-91	s RES, CHIP 910 (1608)
R340	1-216-809-91	s RES, CHIP 100 (1608)
R341	1-216-809-91	s RES, CHIP 100 (1608)
R342	1-218-849-91	s RES, CHIP 1.2K (1608)
R343	1-218-855-91	s RES, CHIP 2.2K (1608)
R344	1-218-834-91	s RES, CHIP 300 (1608)
R345	1-218-834-91	s RES, CHIP 300 (1608)
R346	1-218-850-91	s RES, CHIP 1.3K (1608)
R347	1-218-850-91	s RES, CHIP 1.3K (1608)
R348	1-216-825-91	s RES, CHIP 2.2K (1608)
R349	1-216-825-91	s RES, CHIP 2.2K (1608)
R350	1-218-838-91	s RES, CHIP 430 (1608)
R351	1-216-809-91	s RES, CHIP 100 (1608)
R352	1-216-809-91	s RES, CHIP 100 (1608)
R353	1-216-825-91	s RES, CHIP 2.2K (1608)
R354	1-216-825-91	s RES, CHIP 2.2K (1608)
R355	1-218-837-91	s RES, CHIP 390 (1608)
R356	1-218-837-91	s RES, CHIP 390 (1608)

(BX BOARD (BKM-68X))

Ref. No. or Q'ty	Part No.	SP Description
R357	1-218-835-91	s RES, CHIP 330 (1608)
R358	1-216-864-91	s CONDUCTOR, CHIP (1608)
R359	1-216-864-91	s CONDUCTOR, CHIP (1608)
R360	1-216-801-91	s RES, CHIP 22 (1608)
R361	1-216-809-91	s RES, CHIP 100 (1608)
R362	1-216-797-91	s RES, CHIP 10 (1608)
R363	1-216-801-91	s RES, CHIP 22 (1608)
R364	1-218-847-91	s RES, CHIP 1.0K (1608)
R365	1-216-805-91	s RES, CHIP 47 (1608)
R367	1-218-863-91	s RES, CHIP 4.7K (1608)
R368	1-216-864-91	s CONDUCTOR, CHIP (1608)
R369	1-216-864-91	s CONDUCTOR, CHIP (1608)
R370	1-218-861-91	s RES, CHIP 3.9K (1608)
R372	1-216-805-91	s RES, CHIP 47 (1608)
R373	1-216-813-91	s RES, CHIP 220 (1608)
R374	1-216-823-91	s RES, CHIP 1.5K (1608)
R375	1-216-805-91	s RES, CHIP 47 (1608)
R377	1-218-859-91	s RES, CHIP 3.3K (1608)
R378	1-218-871-91	s RES, CHIP 10K (1608)
R379	1-216-805-91	s RES, CHIP 47 (1608)
R380	1-218-895-91	s RES, CHIP 100K (1608)
R381	1-218-895-91	s RES, CHIP 100K (1608)
R382	1-216-813-91	s RES, CHIP 220 (1608)
R383	1-218-876-91	s RES, CHIP 16K (1608)
R384	1-218-880-91	s RES, CHIP 24K (1608)
R385	1-218-895-91	s RES, CHIP 100K (1608)
R386	1-218-895-91	s RES, CHIP 100K (1608)
R390	1-216-864-91	s CONDUCTOR, CHIP (1608)
R391	1-216-801-91	s RES, CHIP 22 (1608)
R392	1-218-859-91	s RES, CHIP 3.3K (1608)
R393	1-218-895-91	s RES, CHIP 100K (1608)
R394	1-216-816-91	s RES, CHIP 390 (1608)
R395	1-216-809-91	s RES, CHIP 100 (1608)
R397	1-216-809-91	s RES, CHIP 100 (1608)
R398	1-216-825-91	s RES, CHIP 2.2K (1608)
R400	1-216-797-91	s RES, CHIP 10 (1608)
R401	1-216-805-91	s RES, CHIP 47 (1608)
R402	1-218-889-91	s RES, CHIP 56K (1608)
R403	1-218-883-91	s RES, CHIP 33K (1608)
R404	1-218-891-91	s RES, CHIP 68K (1608)
R405	1-216-809-91	s RES, CHIP 100 (1608)
R406	1-216-809-91	s RES, CHIP 100 (1608)
R407	1-216-809-91	s RES, CHIP 100 (1608)
R409	1-216-864-91	s CONDUCTOR, CHIP (1608)
R410	1-216-805-91	s RES, CHIP 47 (1608)
R411	1-216-864-91	s CONDUCTOR, CHIP (1608)
R412	1-218-839-91	s RES, CHIP 470 (1608)
R413	1-216-825-91	s RES, CHIP 2.2K (1608)
R414	1-216-825-91	s RES, CHIP 2.2K (1608)
R415	1-216-805-91	s RES, CHIP 47 (1608)
R416	1-216-805-91	s RES, CHIP 47 (1608)
R417	1-216-805-91	s RES, CHIP 47 (1608)
R418	1-216-864-91	s CONDUCTOR, CHIP (1608)
R419	1-216-805-91	s RES, CHIP 47 (1608)
R420	1-216-805-91	s RES, CHIP 47 (1608)
R421	1-216-805-91	s RES, CHIP 47 (1608)
R422	1-218-847-91	s RES, CHIP 1.0K (1608)
R423	1-218-847-91	s RES, CHIP 1.0K (1608)
R424	1-216-864-91	s CONDUCTOR, CHIP (1608)

(BX BOARD (BKM-68X))

Ref. No. or Q'ty	Part No.	SP Description
R425	1-216-809-91	s RES, CHIP 100 (1608)
R426	1-216-864-91	s CONDUCTOR, CHIP (1608)
R427	1-218-847-91	s RES, CHIP 1.0K (1608)
R428	1-216-809-91	s RES, CHIP 100 (1608)
R429	1-216-809-91	s RES, CHIP 100 (1608)
R430	1-216-864-91	s CONDUCTOR, CHIP (1608)
R431	1-216-864-91	s CONDUCTOR, CHIP (1608)
R432	1-216-809-91	s RES, CHIP 100 (1608)
R433	1-216-809-91	s RES, CHIP 100 (1608)
R434	1-216-801-91	s RES, CHIP 22 (1608)
R435	1-218-847-91	s RES, CHIP 1.0K (1608)
R436	1-218-847-91	s RES, CHIP 1.0K (1608)
R437	1-216-801-91	s RES, CHIP 22 (1608)
R438	1-216-825-91	s RES, CHIP 2.2K (1608)
R439	1-216-825-91	s RES, CHIP 2.2K (1608)
R442	1-218-853-91	s RES, CHIP 1.8K (1608)
R443	1-218-827-91	s RES, CHIP 150 (1608)
R444	1-218-853-91	s RES, CHIP 1.8K (1608)
R445	1-218-827-91	s RES, CHIP 150 (1608)
R446	1-216-805-91	s RES, CHIP 47 (1608)
R447	1-216-809-91	s RES, CHIP 100 (1608)
R448	1-218-834-91	s RES, CHIP 300 (1608)
R449	1-216-822-91	s RES, CHIP 1.2K (1608)
R450	1-218-837-91	s RES, CHIP 390 (1608)
R451	1-216-826-91	s RES, CHIP 2.7K (1608)
R452	1-218-839-91	s RES, CHIP 470 (1608)
R453	1-218-827-91	s RES, CHIP 150 (1608)
R454	1-218-827-91	s RES, CHIP 150 (1608)
R455	1-218-835-91	s RES, CHIP 330 (1608)
R456	1-218-847-91	s RES, CHIP 1.0K (1608)
R457	1-216-809-91	s RES, CHIP 100 (1608)
R458	1-216-809-91	s RES, CHIP 100 (1608)
R459	1-216-825-91	s RES, CHIP 2.2K (1608)
R460	1-216-805-91	s RES, CHIP 47 (1608)
R461	1-218-834-91	s RES, CHIP 300 (1608)
R462	1-218-834-91	s RES, CHIP 300 (1608)
R463	1-216-827-91	s RES, CHIP 3.3K (1608)
R464	1-216-809-91	s RES, CHIP 100 (1608)
R465	1-218-855-91	s RES, CHIP 2.2K (1608)
R466	1-216-823-91	s RES, CHIP 1.5K (1608)
R467	1-218-867-91	s RES, CHIP 6.8K (1608)
R468	1-218-843-91	s RES, CHIP 680 (1608)
R469	1-218-847-91	s RES, CHIP 1.0K (1608)
R470	1-218-849-91	s RES, CHIP 1.2K (1608)
R471	1-216-809-91	s RES, CHIP 100 (1608)
R472	1-218-839-91	s RES, CHIP 470 (1608)
R473	1-218-850-91	s RES, CHIP 1.3K (1608)
R474	1-216-809-91	s RES, CHIP 100 (1608)
R475	1-216-825-91	s RES, CHIP 2.2K (1608)
R476	1-216-809-91	s RES, CHIP 100 (1608)
R477	1-216-826-91	s RES, CHIP 2.7K (1608)
R478	1-218-849-91	s RES, CHIP 1.2K (1608)
R479	1-216-825-91	s RES, CHIP 2.2K (1608)
R480	1-216-805-91	s RES, CHIP 47 (1608)
R481	1-216-826-91	s RES, CHIP 2.7K (1608)
R482	1-216-822-91	s RES, CHIP 1.2K (1608)
R483	1-216-841-91	s RES, CHIP 47K (1608)
R484	1-216-805-91	s RES, CHIP 47 (1608)
R485	1-218-895-91	s RES, CHIP 100K (1608)

(BX BOARD (BKM-68X))

Ref. No. or Q'ty	Part No.	SP Description
R486	1-218-871-91	s RES, CHIP 10K (1608)
R487	1-218-851-91	s RES, CHIP 1.5K (1608)
R488	1-218-883-91	s RES, CHIP 33K (1608)
R489	1-218-889-91	s RES, CHIP 56K (1608)
R490	1-216-801-91	s RES, CHIP 22 (1608)
R491	1-216-809-91	s RES, CHIP 100 (1608)
R492	1-216-797-91	s RES, CHIP 10 (1608)
R493	1-216-801-91	s RES, CHIP 22 (1608)
R494	1-216-802-91	s RES, CHIP 27 (1608)
R495	1-218-847-91	s RES, CHIP 1.0K (1608)
R496	1-216-823-91	s RES, CHIP 1.5K (1608)
R498	1-218-863-91	s RES, CHIP 4.7K (1608)
R499	1-216-864-91	s CONDUCTOR, CHIP (1608)
R500	1-216-864-91	s CONDUCTOR, CHIP (1608)
R501	1-218-861-91	s RES, CHIP 3.9K (1608)
R503	1-216-805-91	s RES, CHIP 47 (1608)
R504	1-216-813-91	s RES, CHIP 220 (1608)
R505	1-216-823-91	s RES, CHIP 1.5K (1608)
R506	1-216-805-91	s RES, CHIP 47 (1608)
R507	1-218-859-91	s RES, CHIP 3.3K (1608)
R508	1-216-823-91	s RES, CHIP 1.5K (1608)
R509	1-218-871-91	s RES, CHIP 10K (1608)
R510	1-216-805-91	s RES, CHIP 47 (1608)
R511	1-218-895-91	s RES, CHIP 100K (1608)
R512	1-218-895-91	s RES, CHIP 100K (1608)
R513	1-216-813-91	s RES, CHIP 220 (1608)
R514	1-218-876-91	s RES, CHIP 16K (1608)
R515	1-218-880-91	s RES, CHIP 24K (1608)
R516	1-218-895-91	s RES, CHIP 100K (1608)
R517	1-218-895-91	s RES, CHIP 100K (1608)
R519	1-216-801-91	s RES, CHIP 22 (1608)
R520	1-216-801-91	s RES, CHIP 22 (1608)
R521	1-216-801-91	s RES, CHIP 22 (1608)
R522	1-216-797-91	s RES, CHIP 10 (1608)
R523	1-218-827-91	s RES, CHIP 150 (1608)
R524	1-218-827-91	s RES, CHIP 150 (1608)
R525	1-218-827-91	s RES, CHIP 150 (1608)
R526	1-218-827-91	s RES, CHIP 150 (1608)
R527	1-218-827-91	s RES, CHIP 150 (1608)
R528	1-218-827-91	s RES, CHIP 150 (1608)
R529	1-216-864-91	s CONDUCTOR, CHIP (1608)
R530	1-216-809-91	s RES, CHIP 100 (1608)
R531	1-216-813-91	s RES, CHIP 220 (1608)
R533	1-216-816-91	s RES, CHIP 390 (1608)
R534	1-216-809-91	s RES, CHIP 100 (1608)
R536	1-216-809-91	s RES, CHIP 100 (1608)
R537	1-218-855-91	s RES, CHIP 2.2K (1608)
R538	1-216-809-91	s RES, CHIP 100 (1608)
R539	1-216-825-91	s RES, CHIP 2.2K (1608)
R550	1-216-841-91	s RES, CHIP 47K (1608)
R551	1-216-841-91	s RES, CHIP 47K (1608)
R552	1-216-805-91	s RES, CHIP 47 (1608)
R553	1-216-809-91	s RES, CHIP 100 (1608)
R554	1-216-805-91	s RES, CHIP 47 (1608)
R555	1-216-823-91	s RES, CHIP 1.5K (1608)
R556	1-216-809-91	s RES, CHIP 100 (1608)
R557	1-216-827-91	s RES, CHIP 3.3K (1608)
R558	1-218-859-91	s RES, CHIP 3.3K (1608)
R559	1-218-895-91	s RES, CHIP 100K (1608)

(BX BOARD (BKM-68X))

Ref. No. or Q'ty	Part No.	SP Description
R600	1-216-825-91	s RES, CHIP 2.2K (1608)
R601	1-216-833-91	s RES, CHIP 10K (1608)
R603	1-218-871-91	s RES, CHIP 10K (1608)
R604	1-218-871-91	s RES, CHIP 10K (1608)
R605	1-218-871-91	s RES, CHIP 10K (1608)
R606	1-216-825-91	s RES, CHIP 2.2K (1608)
R607	1-216-821-91	s RES, CHIP 1.0K (1608)
R608	1-218-839-91	s RES, CHIP 470 (1608)
R609	1-218-861-91	s RES, CHIP 3.9K (1608)
R610	1-218-851-91	s RES, CHIP 1.5K (1608)
R611	1-211-990-91	s RES, CHIP 75 (1608)
R612	1-218-851-91	s RES, CHIP 1.5K (1608)
R613	1-218-835-91	s RES, CHIP 330 (1608)
R614	1-216-809-91	s RES, CHIP 100 (1608)
R615	1-216-809-91	s RES, CHIP 100 (1608)
R616	1-216-809-91	s RES, CHIP 100 (1608)
R617	1-216-809-91	s RES, CHIP 100 (1608)
R618	1-216-809-91	s RES, CHIP 100 (1608)
R619	1-216-809-91	s RES, CHIP 100 (1608)
R620	1-216-864-91	s CONDUCTOR, CHIP (1608)
R621	1-216-813-91	s RES, CHIP 220 (1608)
R622	1-216-813-91	s RES, CHIP 220 (1608)
R623	1-216-813-91	s RES, CHIP 220 (1608)
R624	1-218-873-91	s RES, CHIP 12K (1608)
R625	1-218-850-91	s RES, CHIP 1.3K (1608)
R626	1-218-867-91	s RES, CHIP 6.8K (1608)
R627	1-218-855-91	s RES, CHIP 2.2K (1608)
R628	1-218-837-91	s RES, CHIP 390 (1608)
R630	1-211-987-91	s RES, CHIP 56 (1608)
R631	1-218-829-91	s RES, CHIP 180 (1608)
R632	1-218-839-91	s RES, CHIP 470 (1608)
R633	1-216-864-91	s CONDUCTOR, CHIP (1608)
R634	1-218-845-91	s RES, CHIP 820 (1608)
R635	1-218-839-91	s RES, CHIP 470 (1608)
R636	1-216-809-91	s RES, CHIP 100 (1608)
R637	1-218-837-91	s RES, CHIP 390 (1608)
R638	1-218-861-91	s RES, CHIP 3.9K (1608)
R639	1-218-868-91	s RES, CHIP 7.5K (1608)
R640	1-216-825-91	s RES, CHIP 2.2K (1608)
R641	1-218-837-91	s RES, CHIP 390 (1608)
R643	1-216-809-91	s RES, CHIP 100 (1608)
R644	1-216-807-91	s RES, CHIP 68 (1608)
R645	1-216-809-91	s RES, CHIP 100 (1608)
R646	1-216-805-91	s RES, CHIP 47 (1608)
R647	1-216-821-91	s RES, CHIP 1.0K (1608)
R648	1-216-809-91	s RES, CHIP 100 (1608)
R649	1-216-864-91	s CONDUCTOR, CHIP (1608)
R650	1-216-841-91	s RES, CHIP 47K (1608)
R651	1-216-841-91	s RES, CHIP 47K (1608)
R652	1-216-841-91	s RES, CHIP 47K (1608)
R653	1-218-823-91	s RES, CHIP 100 (1608)
R660	1-216-809-91	s RES, CHIP 100 (1608)
R661	1-216-809-91	s RES, CHIP 100 (1608)
R662	1-216-809-91	s RES, CHIP 100 (1608)
R663	1-216-809-91	s RES, CHIP 100 (1608)
R664	1-216-809-91	s RES, CHIP 100 (1608)
R680	1-216-825-91	s RES, CHIP 2.2K (1608)
R681	1-216-825-91	s RES, CHIP 2.2K (1608)
R682	1-216-825-91	s RES, CHIP 2.2K (1608)

(BX BOARD (BKM-68X))

Ref. No. or Q'ty	Part No.	SP Description
R683	1-216-826-91	s RES, CHIP 2.7K (1608)
R684	1-216-826-91	s RES, CHIP 2.7K (1608)
R685	1-216-826-91	s RES, CHIP 2.7K (1608)
R700	1-216-836-91	s RES, CHIP 18K (1608)
R701	1-216-842-91	s RES, CHIP 56K (1608)
R703	1-216-864-91	s CONDUCTOR, CHIP (1608)
R705	1-216-825-91	s RES, CHIP 2.2K (1608)
R706	1-216-821-91	s RES, CHIP 1.0K (1608)
R707	1-216-809-91	s RES, CHIP 100 (1608)
R708	1-216-828-91	s RES, CHIP 3.9K (1608)
R709	1-216-823-91	s RES, CHIP 1.5K (1608)
R710	1-218-863-91	s RES, CHIP 4.7K (1608)
R711	1-218-863-91	s RES, CHIP 4.7K (1608)
R712	1-216-809-91	s RES, CHIP 100 (1608)
R713	1-216-809-91	s RES, CHIP 100 (1608)
R714	1-216-829-91	s RES, CHIP 4.7K (1608)
R715	1-216-825-91	s RES, CHIP 2.2K (1608)
R716	1-216-825-91	s RES, CHIP 2.2K (1608)
R717	1-216-801-91	s RES, CHIP 22 (1608)
R718	1-216-809-91	s RES, CHIP 100 (1608)
R719	1-218-883-91	s RES, CHIP 33K (1608)
R720	1-218-875-91	s RES, CHIP 15K (1608)
R721	1-216-845-91	s RES, CHIP 100K (1608)
R722	1-216-801-91	s RES, CHIP 22 (1608)
R723	1-216-809-91	s RES, CHIP 100 (1608)
R724	1-218-859-91	s RES, CHIP 3.3K (1608)
R725	1-218-855-91	s RES, CHIP 2.2K (1608)
R726	1-216-801-91	s RES, CHIP 22 (1608)
R727	1-216-809-91	s RES, CHIP 100 (1608)
R728	1-216-809-91	s RES, CHIP 100 (1608)
R729	1-218-847-91	s RES, CHIP 1.0K (1608)
R730	1-218-851-91	s RES, CHIP 1.5K (1608)
R731	1-216-825-91	s RES, CHIP 2.2K (1608)
R732	1-218-879-91	s RES, CHIP 22K (1608)
R733	1-216-821-91	s RES, CHIP 1.0K (1608)
R734	1-216-821-91	s RES, CHIP 1.0K (1608)
R735	1-216-825-91	s RES, CHIP 2.2K (1608)
R736	1-216-815-91	s RES, CHIP 330 (1608)
R737	1-216-830-91	s RES, CHIP 5.6K (1608)
R738	1-216-830-91	s RES, CHIP 5.6K (1608)
R739	1-216-830-91	s RES, CHIP 5.6K (1608)
R740	1-216-830-91	s RES, CHIP 5.6K (1608)
R741	1-216-817-91	s RES, CHIP 470 (1608)
R742	1-216-844-91	s RES, CHIP 82K (1608)
R743	1-216-844-91	s RES, CHIP 82K (1608)
R744	1-216-829-91	s RES, CHIP 4.7K (1608)
R745	1-216-829-91	s RES, CHIP 4.7K (1608)
R746	1-216-809-91	s RES, CHIP 100 (1608)
R747	1-216-809-91	s RES, CHIP 100 (1608)
R748	1-216-811-91	s RES, CHIP 150 (1608)
R749	1-218-855-91	s RES, CHIP 2.2K (1608)
R750	1-218-855-91	s RES, CHIP 2.2K (1608)
R751	1-218-889-91	s RES, CHIP 56K (1608)
R752	1-218-898-91	s RES, CHIP 130K (1608)
R753	1-218-911-91	s RES, CHIP 470K (1608)
R754	1-216-829-91	s RES, CHIP 4.7K (1608)
R755	1-216-829-91	s RES, CHIP 4.7K (1608)
R756	1-216-831-91	s RES, CHIP 6.8K (1608)
R757	1-216-805-91	s RES, CHIP 47 (1608)

(BX BOARD (BKM-68X))

Ref. No. or Q'ty	Part No.	SP Description
R758	1-216-805-91	s RES, CHIP 47 (1608)
R759	1-218-855-91	s RES, CHIP 2.2K (1608)
R760	1-218-833-91	s RES, CHIP 270 (1608)
R761	1-218-833-91	s RES, CHIP 270 (1608)
R762	1-218-857-91	s RES, CHIP 2.7K (1608)
R763	1-218-857-91	s RES, CHIP 2.7K (1608)
R764	1-218-877-91	s RES, CHIP 18K (1608)
R765	1-218-872-91	s RES, CHIP 11K (1608)
R766	1-216-825-91	s RES, CHIP 2.2K (1608)
R767	1-216-845-91	s RES, CHIP 100K (1608)
R768	1-218-865-91	s RES, CHIP 5.6K (1608)
R769	1-216-815-91	s RES, CHIP 330 (1608)
R770	1-216-833-91	s RES, CHIP 10K (1608)
R771	1-218-893-91	s RES, CHIP 82K (1608)
R772	1-216-826-91	s RES, CHIP 2.7K (1608)
R773	1-218-879-91	s RES, CHIP 22K (1608)
R774	1-218-892-91	s RES, CHIP 75K (1608)
R775	1-218-883-91	s RES, CHIP 33K (1608)
R776	1-218-855-91	s RES, CHIP 2.2K (1608)
R777	1-218-855-91	s RES, CHIP 2.2K (1608)
R778	1-218-855-91	s RES, CHIP 2.2K (1608)
R779	1-216-825-91	s RES, CHIP 2.2K (1608)
R780	1-216-809-91	s RES, CHIP 100 (1608)
R781	1-216-845-91	s RES, CHIP 100K (1608)
R782	1-216-829-91	s RES, CHIP 4.7K (1608)
R783	1-216-821-91	s RES, CHIP 1.0K (1608)
R784	1-216-809-91	s RES, CHIP 100 (1608)
R785	1-216-821-91	s RES, CHIP 1.0K (1608)
R786	1-218-903-91	s RES, CHIP 220K (1608)
R787	1-216-809-91	s RES, CHIP 100 (1608)
R788	1-216-805-91	s RES, CHIP 47 (1608)
R789	1-216-841-91	s RES, CHIP 47K (1608)
R790	1-216-813-91	s RES, CHIP 220 (1608)
R791	1-216-825-91	s RES, CHIP 2.2K (1608)
R800	1-218-919-91	s RES, CHIP 1M (1608)
R801	1-216-864-91	s CONDUCTOR, CHIP (1608)
R803	1-218-859-91	s RES, CHIP 3.3K (1608)
R804	1-218-869-91	s RES, CHIP 8.2K (1608)
R805	1-218-863-91	s RES, CHIP 4.7K (1608)
R806	1-218-859-91	s RES, CHIP 3.3K (1608)
R807	1-216-864-91	s CONDUCTOR, CHIP (1608)
R808	1-216-864-91	s CONDUCTOR, CHIP (1608)
R809	1-216-864-91	s CONDUCTOR, CHIP (1608)
R810	1-216-864-91	s CONDUCTOR, CHIP (1608)
R811	1-216-864-91	s CONDUCTOR, CHIP (1608)
R812	1-218-863-91	s RES, CHIP 4.7K (1608)
R813	1-216-864-91	s CONDUCTOR, CHIP (1608)
R814	1-216-864-91	s CONDUCTOR, CHIP (1608)
R816	1-216-864-91	s CONDUCTOR, CHIP (1608)
R817	1-216-797-91	s RES, CHIP 10 (1608)
R818	1-216-829-91	s RES, CHIP 4.7K (1608)
R819	1-216-817-91	s RES, CHIP 470 (1608)
R820	1-216-817-91	s RES, CHIP 470 (1608)
R821	1-216-829-91	s RES, CHIP 4.7K (1608)
R822	1-216-864-91	s CONDUCTOR, CHIP (1608)
R823	1-216-815-91	s RES, CHIP 330 (1608)
R824	1-216-829-91	s RES, CHIP 4.7K (1608)
R825	1-216-829-91	s RES, CHIP 4.7K (1608)
R827	1-216-864-91	s CONDUCTOR, CHIP (1608)

(BX BOARD (BKM-68X))

Ref. No. or Q'ty	Part No.	SP Description
R828	1-216-864-91	s CONDUCTOR, CHIP (1608)
R829	1-216-864-91	s CONDUCTOR, CHIP (1608)
R831	1-216-864-91	s CONDUCTOR, CHIP (1608)
R832	1-216-845-91	s RES, CHIP 100K (1608)
R833	1-216-837-91	s RES, CHIP 22K (1608)
R834	1-216-801-91	s RES, CHIP 22 (1608)
R835	1-216-801-91	s RES, CHIP 22 (1608)
R836	1-216-801-91	s RES, CHIP 22 (1608)
R837	1-216-801-91	s RES, CHIP 22 (1608)
R838	1-216-801-91	s RES, CHIP 22 (1608)
R839	1-216-809-91	s RES, CHIP 100 (1608)
R840	1-216-801-91	s RES, CHIP 22 (1608)
R841	1-216-809-91	s RES, CHIP 100 (1608)
R842	1-216-801-91	s RES, CHIP 22 (1608)
R843	1-218-859-91	s RES, CHIP 3.3K (1608)
R844	1-216-801-91	s RES, CHIP 22 (1608)
R846	1-216-801-91	s RES, CHIP 22 (1608)
R847	1-216-801-91	s RES, CHIP 22 (1608)
R848	1-216-809-91	s RES, CHIP 100 (1608)
R849	1-216-864-91	s CONDUCTOR, CHIP (1608)
R850	1-216-864-91	s CONDUCTOR, CHIP (1608)
R853	1-216-829-91	s RES, CHIP 4.7K (1608)
R854	1-218-859-91	s RES, CHIP 3.3K (1608)
R855	1-216-829-91	s RES, CHIP 4.7K (1608)
R856	1-216-864-91	s CONDUCTOR, CHIP (1608)
R857	1-216-801-91	s RES, CHIP 22 (1608)
R858	1-216-801-91	s RES, CHIP 22 (1608)
R859	1-218-859-91	s RES, CHIP 3.3K (1608)
R860	1-216-801-91	s RES, CHIP 22 (1608)
R861	1-216-801-91	s RES, CHIP 22 (1608)
R862	1-216-801-91	s RES, CHIP 22 (1608)
R863	1-216-801-91	s RES, CHIP 22 (1608)
R864	1-216-801-91	s RES, CHIP 22 (1608)
R865	1-216-801-91	s RES, CHIP 22 (1608)
R866	1-216-801-91	s RES, CHIP 22 (1608)
R867	1-218-859-91	s RES, CHIP 3.3K (1608)
R868	1-216-801-91	s RES, CHIP 22 (1608)
R869	1-218-859-91	s RES, CHIP 3.3K (1608)
R870	1-216-801-91	s RES, CHIP 22 (1608)
R871	1-216-801-91	s RES, CHIP 22 (1608)
R872	1-218-859-91	s RES, CHIP 3.3K (1608)
R873	1-218-859-91	s RES, CHIP 3.3K (1608)
R874	1-216-797-91	s RES, CHIP 10 (1608)
R875	1-216-864-91	s CONDUCTOR, CHIP (1608)
R876	1-216-864-91	s CONDUCTOR, CHIP (1608)
R877	1-216-864-91	s CONDUCTOR, CHIP (1608)
R878	1-216-864-91	s CONDUCTOR, CHIP (1608)
R879	1-216-808-91	s RES, CHIP 82 (1608)
R882	1-216-864-91	s CONDUCTOR, CHIP (1608)
R883	1-216-815-91	s RES, CHIP 330 (1608)
R884	1-216-815-91	s RES, CHIP 330 (1608)
R885	1-216-801-91	s RES, CHIP 22 (1608)
R886	1-216-833-91	s RES, CHIP 10K (1608)
R887	1-216-829-91	s RES, CHIP 4.7K (1608)
R888	1-216-833-91	s RES, CHIP 10K (1608)
R889	1-216-829-91	s RES, CHIP 4.7K (1608)
R890	1-216-833-91	s RES, CHIP 10K (1608)
R892	1-216-841-91	s RES, CHIP 47K (1608)
R893	1-216-801-91	s RES, CHIP 22 (1608)

(BX BOARD (BKM-68X))

Ref. No. or Q'ty	Part No.	SP Description
R900	1-216-829-91	s RES, CHIP 4.7K (1608)
R904	1-216-864-91	s CONDUCTOR, CHIP (1608)
R908	1-216-864-91	s CONDUCTOR, CHIP (1608)
R910	1-216-801-91	s RES, CHIP 22 (1608)
R911	1-216-801-91	s RES, CHIP 22 (1608)
R912	1-216-801-91	s RES, CHIP 22 (1608)
R913	1-216-797-91	s RES, CHIP 10 (1608)
R914	1-216-801-91	s RES, CHIP 22 (1608)
R915	1-216-801-91	s RES, CHIP 22 (1608)
R916	1-216-801-91	s RES, CHIP 22 (1608)
R917	1-216-807-91	s RES, CHIP 68 (1608)
R918	1-216-807-91	s RES, CHIP 68 (1608)
R919	1-216-807-91	s RES, CHIP 68 (1608)
R920	1-216-807-91	s RES, CHIP 68 (1608)
R921	1-216-807-91	s RES, CHIP 68 (1608)
R922	1-216-807-91	s RES, CHIP 68 (1608)
R923	1-216-807-91	s RES, CHIP 68 (1608)
R924	1-216-807-91	s RES, CHIP 68 (1608)
R925	1-216-801-91	s RES, CHIP 22 (1608)
R926	1-216-801-91	s RES, CHIP 22 (1608)
R927	1-216-807-91	s RES, CHIP 68 (1608)
R928	1-216-807-91	s RES, CHIP 68 (1608)
R929	1-216-801-91	s RES, CHIP 22 (1608)
R930	1-216-807-91	s RES, CHIP 68 (1608)
R931	1-216-801-91	s RES, CHIP 22 (1608)
R932	1-216-837-91	s RES, CHIP 22K (1608)
R933	1-216-829-91	s RES, CHIP 4.7K (1608)
R935	1-216-825-91	s RES, CHIP 2.2K (1608)
R936	1-216-809-91	s RES, CHIP 100 (1608)
R937	1-216-864-91	s CONDUCTOR, CHIP (1608)
R938	1-216-805-91	s RES, CHIP 47 (1608)
R939	1-216-805-91	s RES, CHIP 47 (1608)
R940	1-216-805-91	s RES, CHIP 47 (1608)
R941	1-216-837-91	s RES, CHIP 22K (1608)
R942	1-216-837-91	s RES, CHIP 22K (1608)
R943	1-216-837-91	s RES, CHIP 22K (1608)
R944	1-216-833-91	s RES, CHIP 10K (1608)
R945	1-216-833-91	s RES, CHIP 10K (1608)
R950	1-218-823-91	s RES, CHIP 100 (1608)
R951	1-211-985-91	s RES, CHIP 47 (1608)
R952	1-211-985-91	s RES, CHIP 47 (1608)
R985	1-216-864-91	s CONDUCTOR, CHIP (1608)
R986	1-216-864-91	s CONDUCTOR, CHIP (1608)
R987	1-216-864-91	s CONDUCTOR, CHIP (1608)
R988	1-216-805-91	s RES, CHIP 47 (1608)
R989	1-216-805-91	s RES, CHIP 47 (1608)
R990	1-216-809-91	s RES, CHIP 100 (1608)
R991	1-216-809-91	s RES, CHIP 100 (1608)
R992	1-216-809-91	s RES, CHIP 100 (1608)
RB800	1-233-578-21	s RES, CHIP NETWORK 47K (3216)
RB801	1-233-578-21	s RES, CHIP NETWORK 47K (3216)
RB802	1-234-523-21	s RES, CHIP NETWORK 0 (3216)
RB803	1-234-523-21	s RES, CHIP NETWORK 0 (3216)
RB900	1-233-414-21	s RES, CHIP NETWORK 4.7K (3216)
RB901	1-233-414-21	s RES, CHIP NETWORK 4.7K (3216)
RB902	1-233-416-21	s RES, CHIP NETWORK 22K (3216)
RB903	1-233-415-21	s RES, CHIP NETWORK 10K (3216)
RB904	1-233-416-21	s RES, CHIP NETWORK 22K (3216)
RB905	1-233-416-21	s RES, CHIP NETWORK 22K (3216)


(BX BOARD (BKM-68X))

Ref. No. or Q'ty	Part No.	SP Description
RB906	1-233-880-21	s RES, NETWORK 68 (3216)
RB907	1-233-880-21	s RES, NETWORK 68 (3216)
RB908	1-233-880-21	s RES, NETWORK 68 (3216)
RB909	1-233-575-21	s RES, CHIP NETWORK 22 (3216)
RB910	1-233-575-21	s RES, CHIP NETWORK 22 (3216)
RB911	1-233-880-21	s RES, NETWORK 68 (3216)
RB912	1-233-880-21	s RES, NETWORK 68 (3216)
RB913	1-233-423-21	s RES, CHIP NETWORK 47 (3216)
RB914	1-233-423-21	s RES, CHIP NETWORK 47 (3216)
RB915	1-233-880-21	s RES, NETWORK 68 (3216)
RB916	1-233-578-21	s RES, CHIP NETWORK 47K (3216)
RB917	1-233-578-21	s RES, CHIP NETWORK 47K (3216)
RB918	1-233-578-21	s RES, CHIP NETWORK 47K (3216)
S801	1-771-709-21	s SWITCH, SLIDE
TP210	1-535-877-22	s CHIP, CHECKER
TP211	1-535-877-22	s CHIP, CHECKER
TP310	1-535-877-22	s CHIP, CHECKER
TP311	1-535-877-22	s CHIP, CHECKER
TP400	1-535-877-22	s CHIP, CHECKER
TP401	1-535-877-22	s CHIP, CHECKER
TP402	1-535-877-22	s CHIP, CHECKER
TP480	1-535-877-22	s CHIP, CHECKER
TP481	1-535-877-22	s CHIP, CHECKER
TP482	1-535-877-22	s CHIP, CHECKER
TP483	1-535-877-22	s CHIP, CHECKER
TP484	1-535-877-22	s CHIP, CHECKER
TP485	1-535-877-22	s CHIP, CHECKER
TP601	1-535-877-22	s CHIP, CHECKER
TP602	1-535-877-22	s CHIP, CHECKER
TP603	1-535-877-22	s CHIP, CHECKER
TP700	1-535-877-22	s CHIP, CHECKER
TP701	1-535-877-22	s CHIP, CHECKER
TP702	1-535-877-22	s CHIP, CHECKER
TP703	1-535-877-22	s CHIP, CHECKER
TP704	1-535-877-22	s CHIP, CHECKER
TP705	1-535-877-22	s CHIP, CHECKER
TP706	1-535-877-22	s CHIP, CHECKER
TP800	1-535-877-22	s CHIP, CHECKER
TP901	1-535-877-22	s CHIP, CHECKER
TP902	1-535-877-22	s CHIP, CHECKER
TP903	1-535-877-22	s CHIP, CHECKER
X800	1-795-984-11	s OSCILLATOR, CRYSTAL
X900	1-795-984-11	s OSCILLATOR, CRYSTAL


SUPPLIED ACCESSORIES

Ref. No. or Q'ty	Part No.	SP Description
1pc	2-593-880-01	s OPERATION MANUAL (JAPANESE, ENGLISH)
1pc	3-703-263-13	o BAG, CONDUCTIVE

Section 5
Block Diagrams

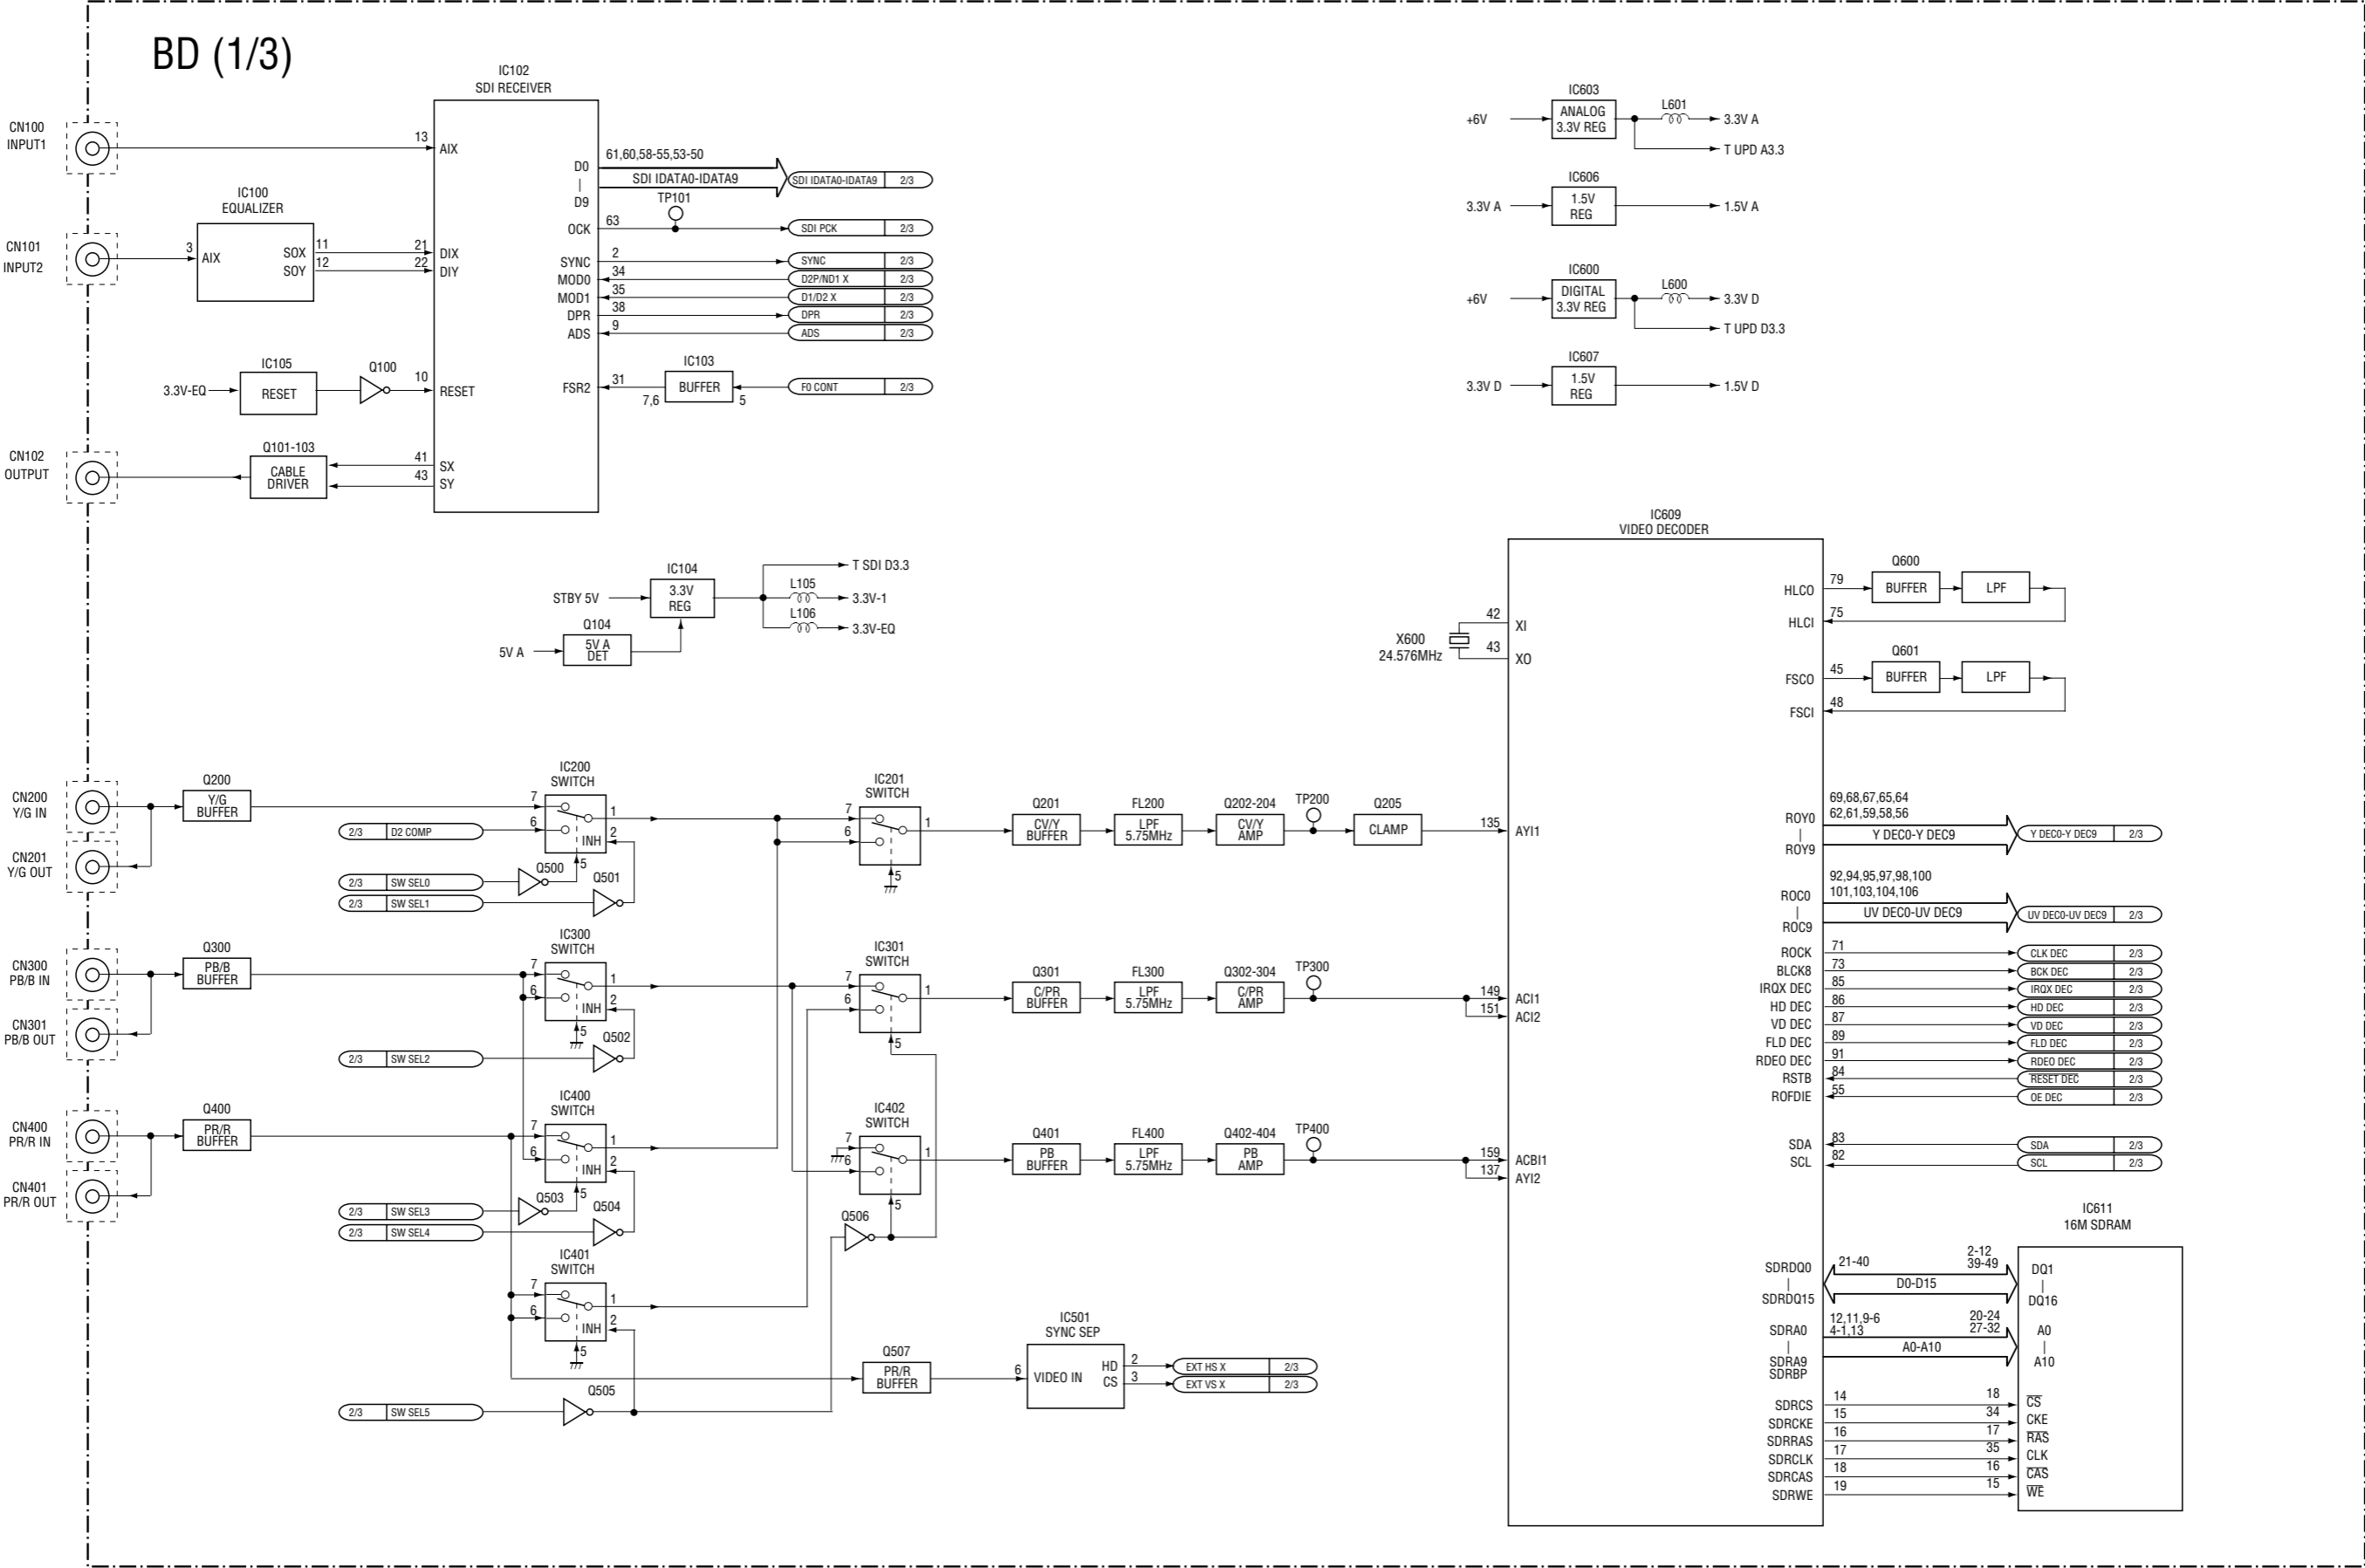

BD (2/3)

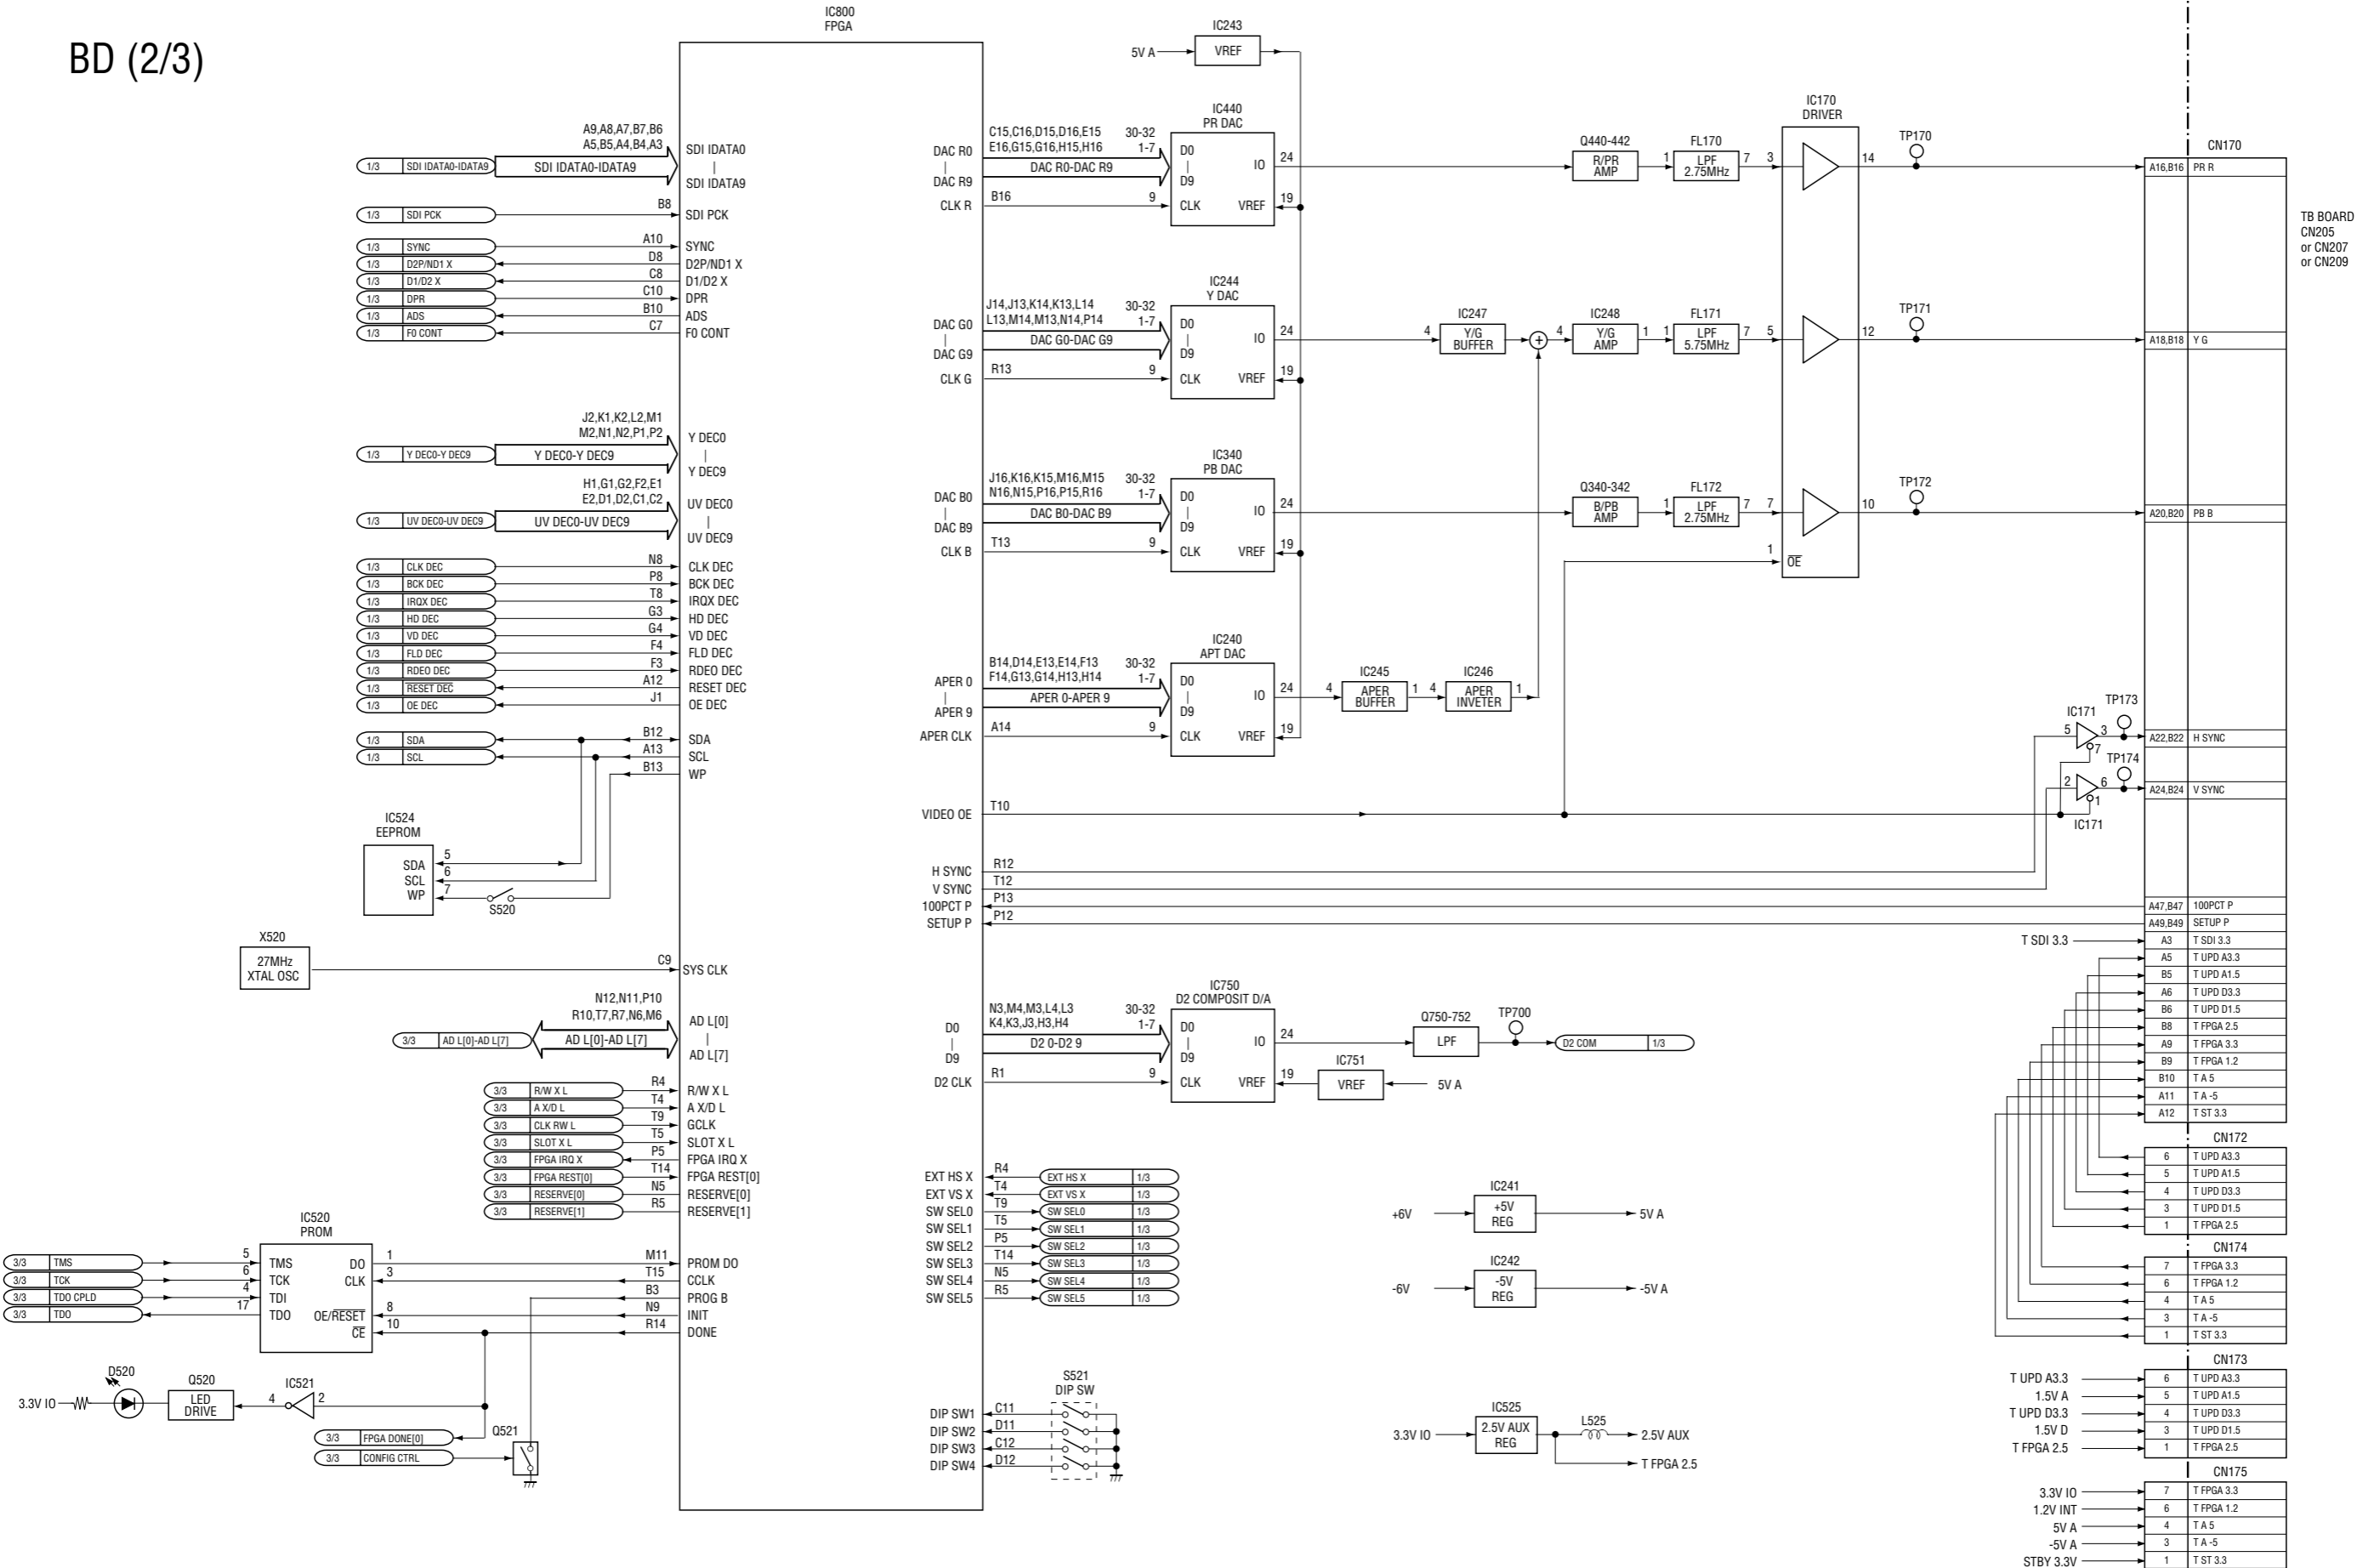



BHS (1/2) (BKM-62HS)







Section 6
Schematic Diagrams

Board Name	Function	Page
BD	SDI/ANALOG MULTI INPUT ADAPTOR	6-2
BHS	HD SDI/SDI INPUT ADAPTOR	6-10
BX	ANALOG COMPONENT INPUT ADAPTOR	6-19

BD (1/8)(BKM-61D) BD (1/8)(BKM-61D)


1

2


3

4

5

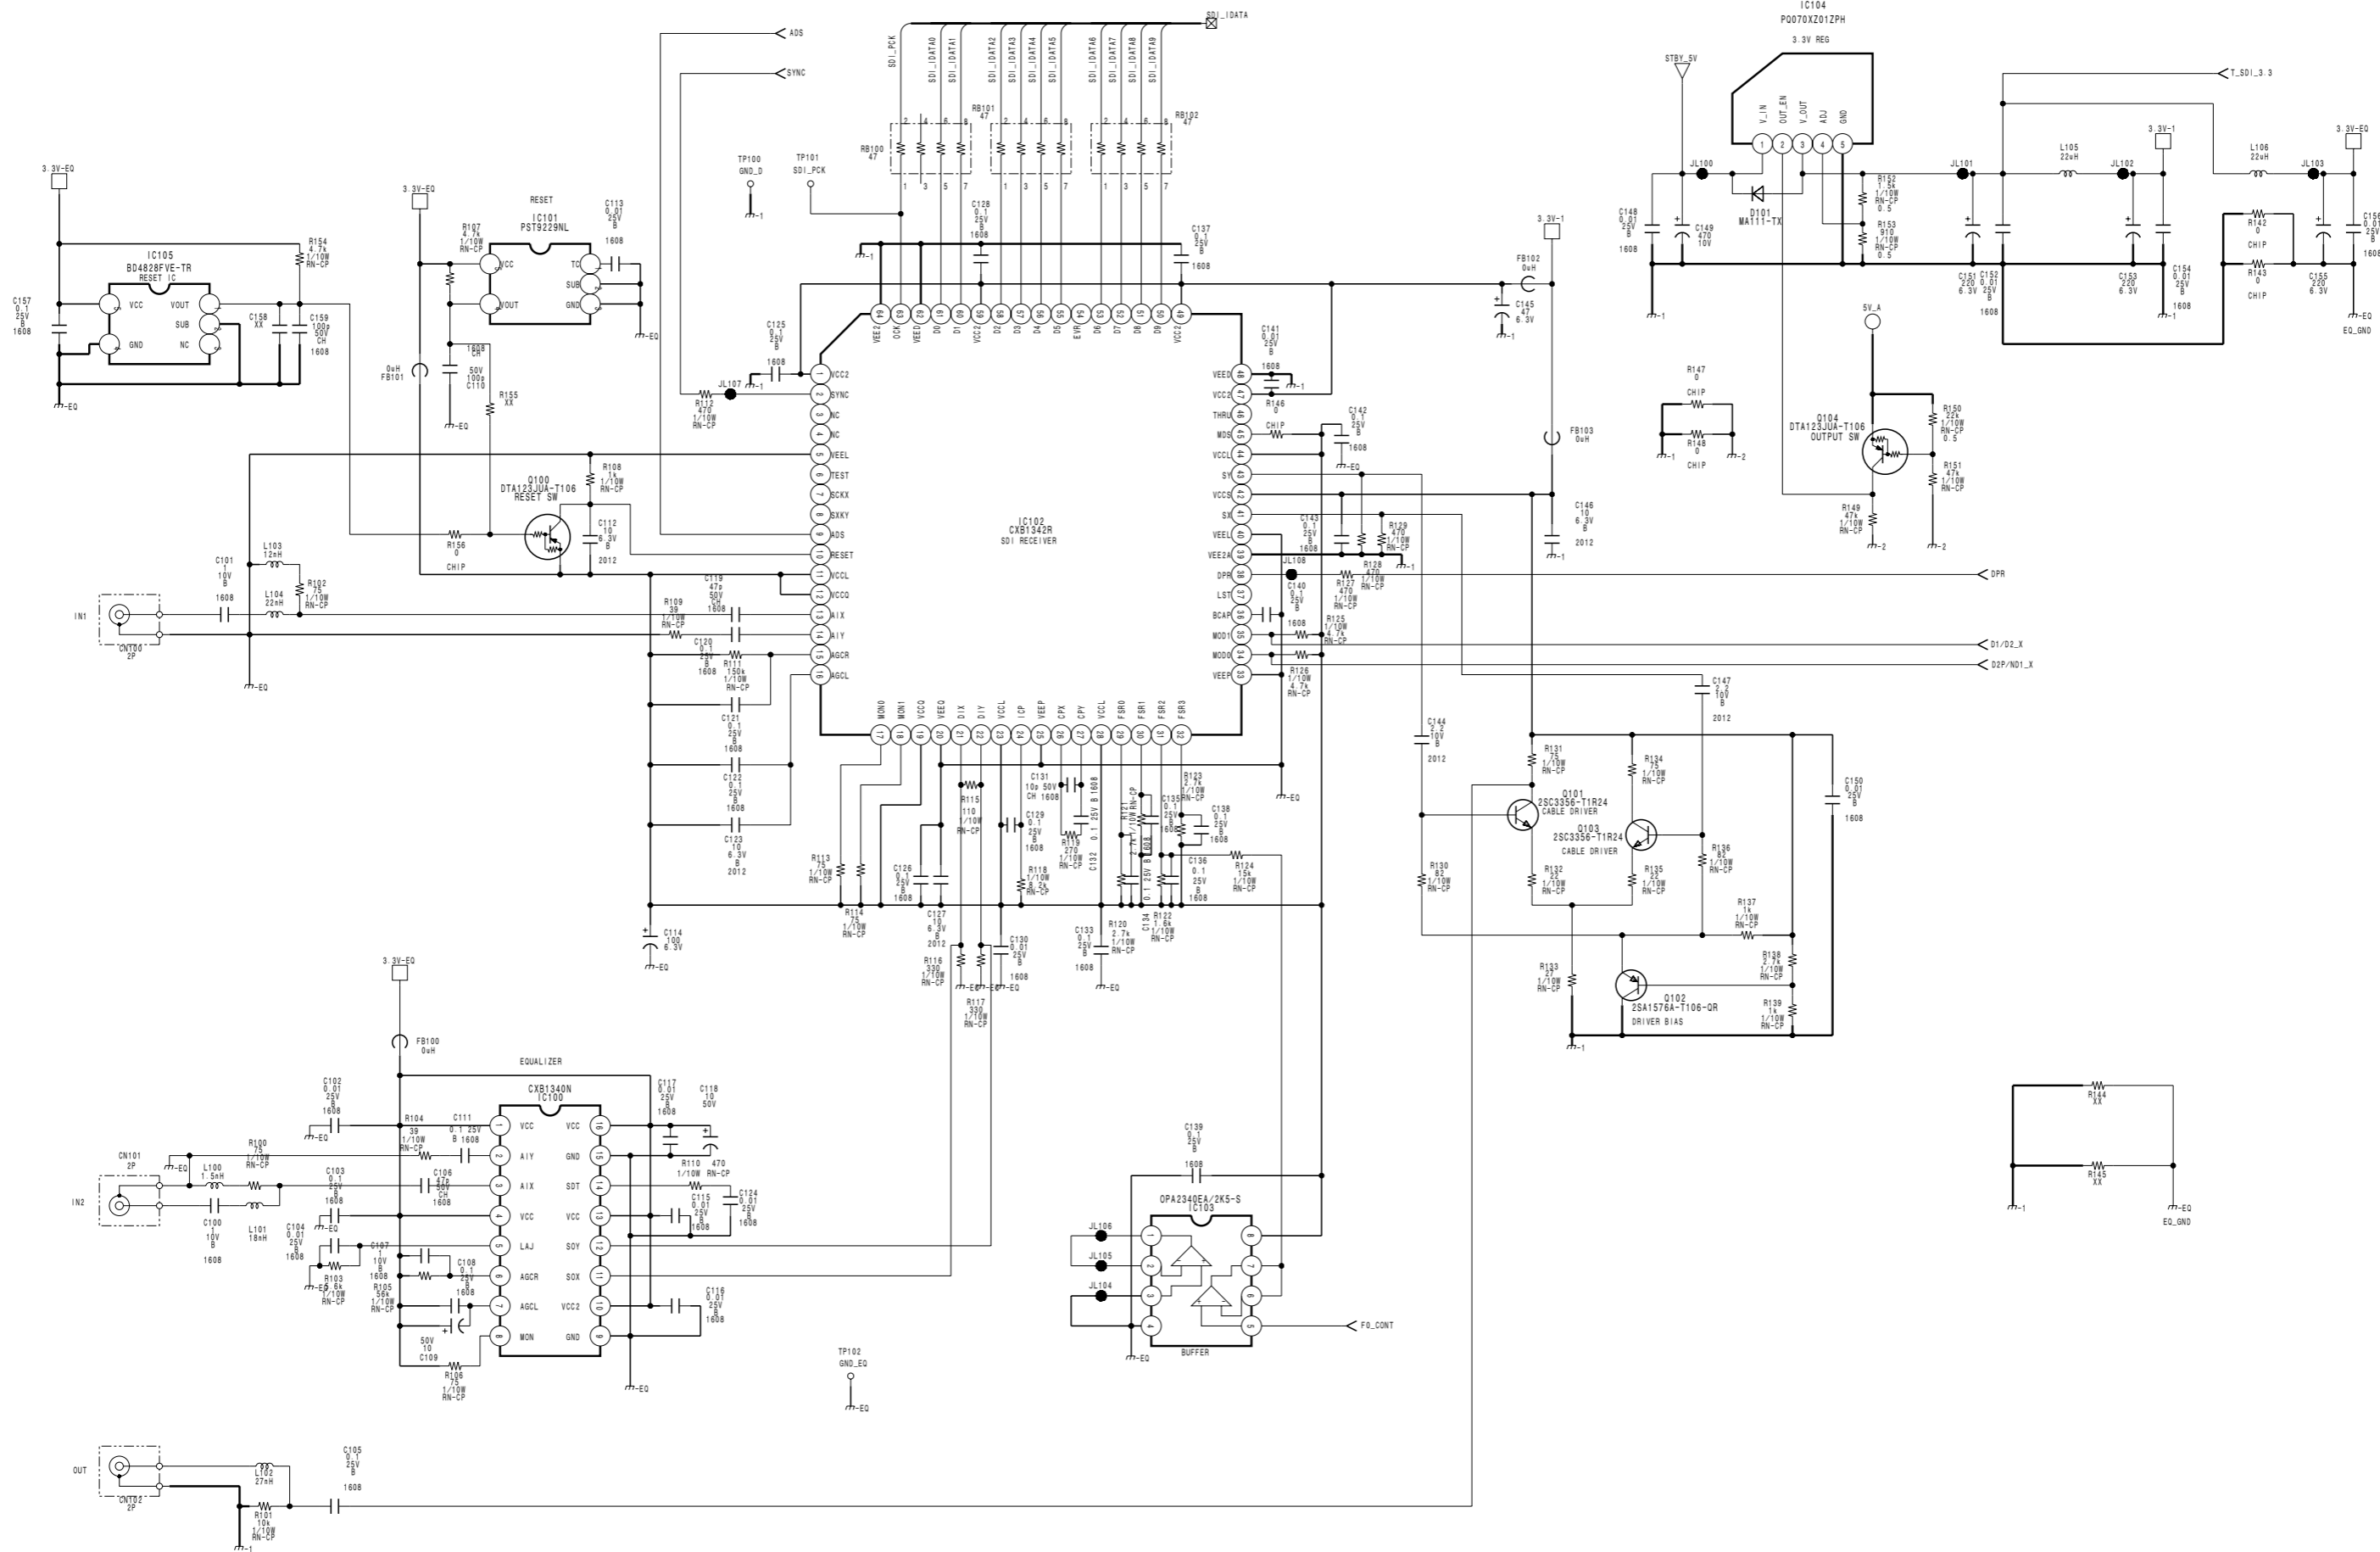

BD (2/8)(BKM-61D)





H


BD (3/8)(BKM-61D)








BD (4/8)(BKM-61D)

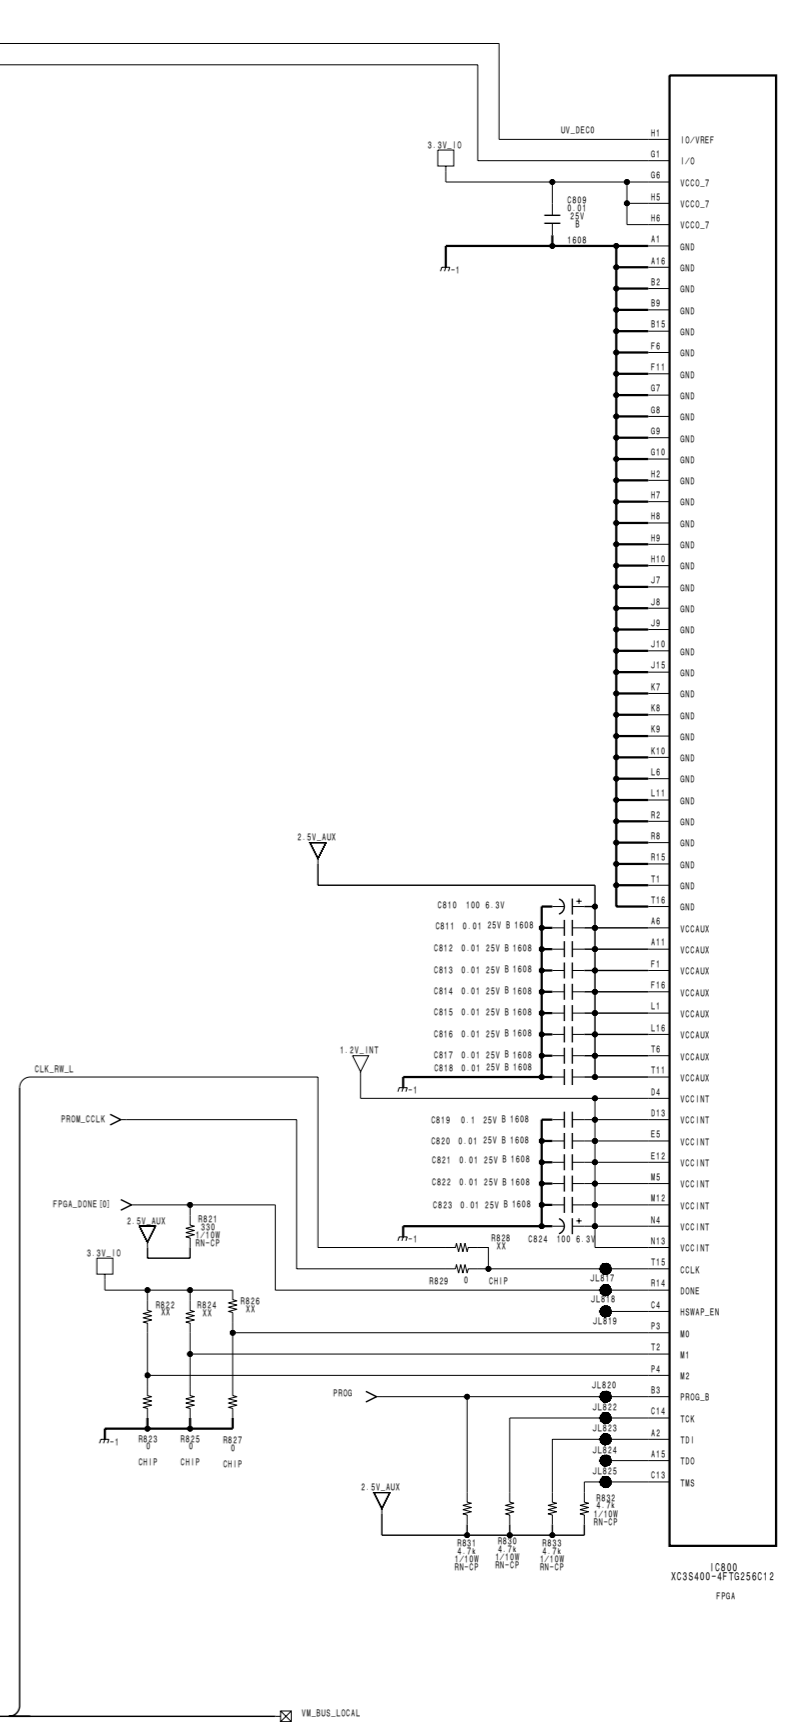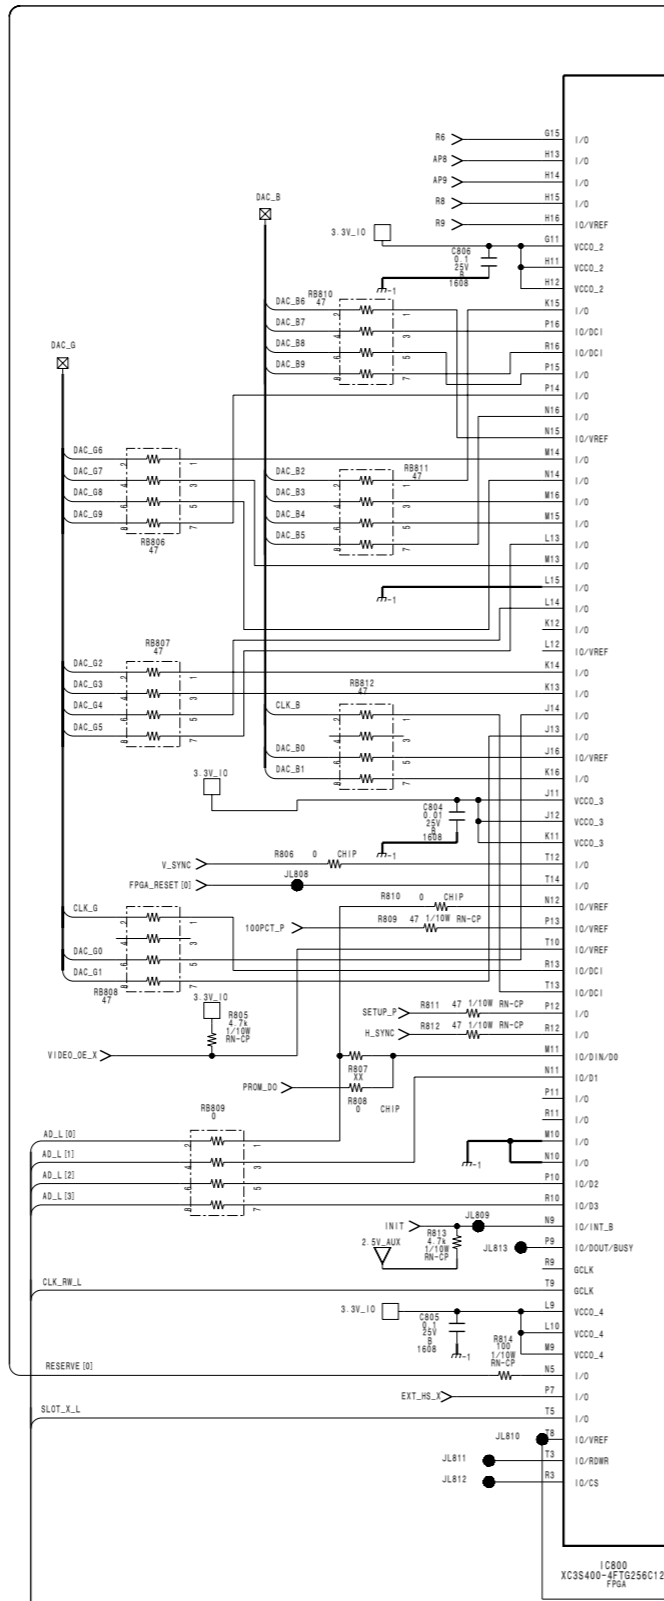

BD (5/8)(BKM-61D)

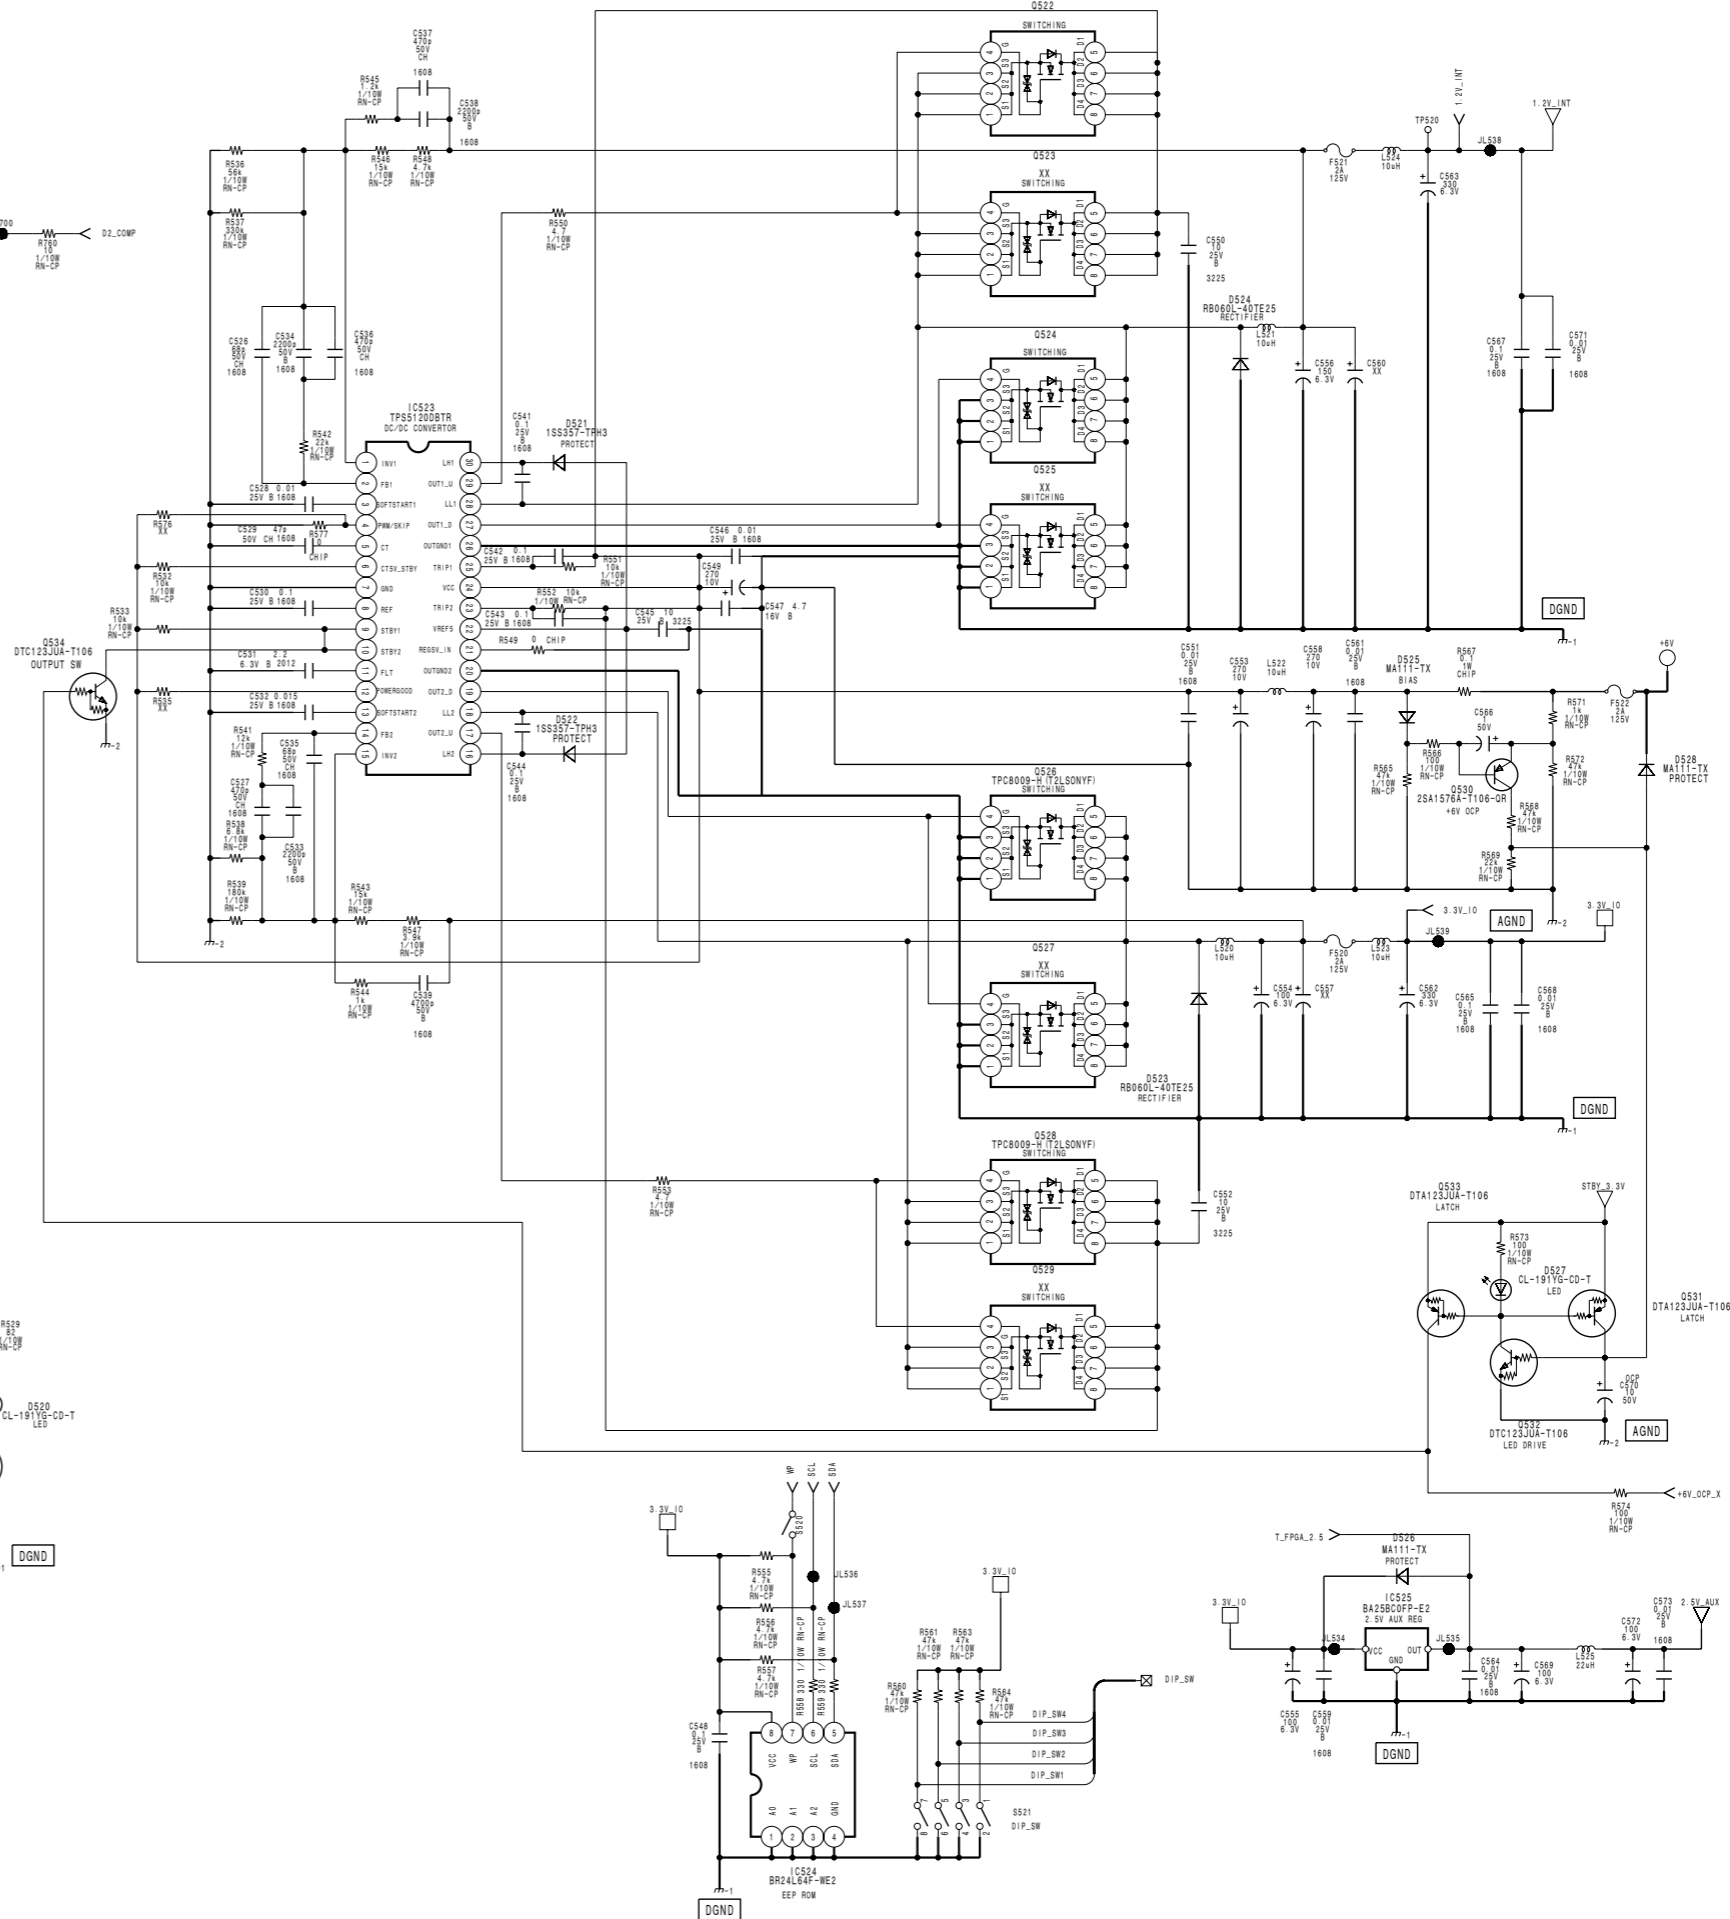


BD (6/8)(BKM-61D)

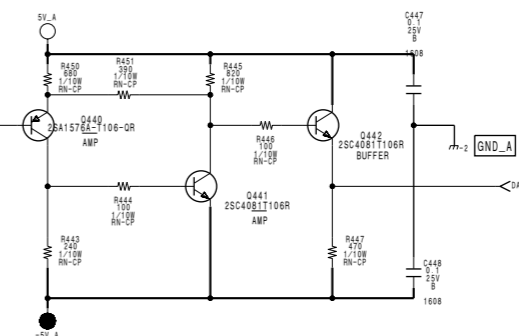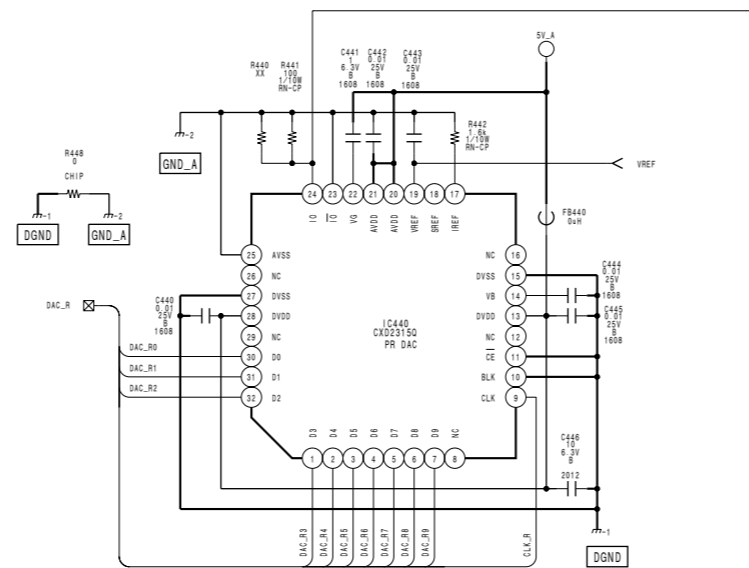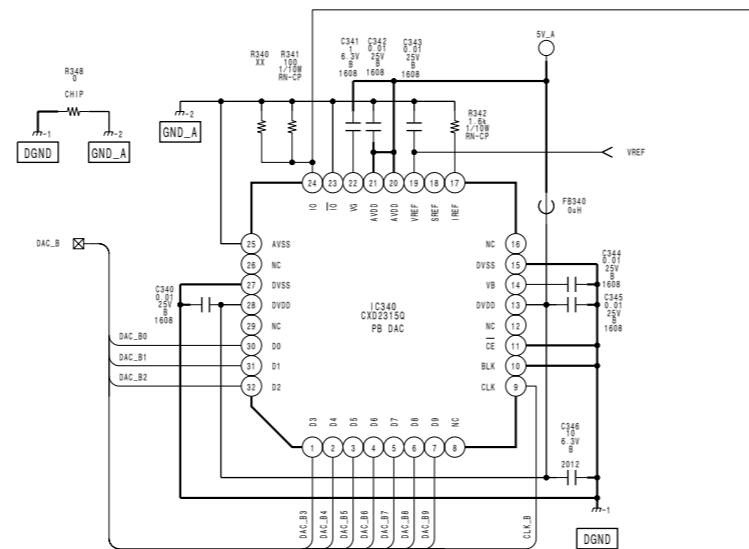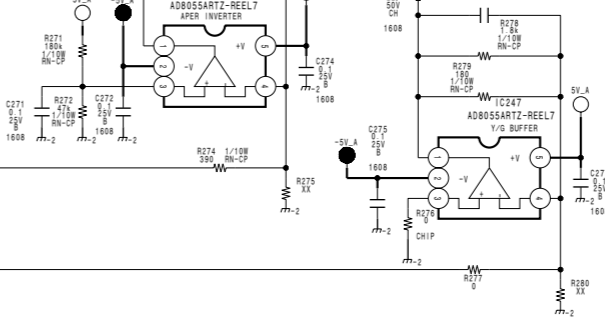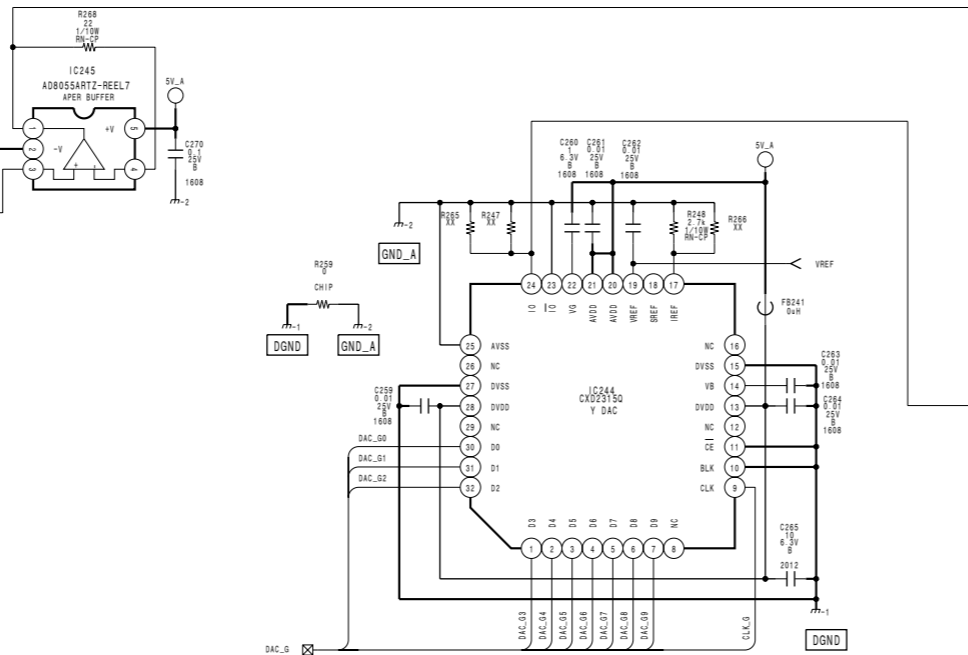

BD (7/8)(BKM-61D)




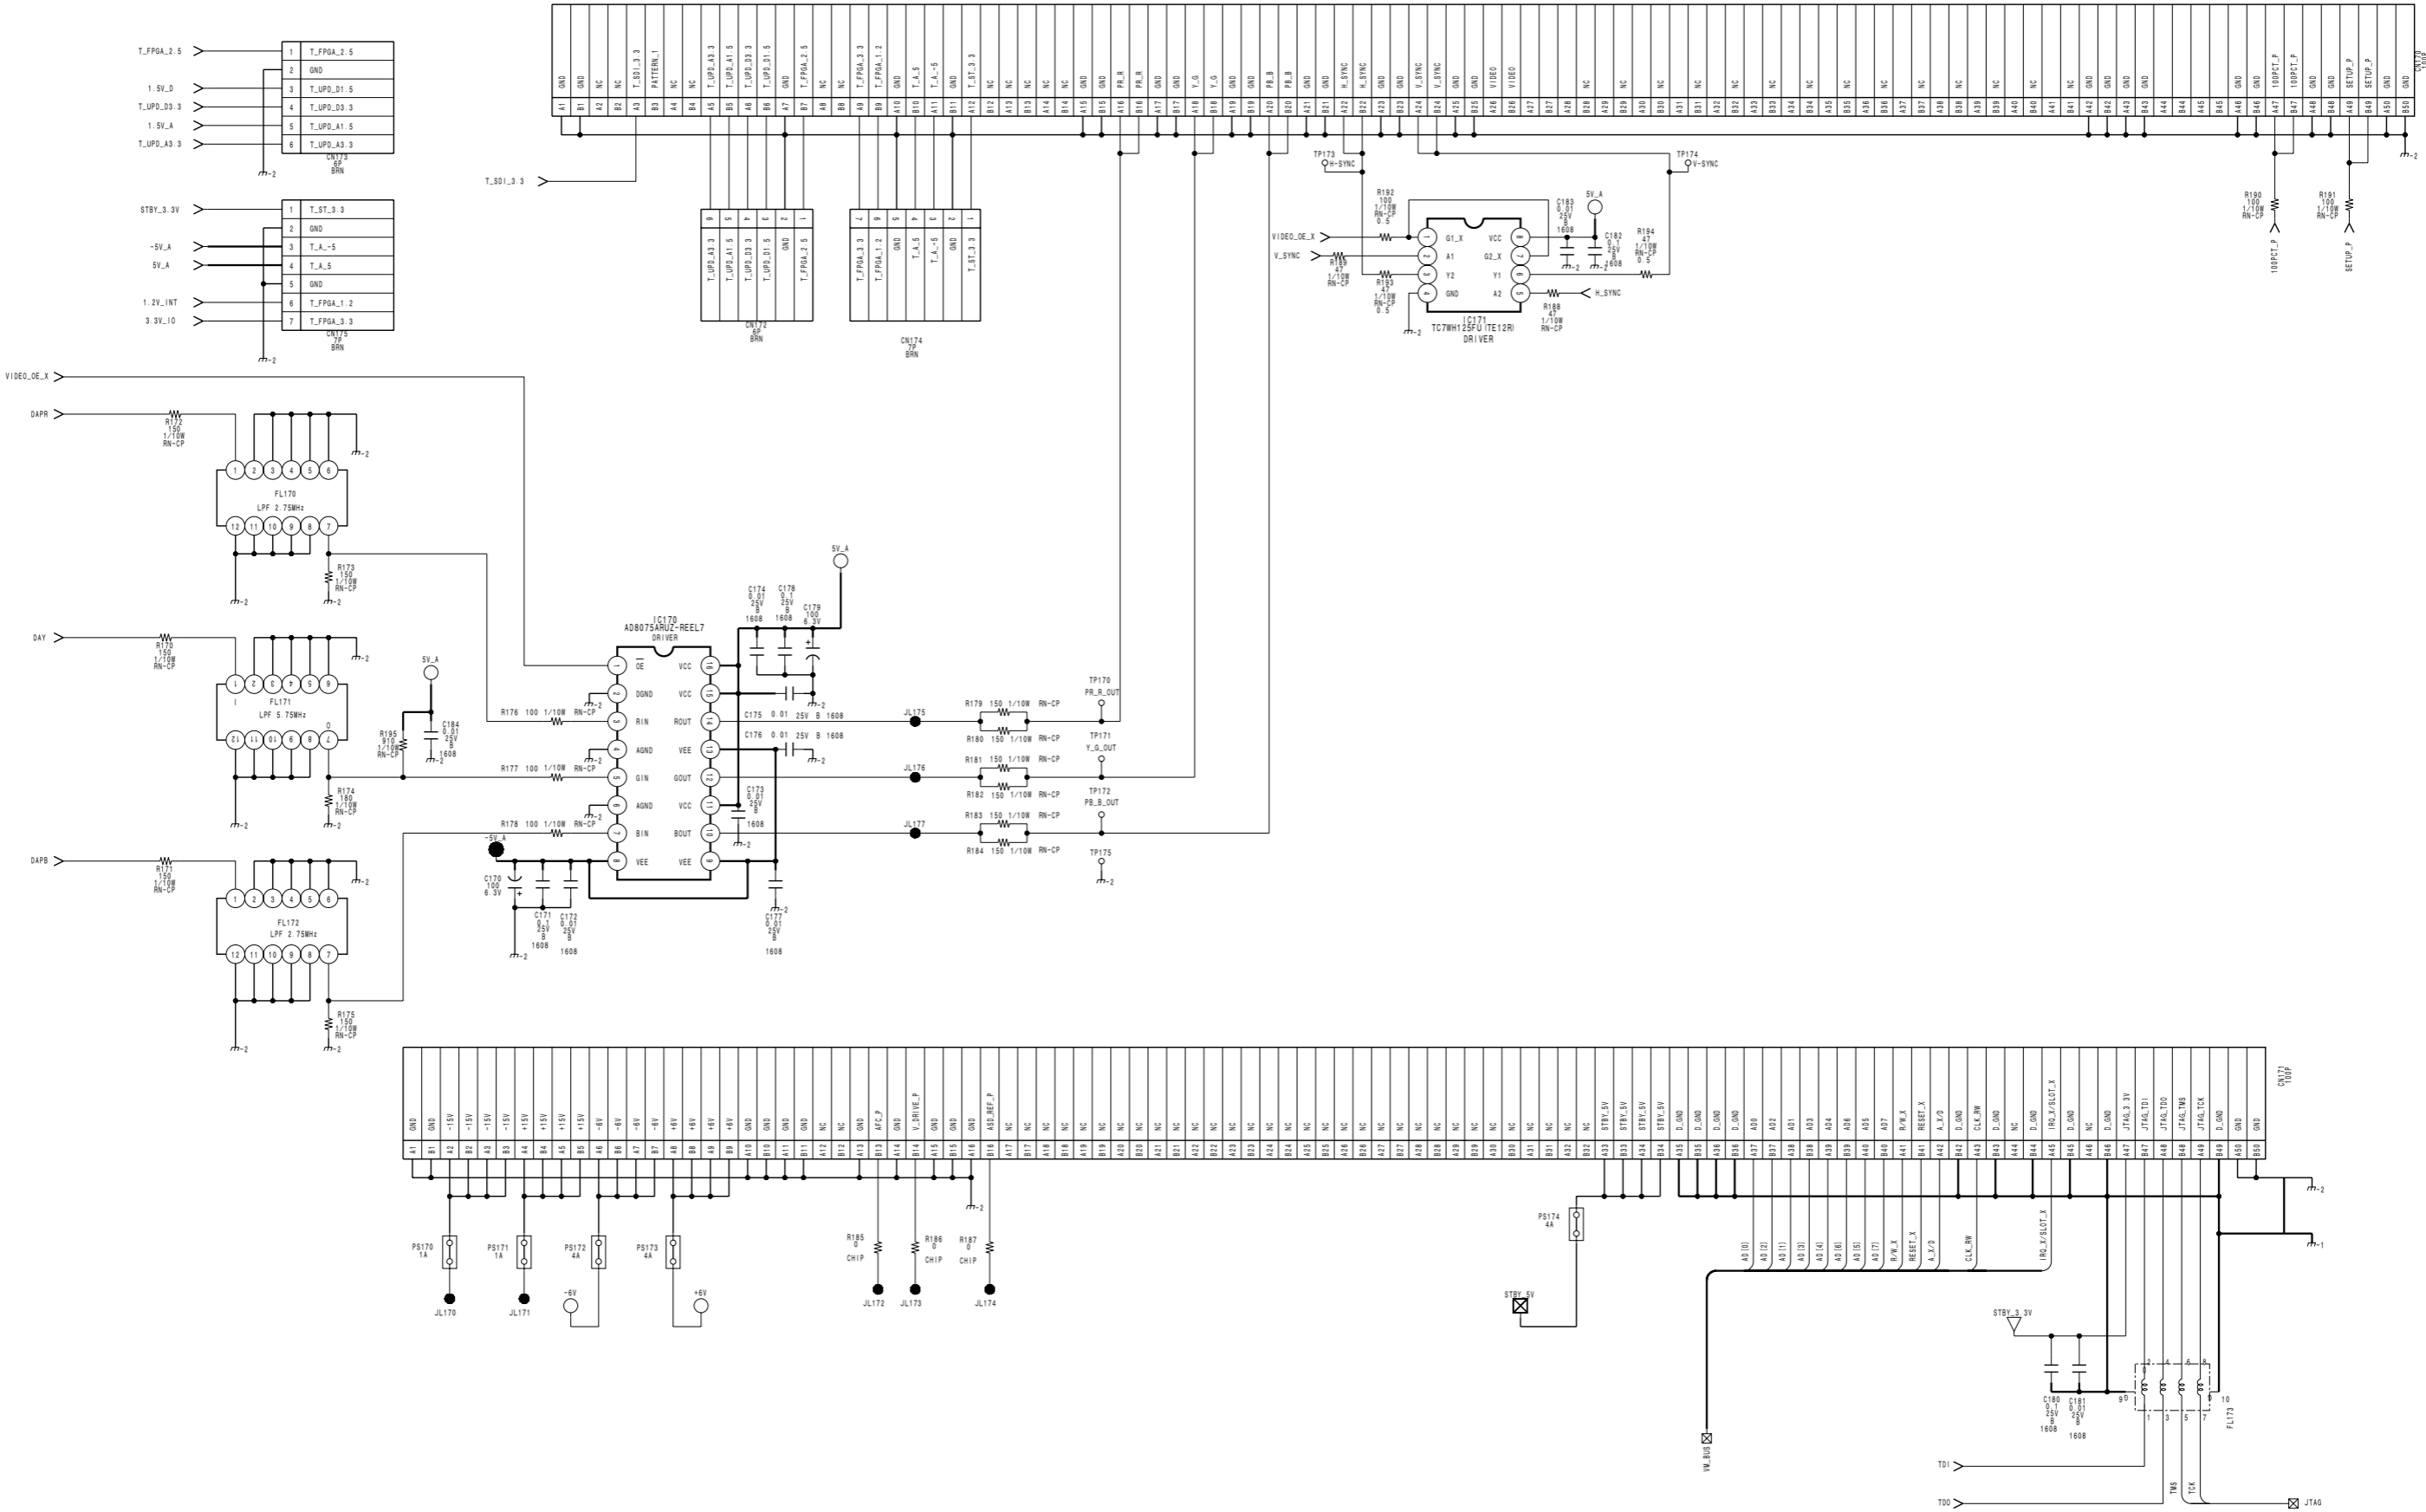

BHS (1/9)(BKM-62HS)




H

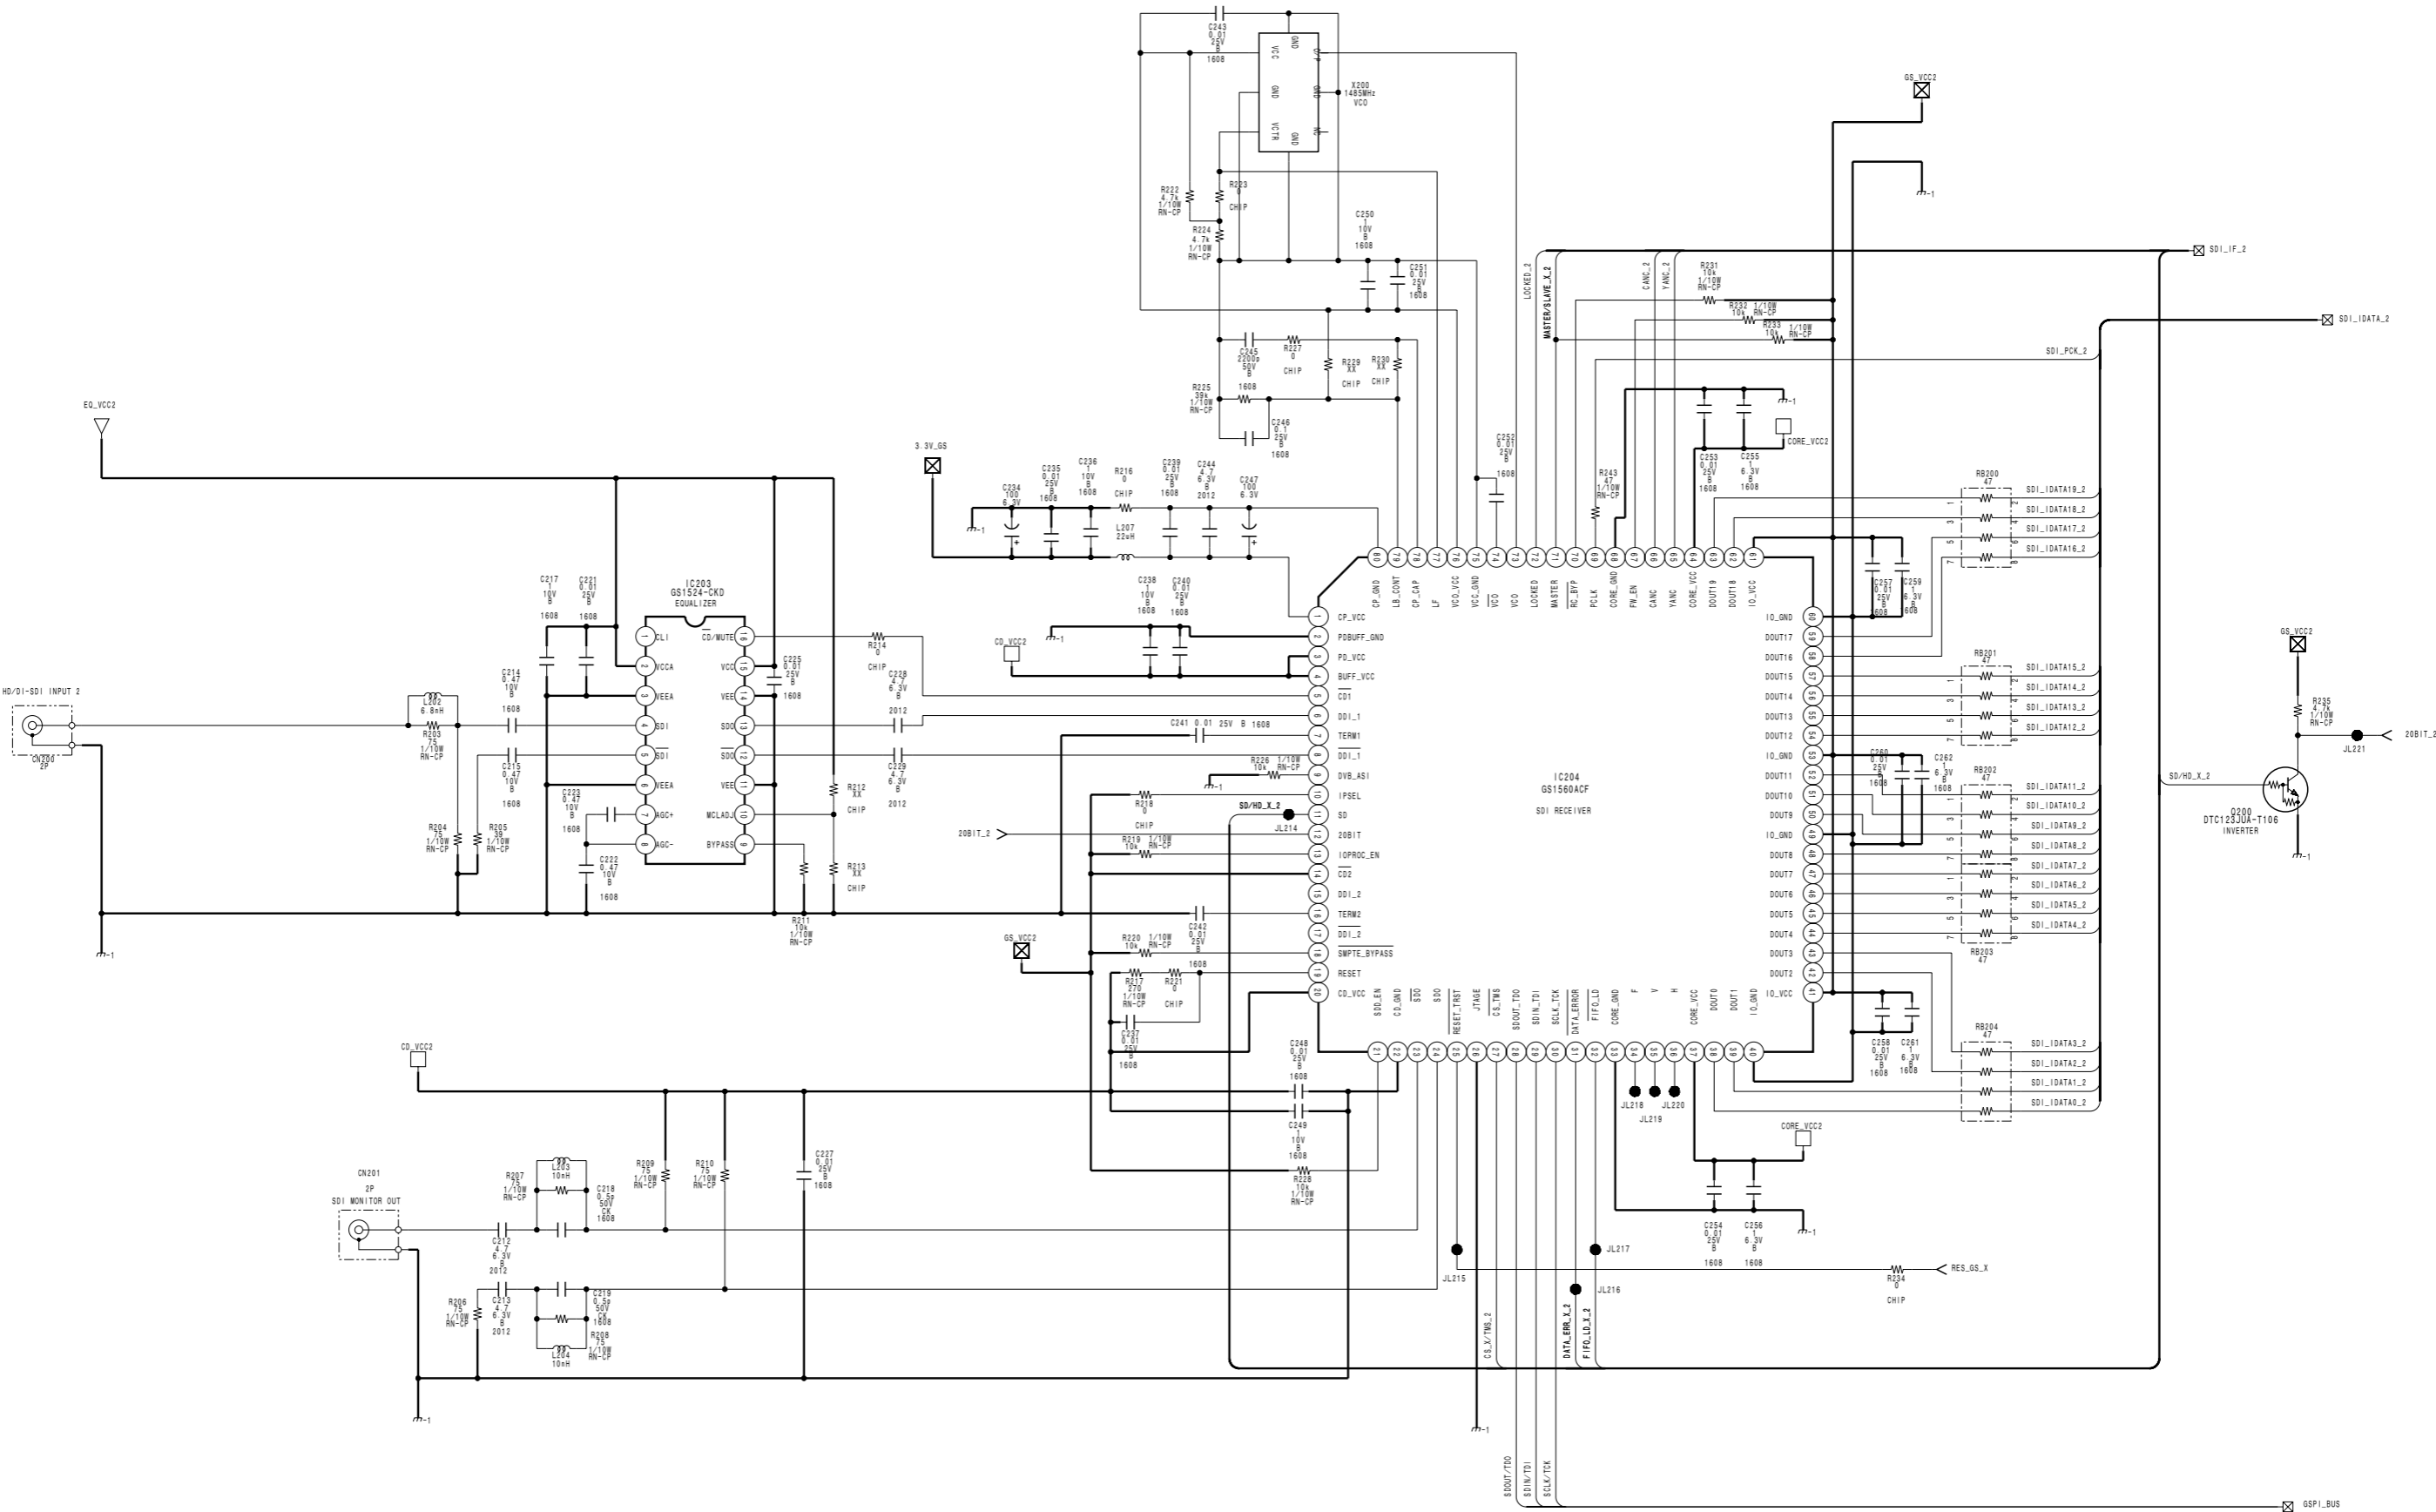





BHS (3/9)(BKM-62HS)


5

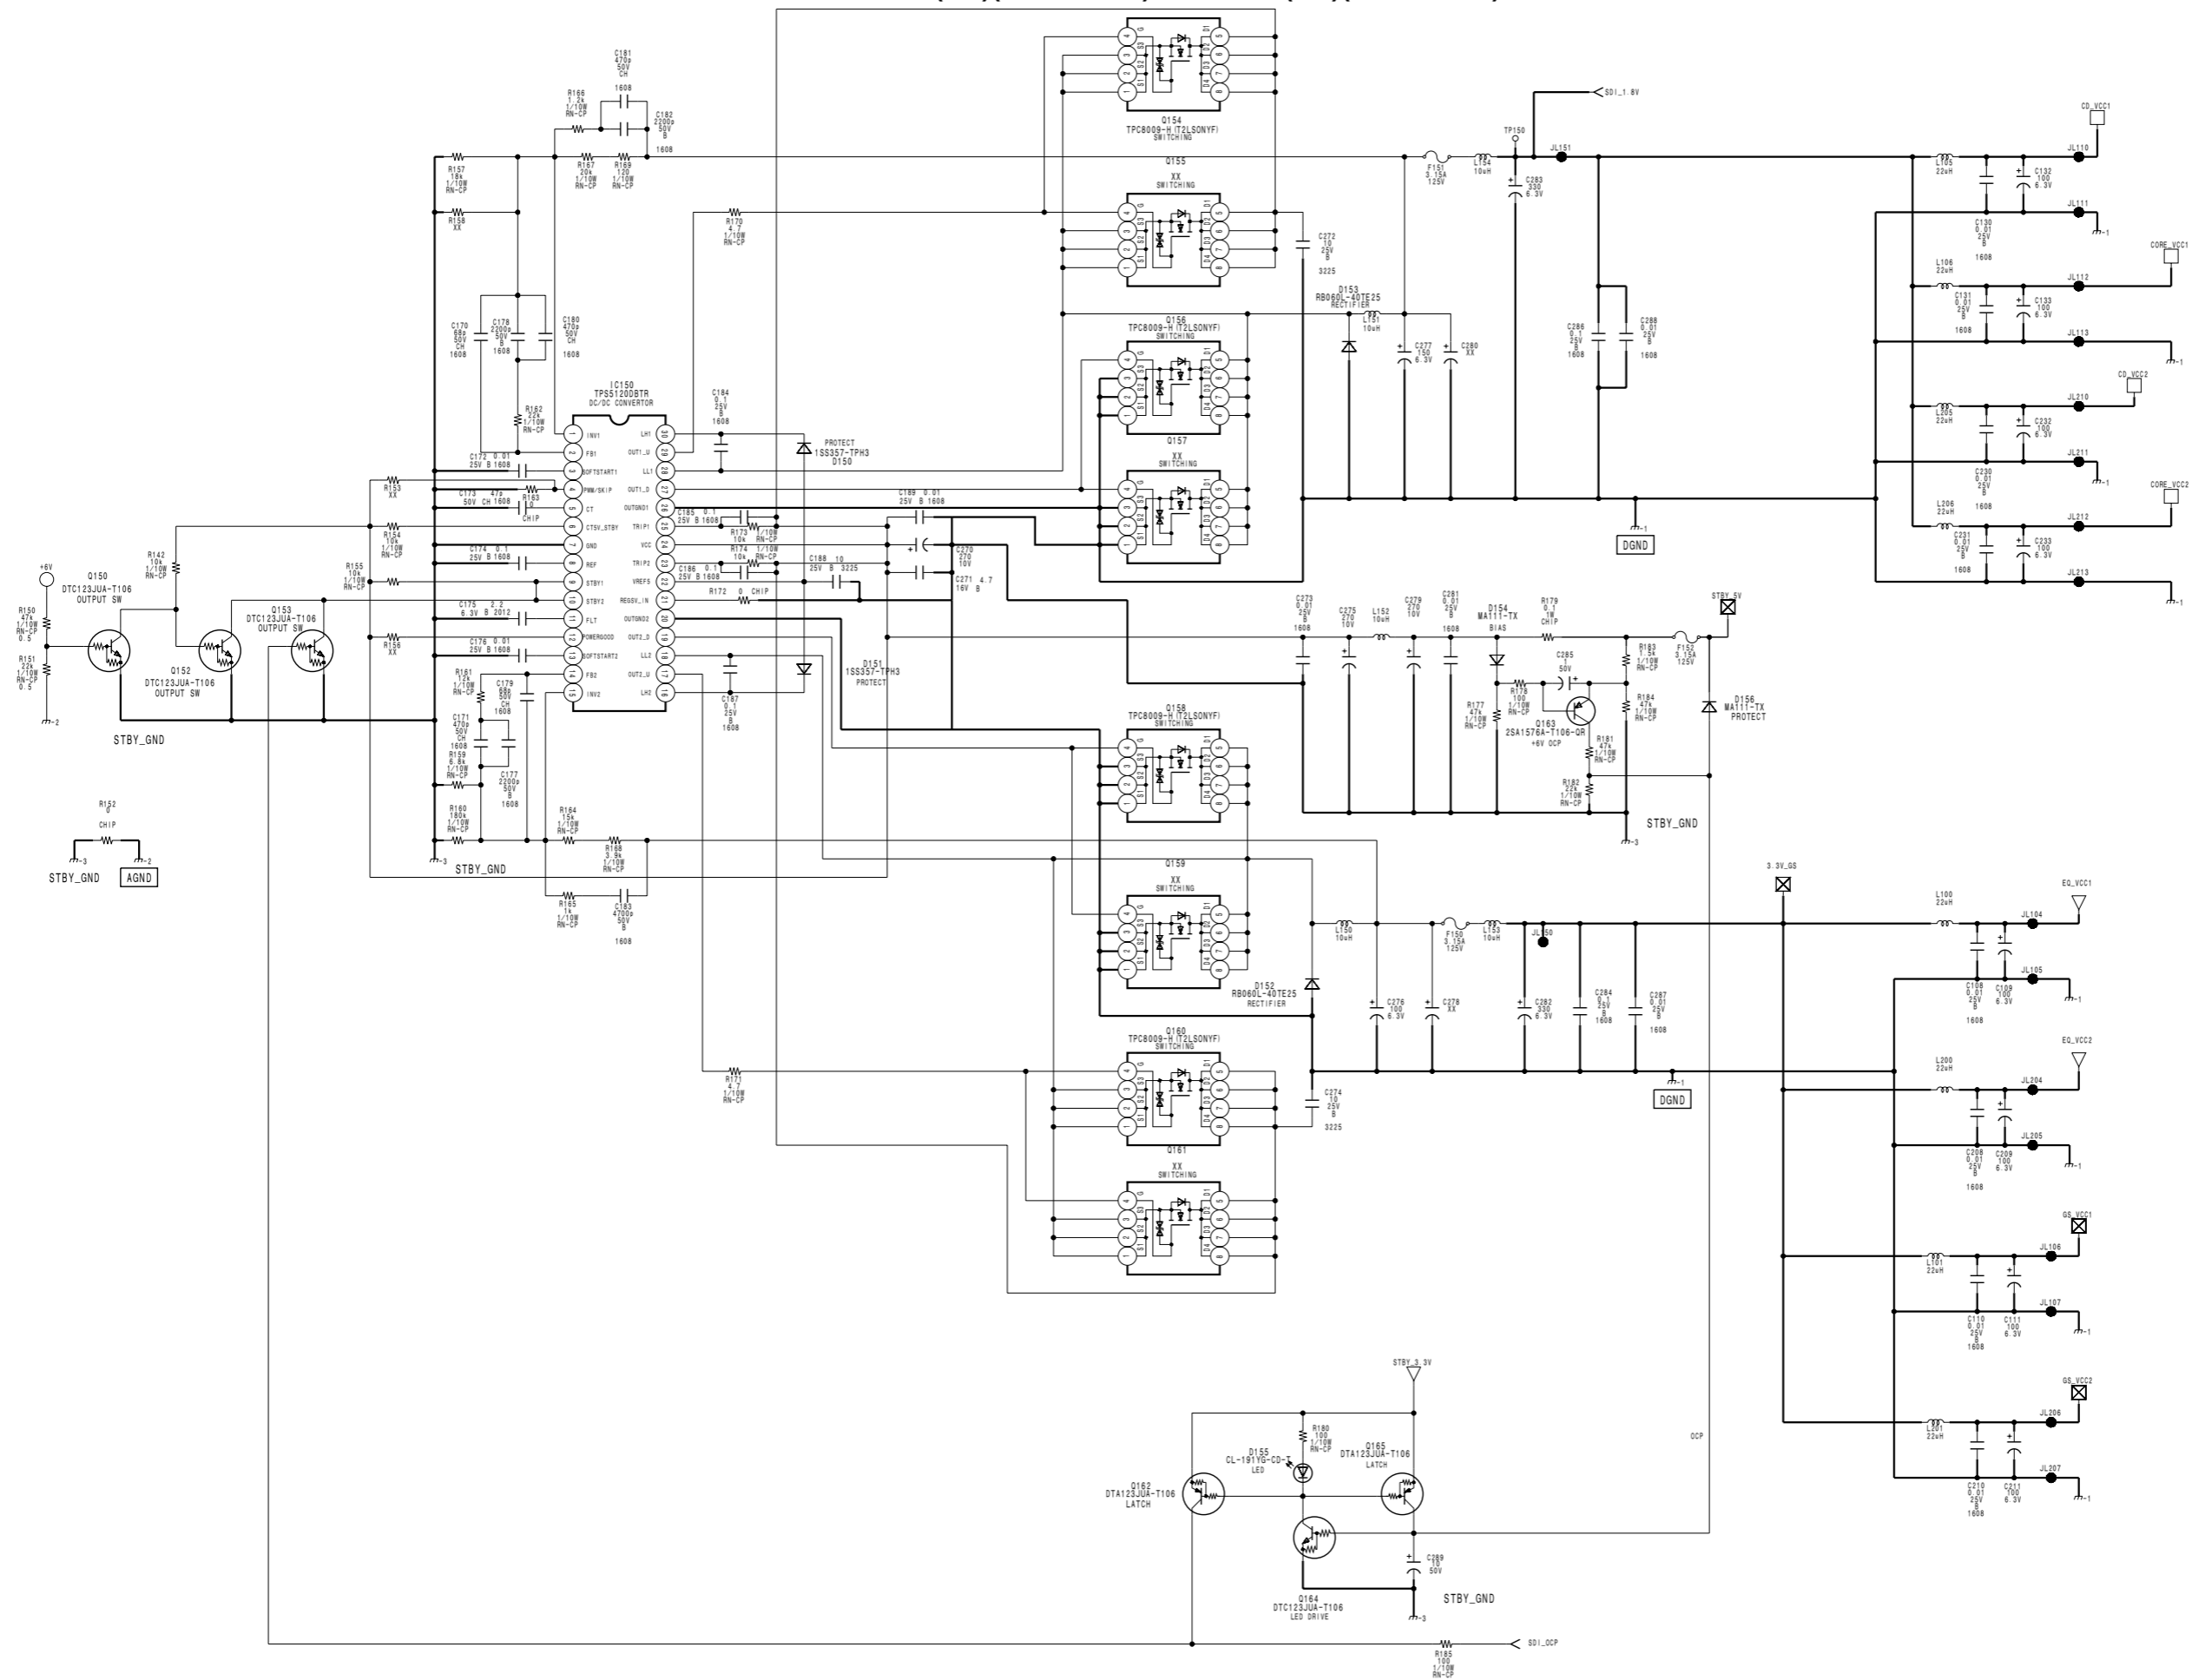

6-12



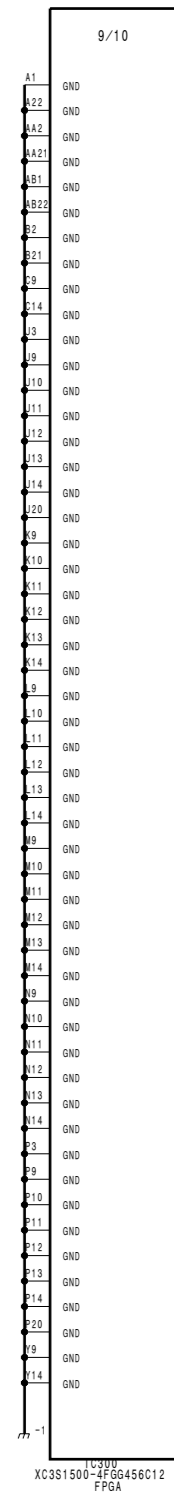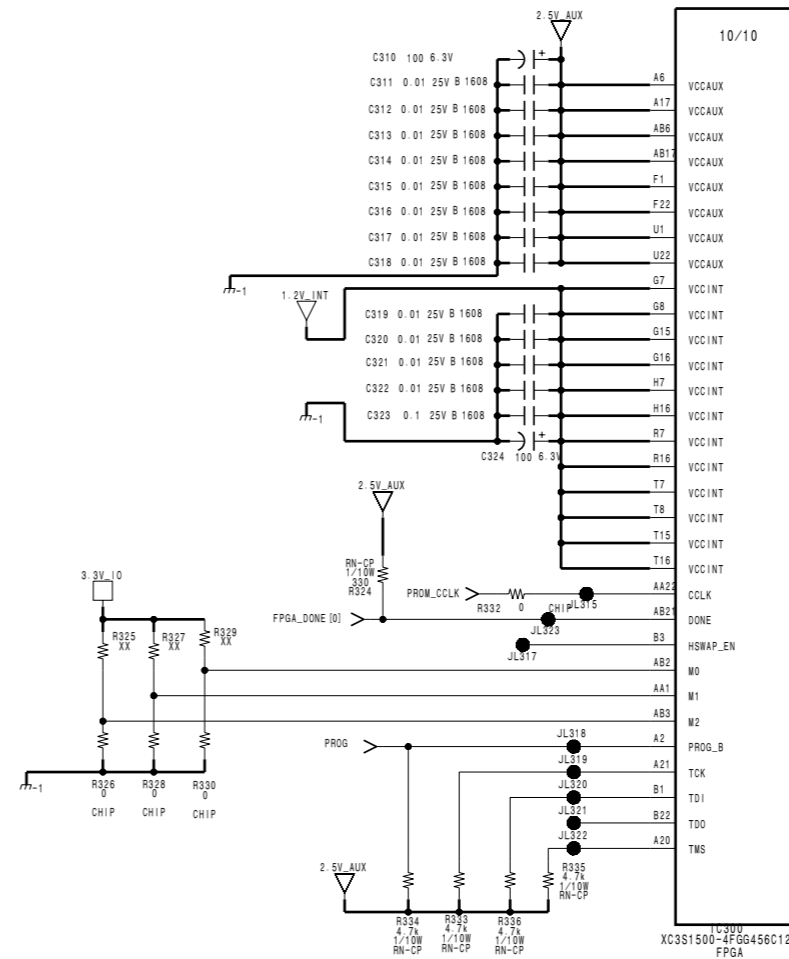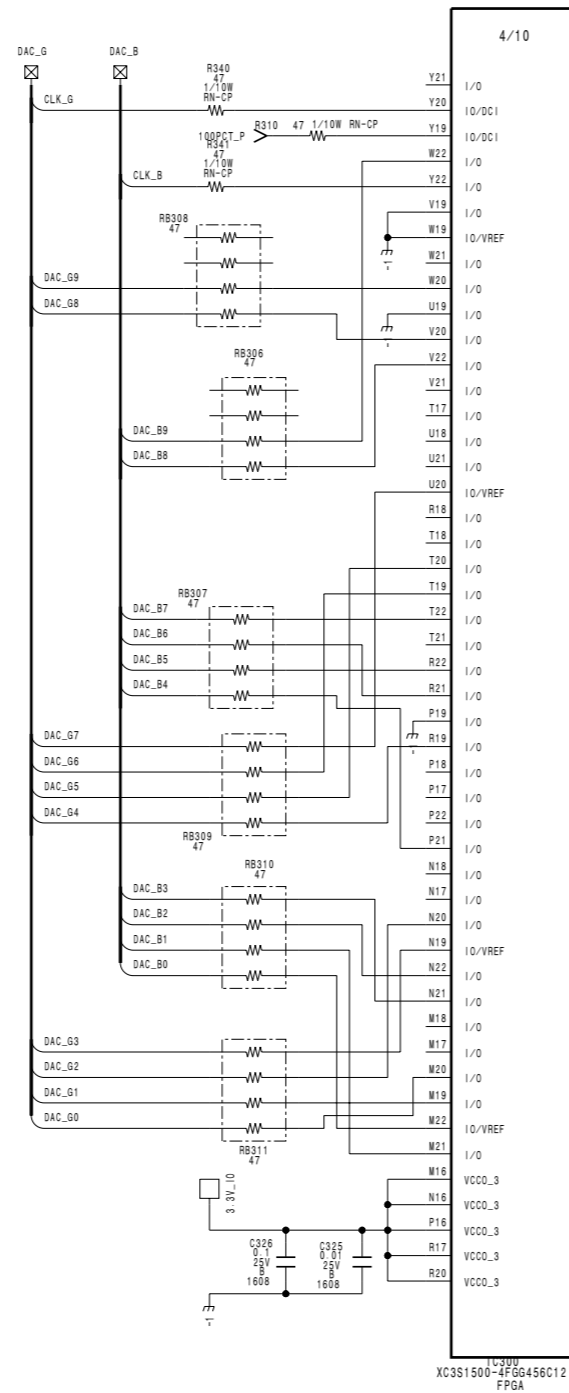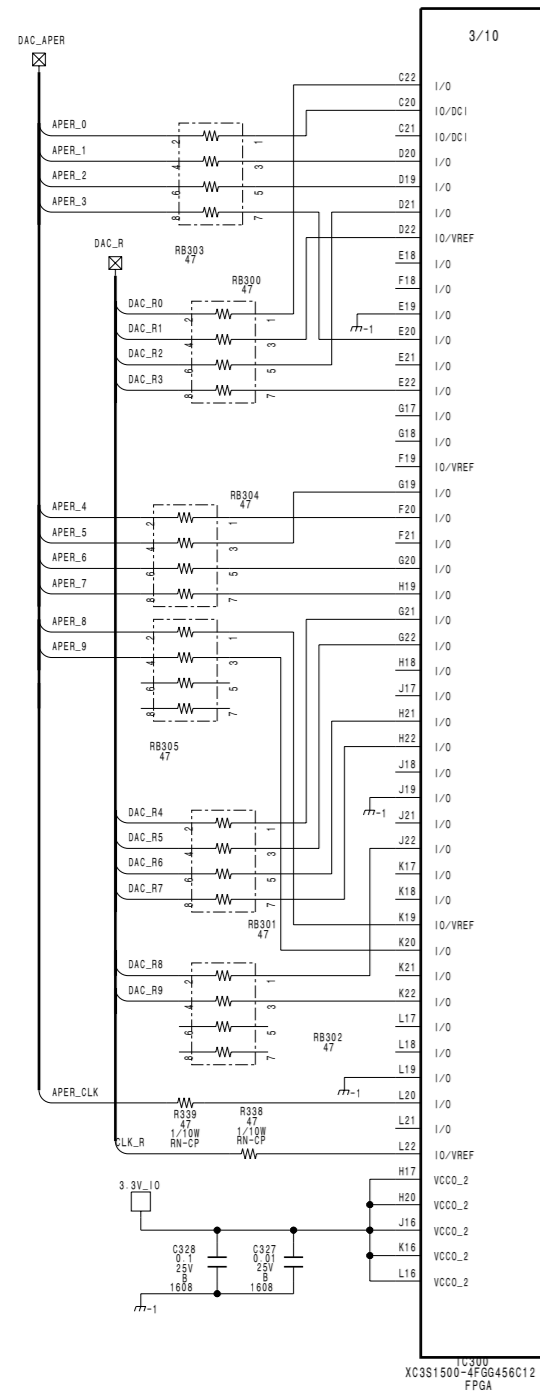

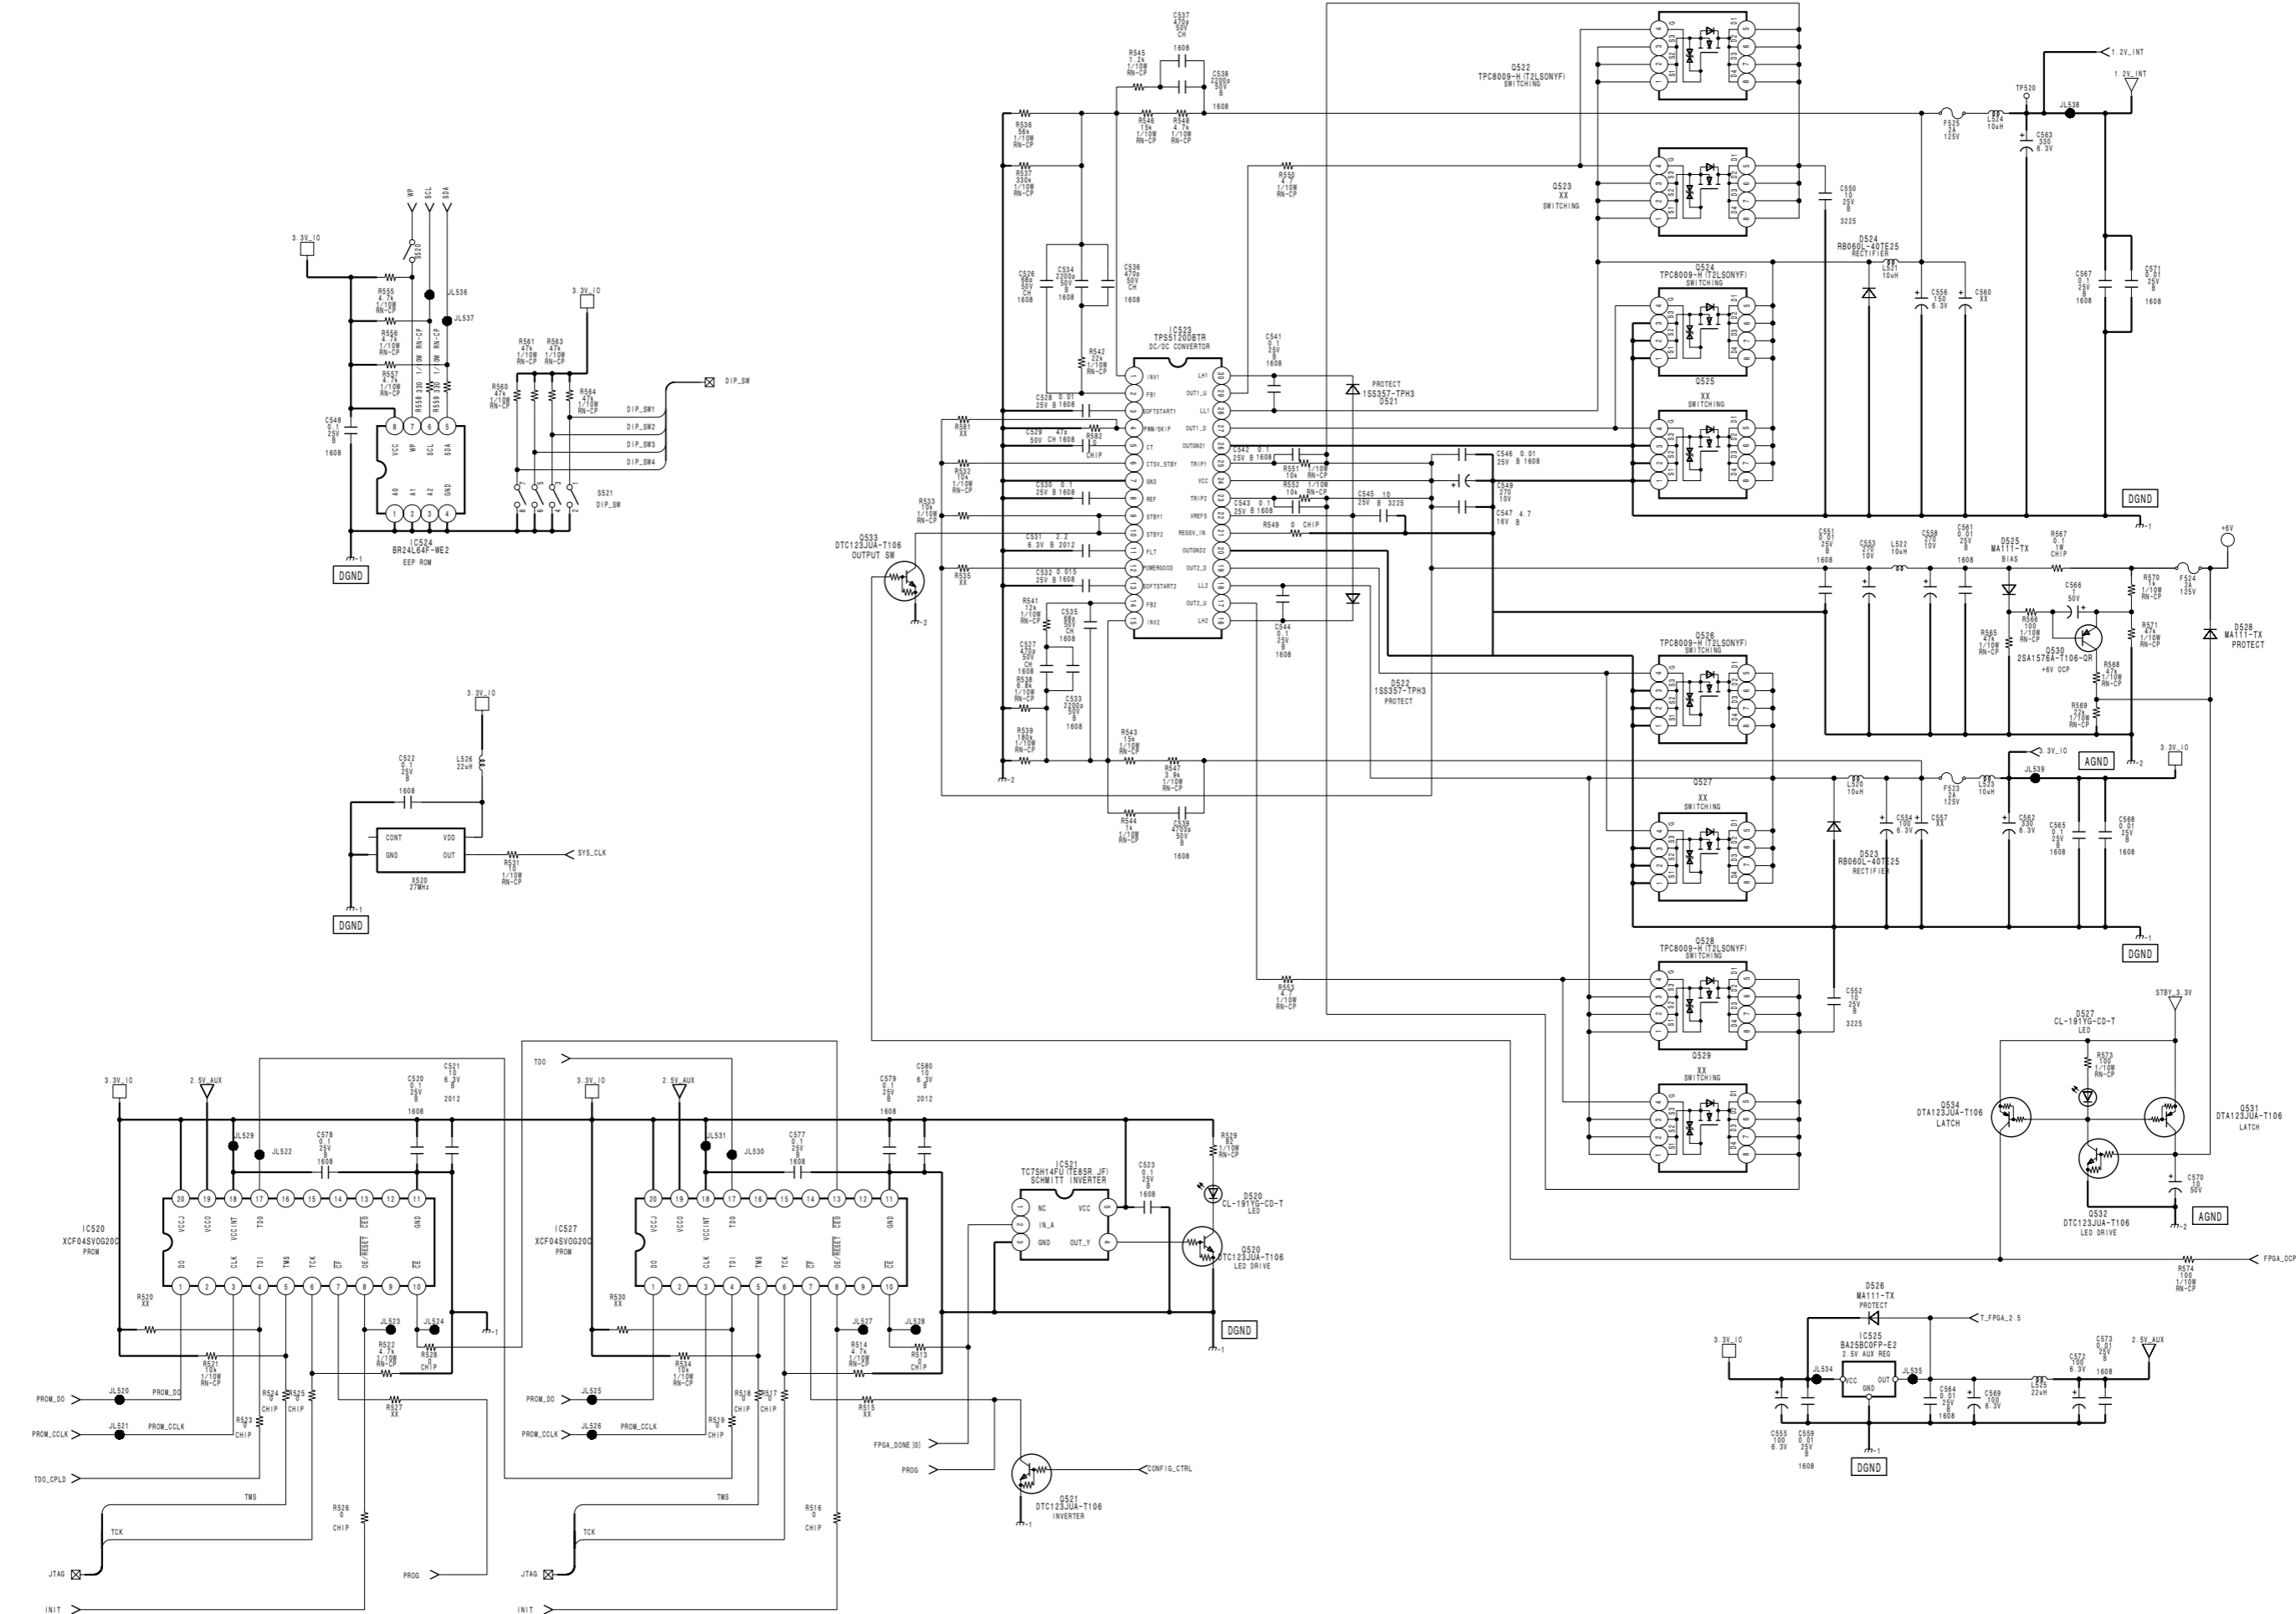

1

2

3

4

5

A

B

C











D

E

F

G


H

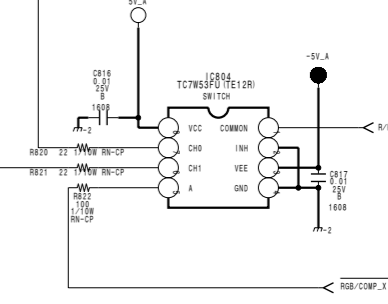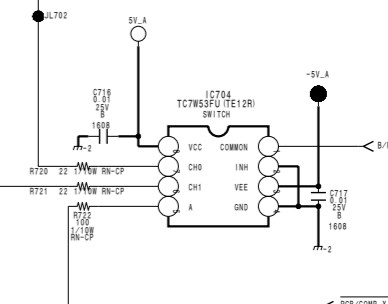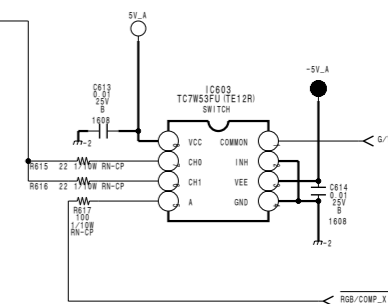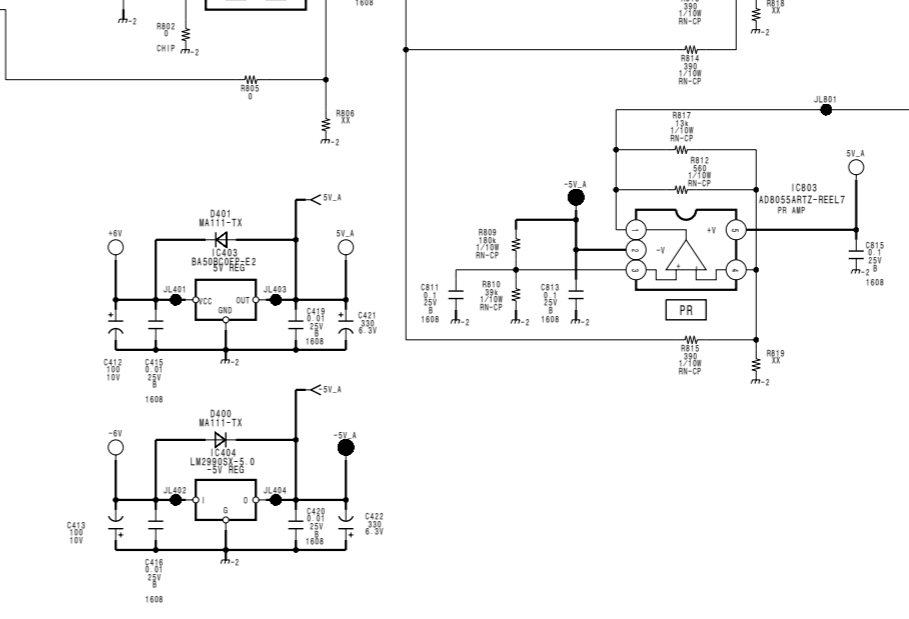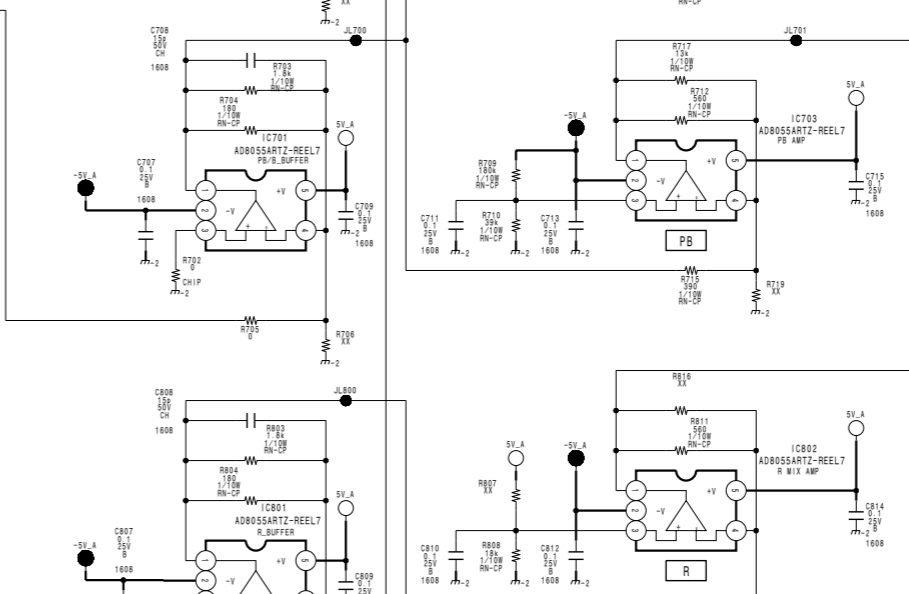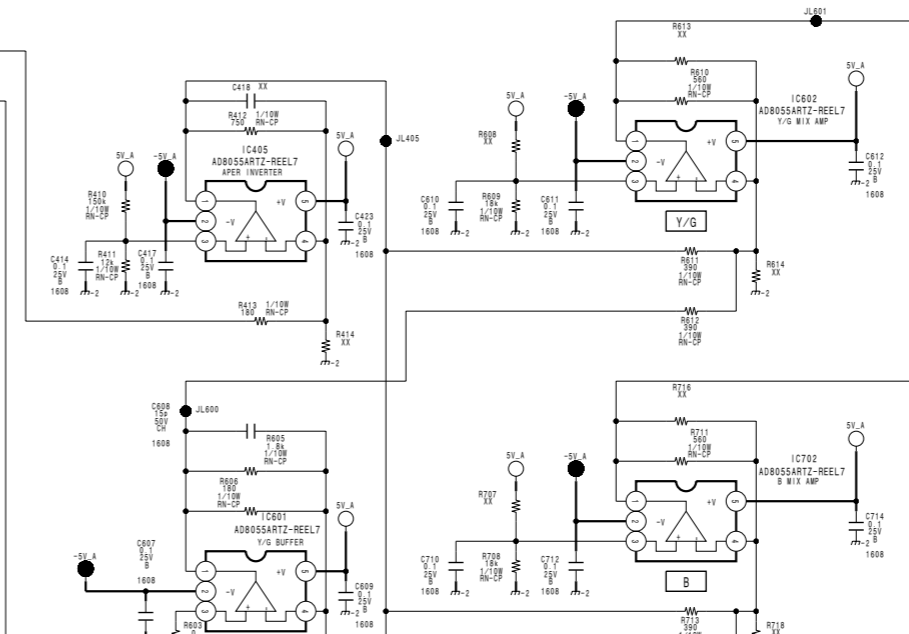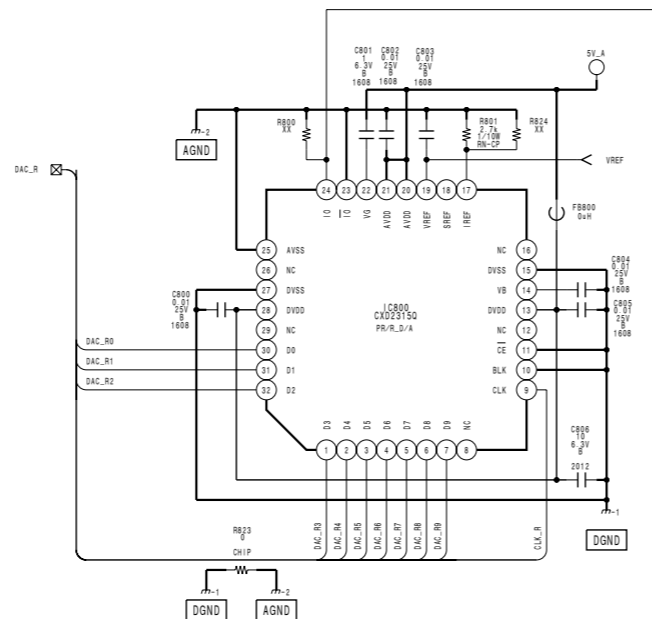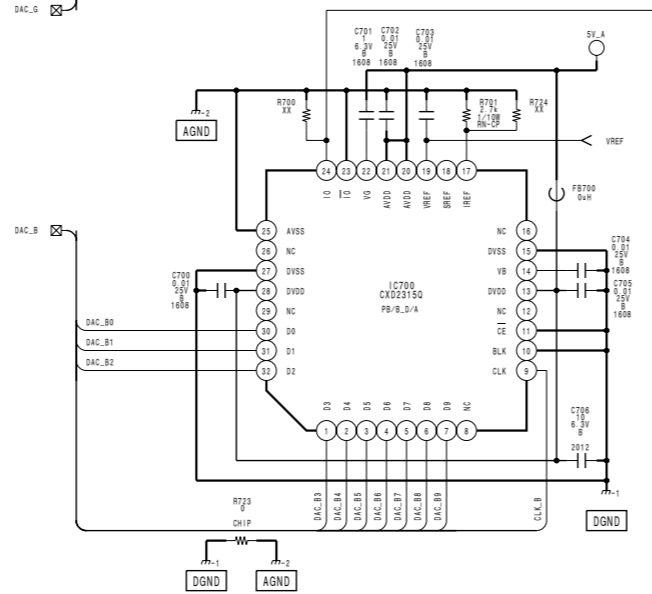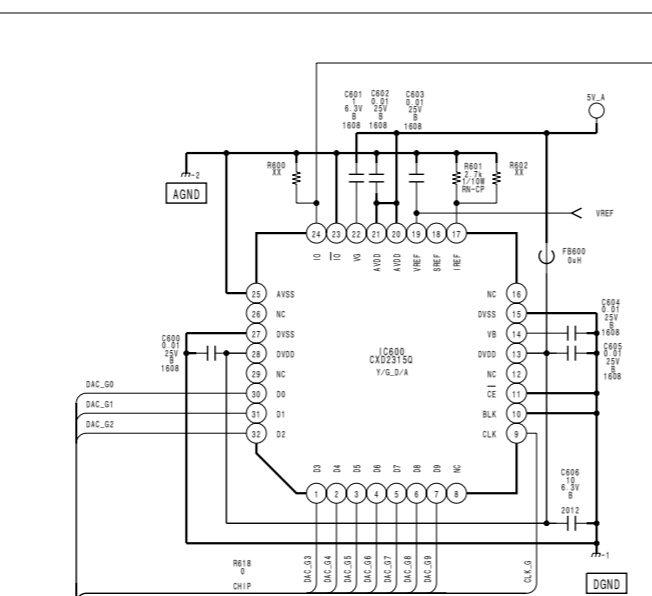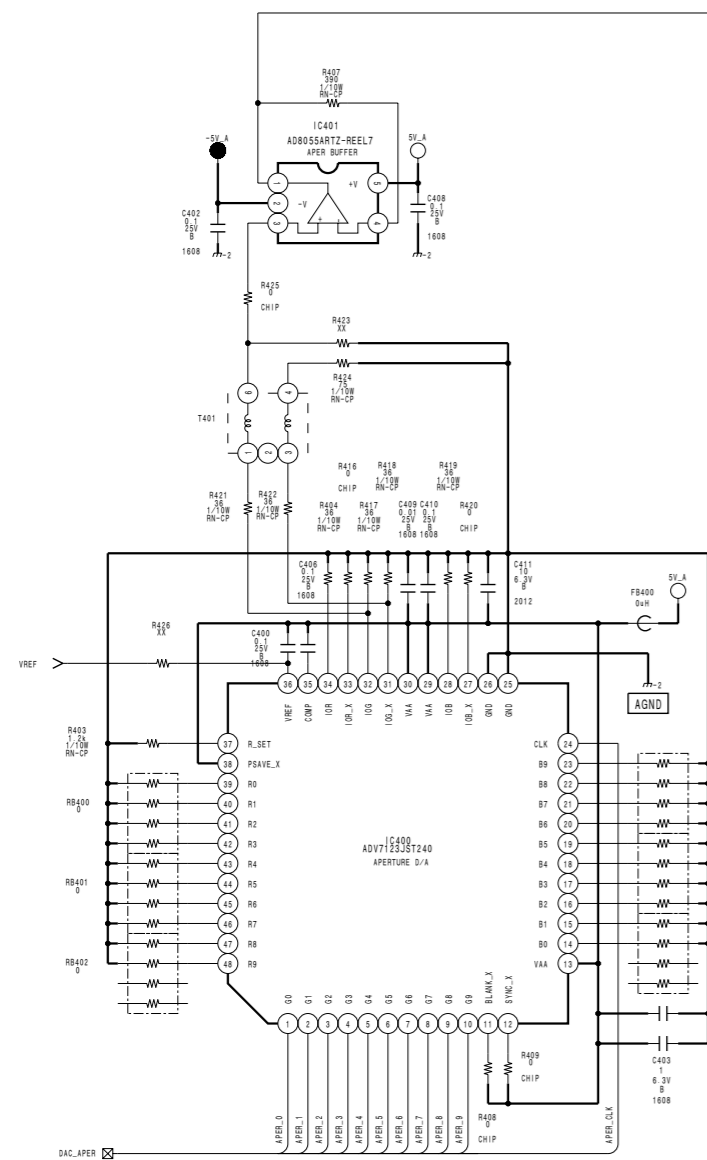

BHS (8/9)(BKM-62HS)


BHS (9/9)(BKM-62HS)

5

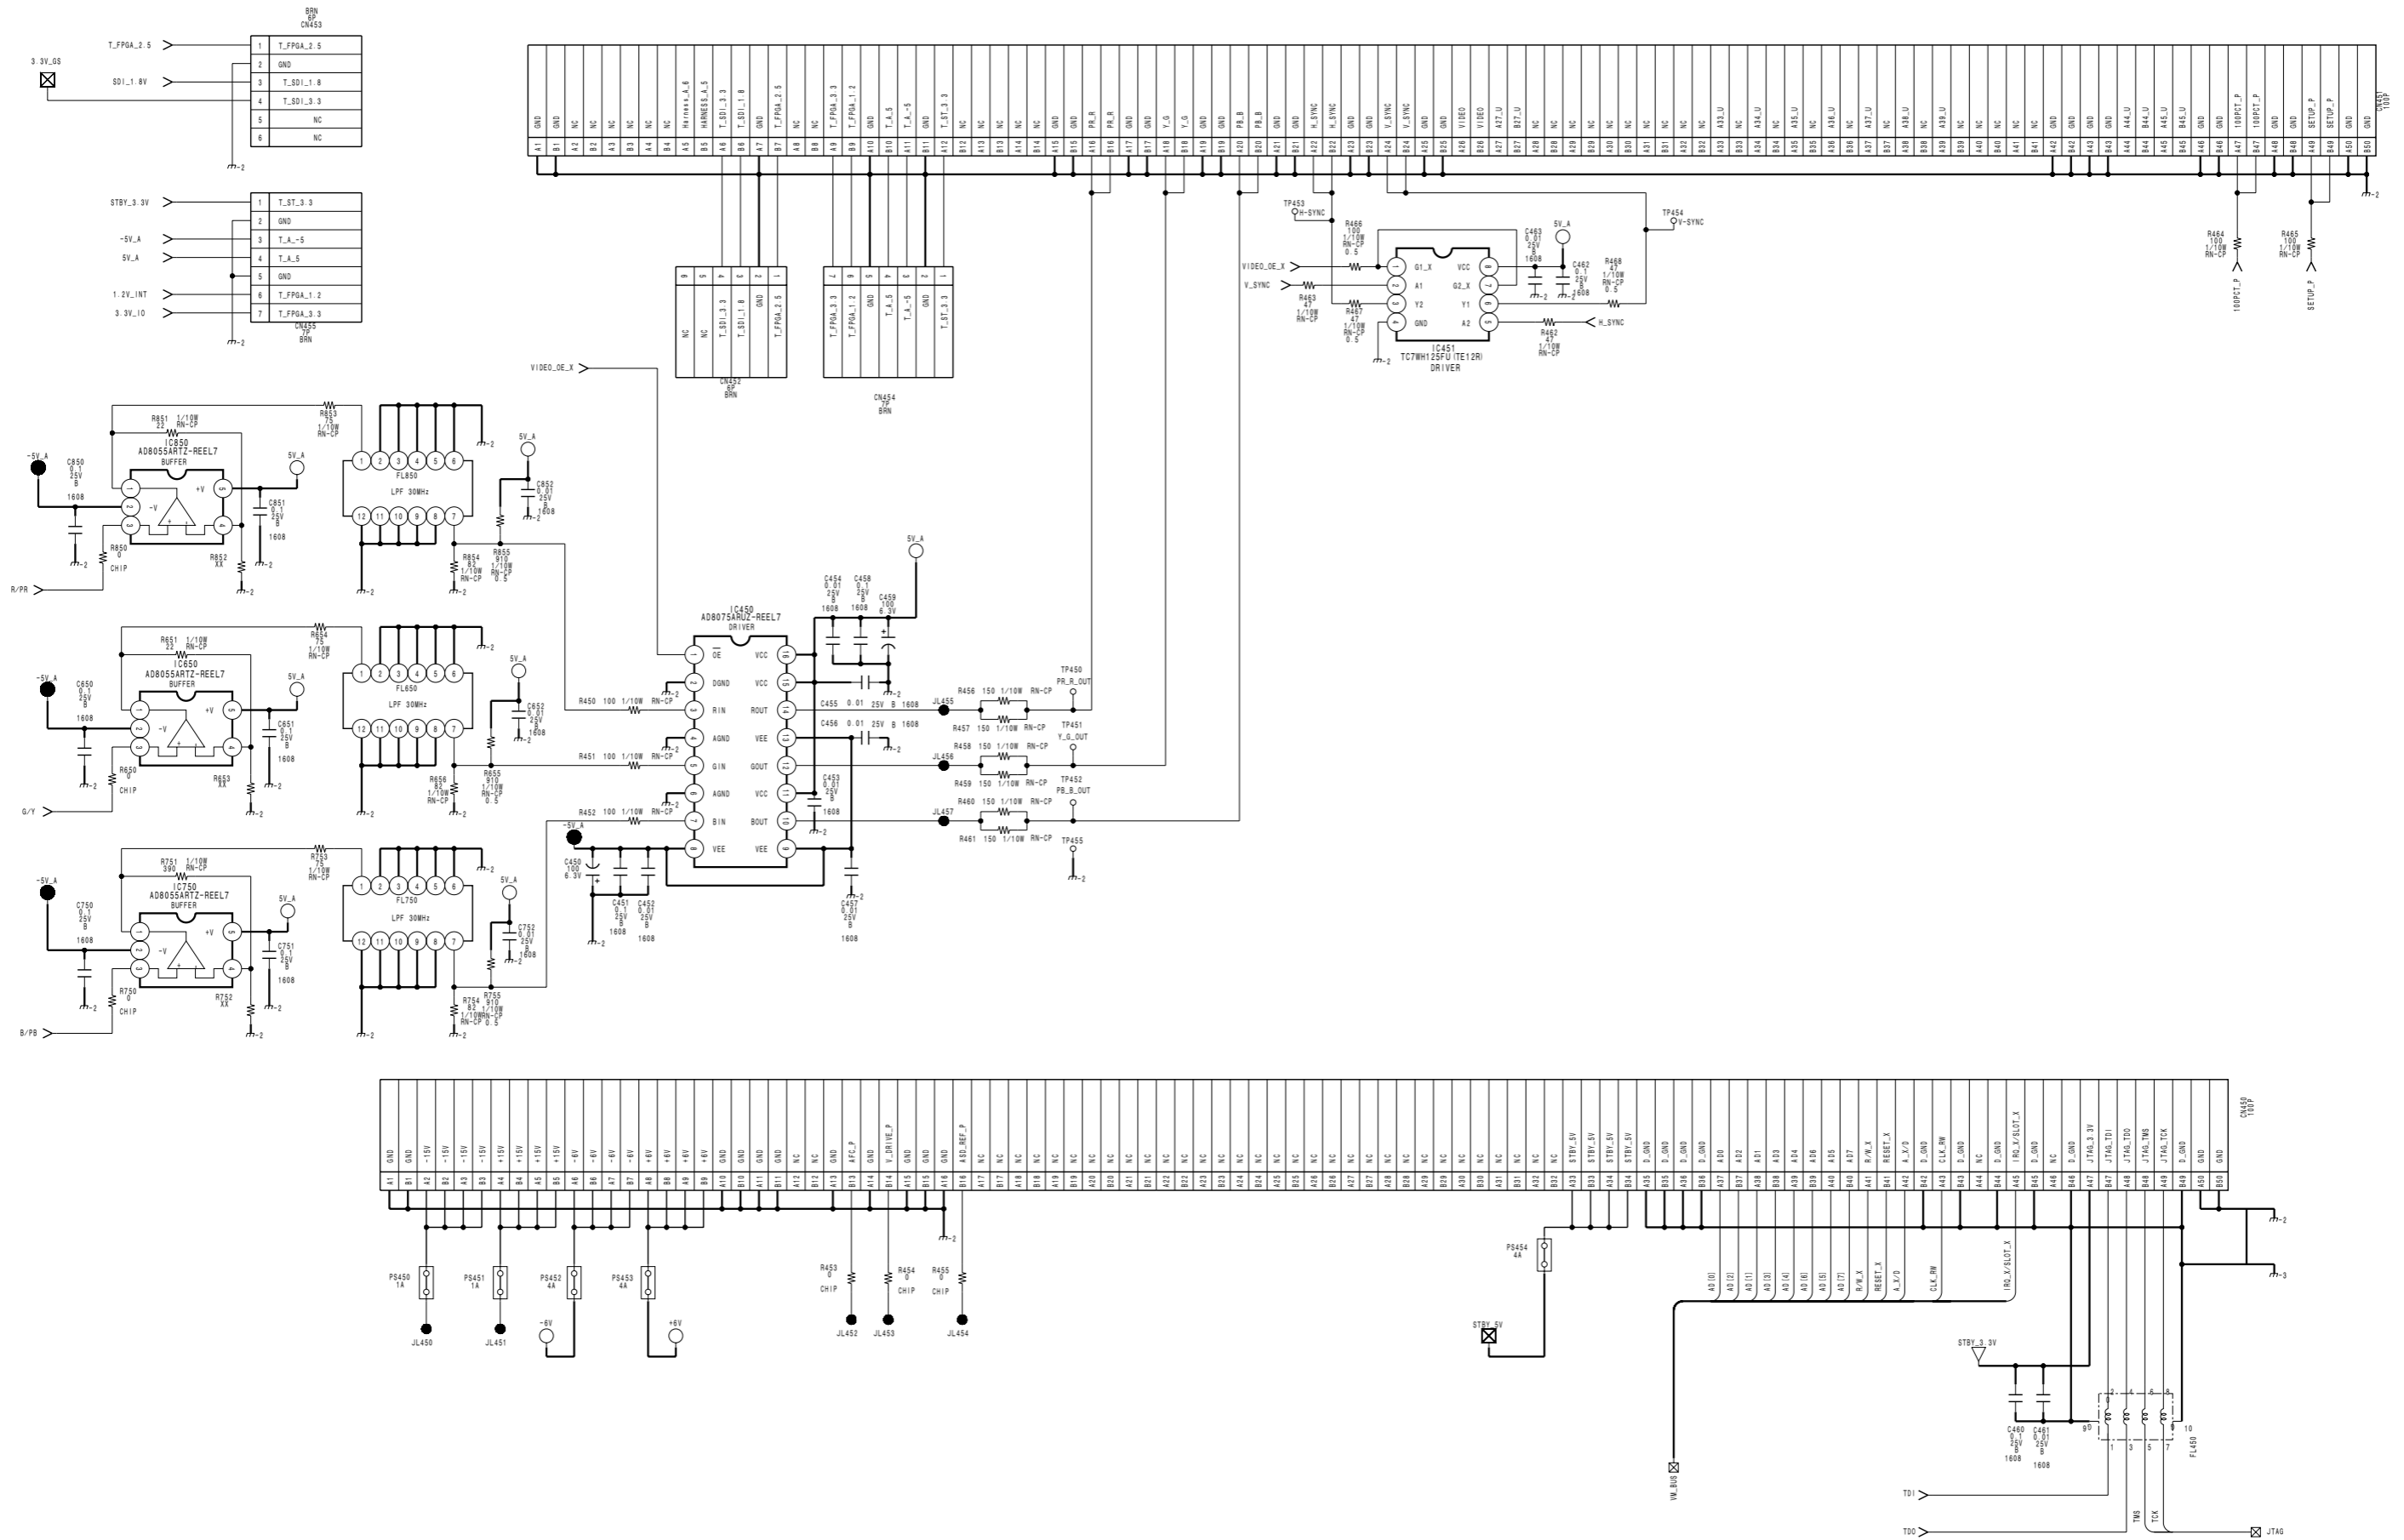

BX (1/8)(BKM-68X)

BX (1/8)(BKM-68X)

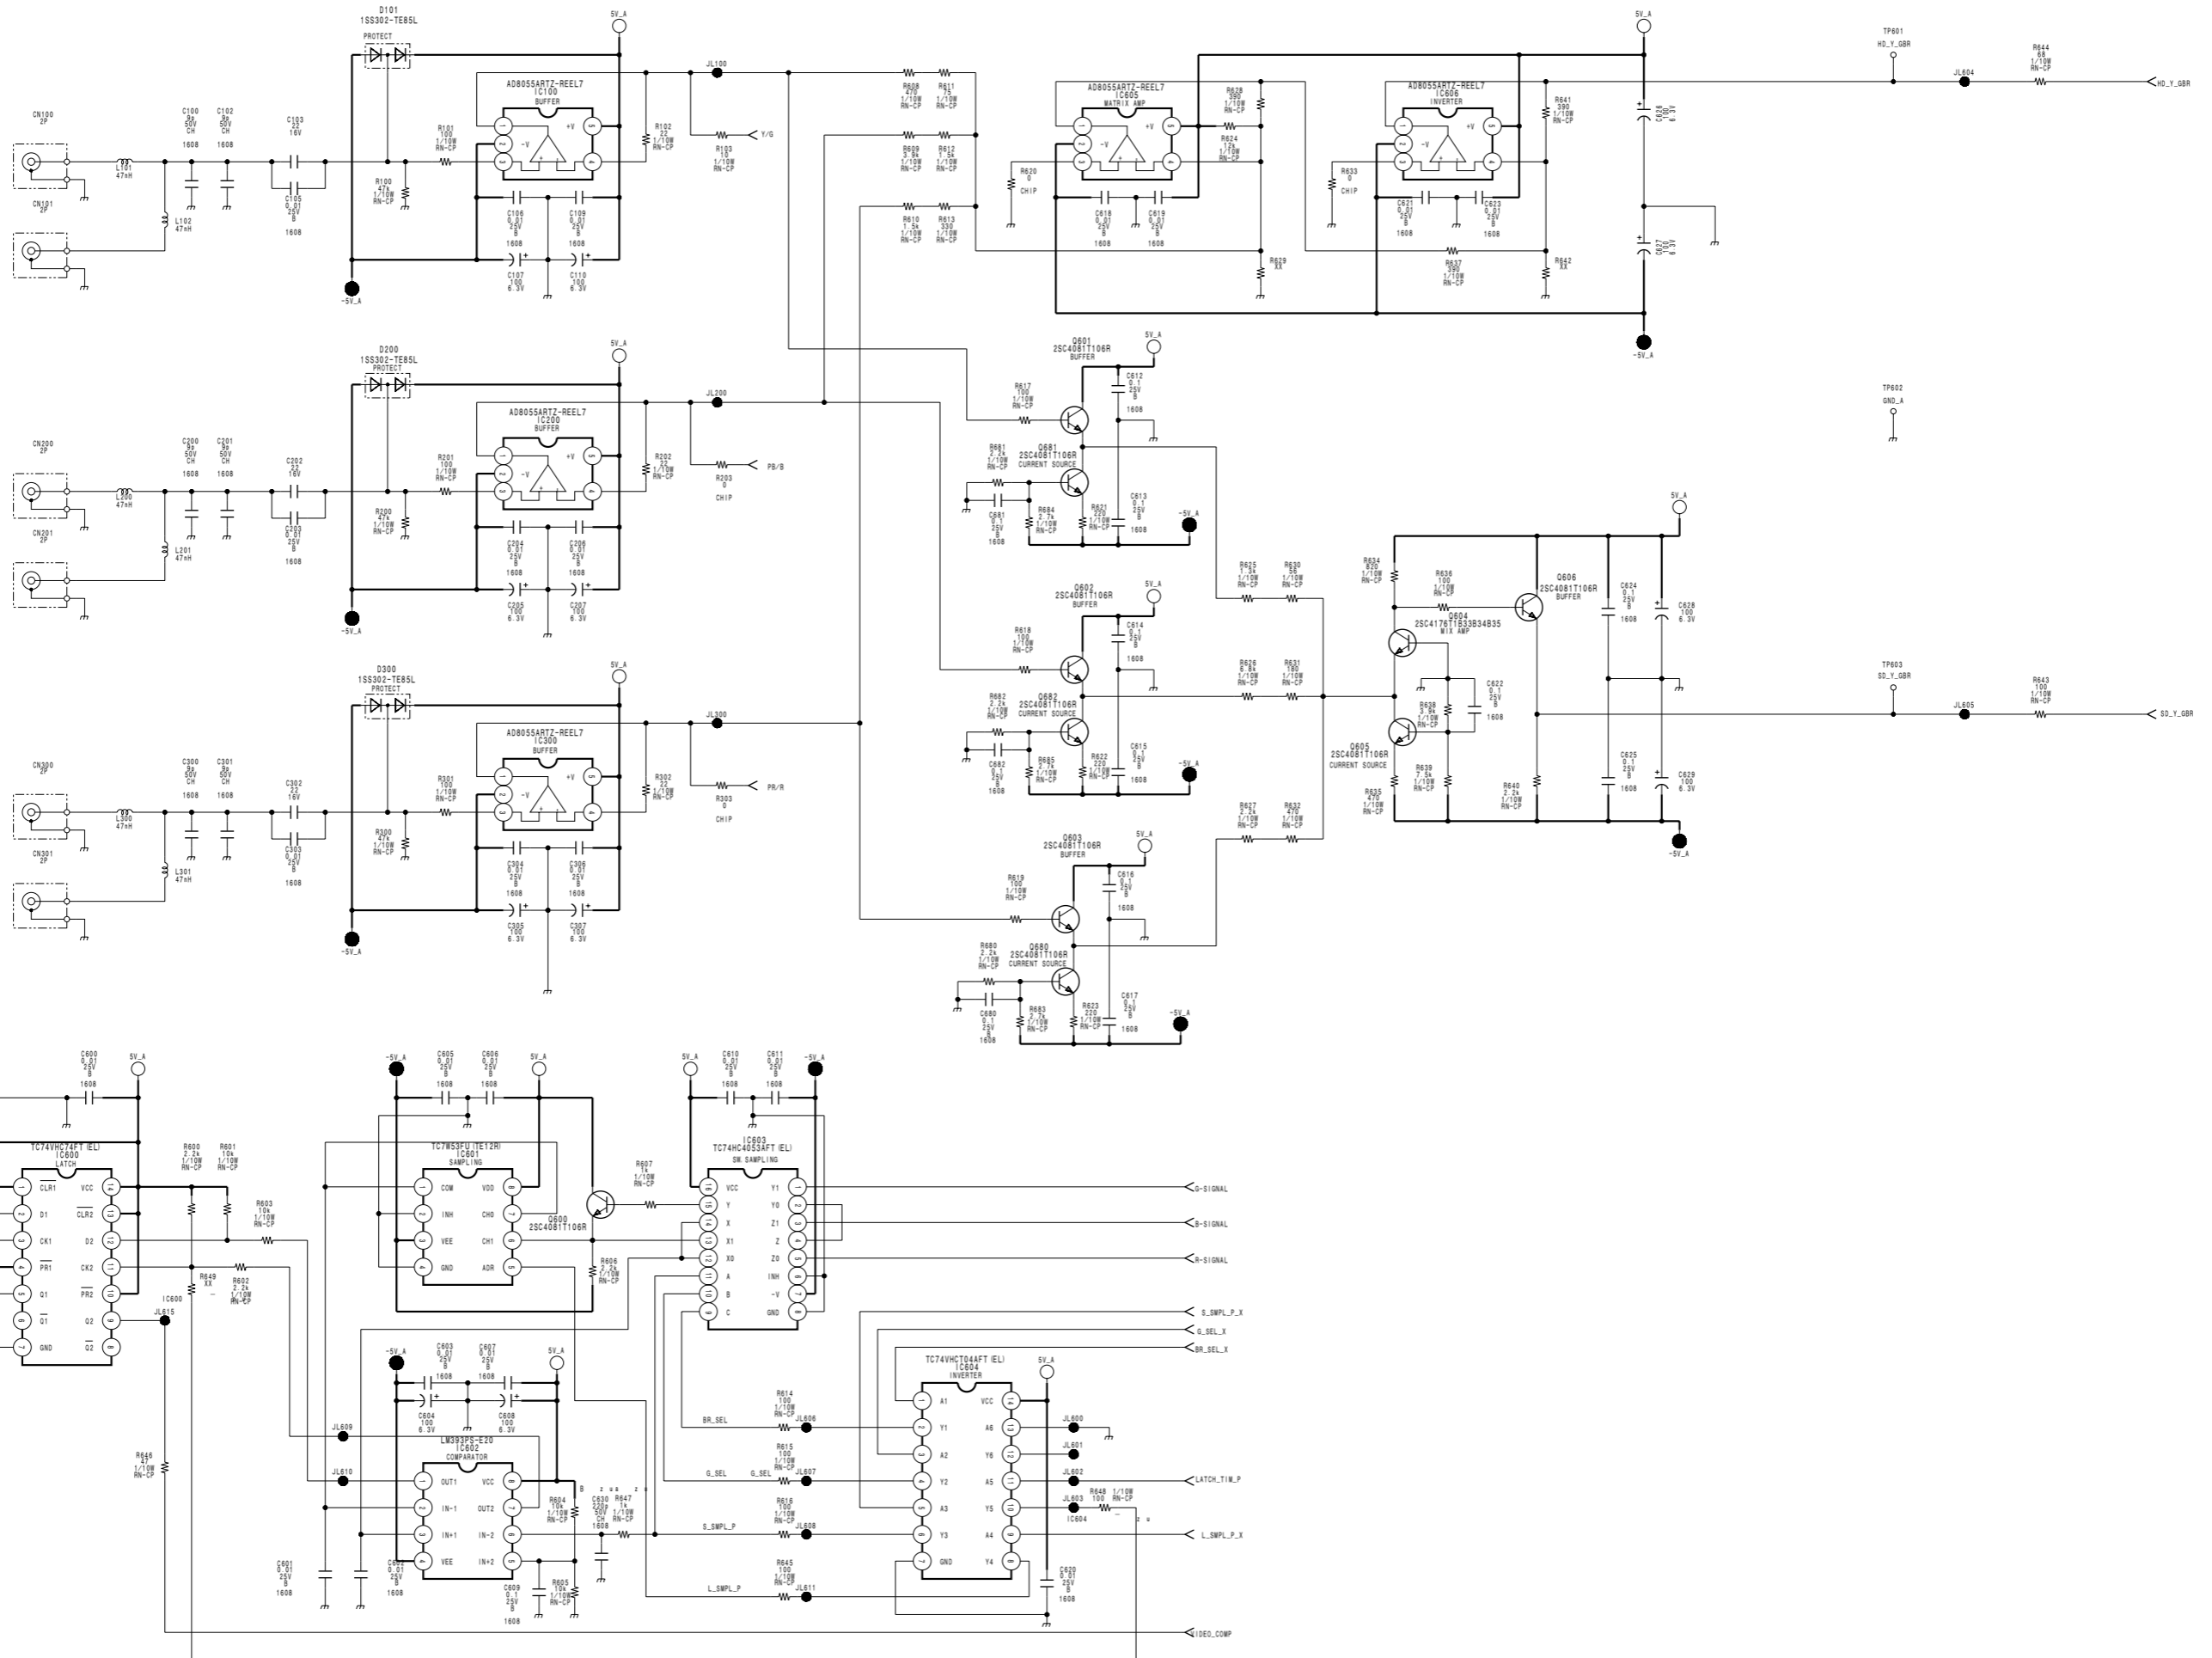


BX (2/8)(BKM-68X)







BX (3/8)(BKM-68X)

BX (3/8)(BKM-68X)

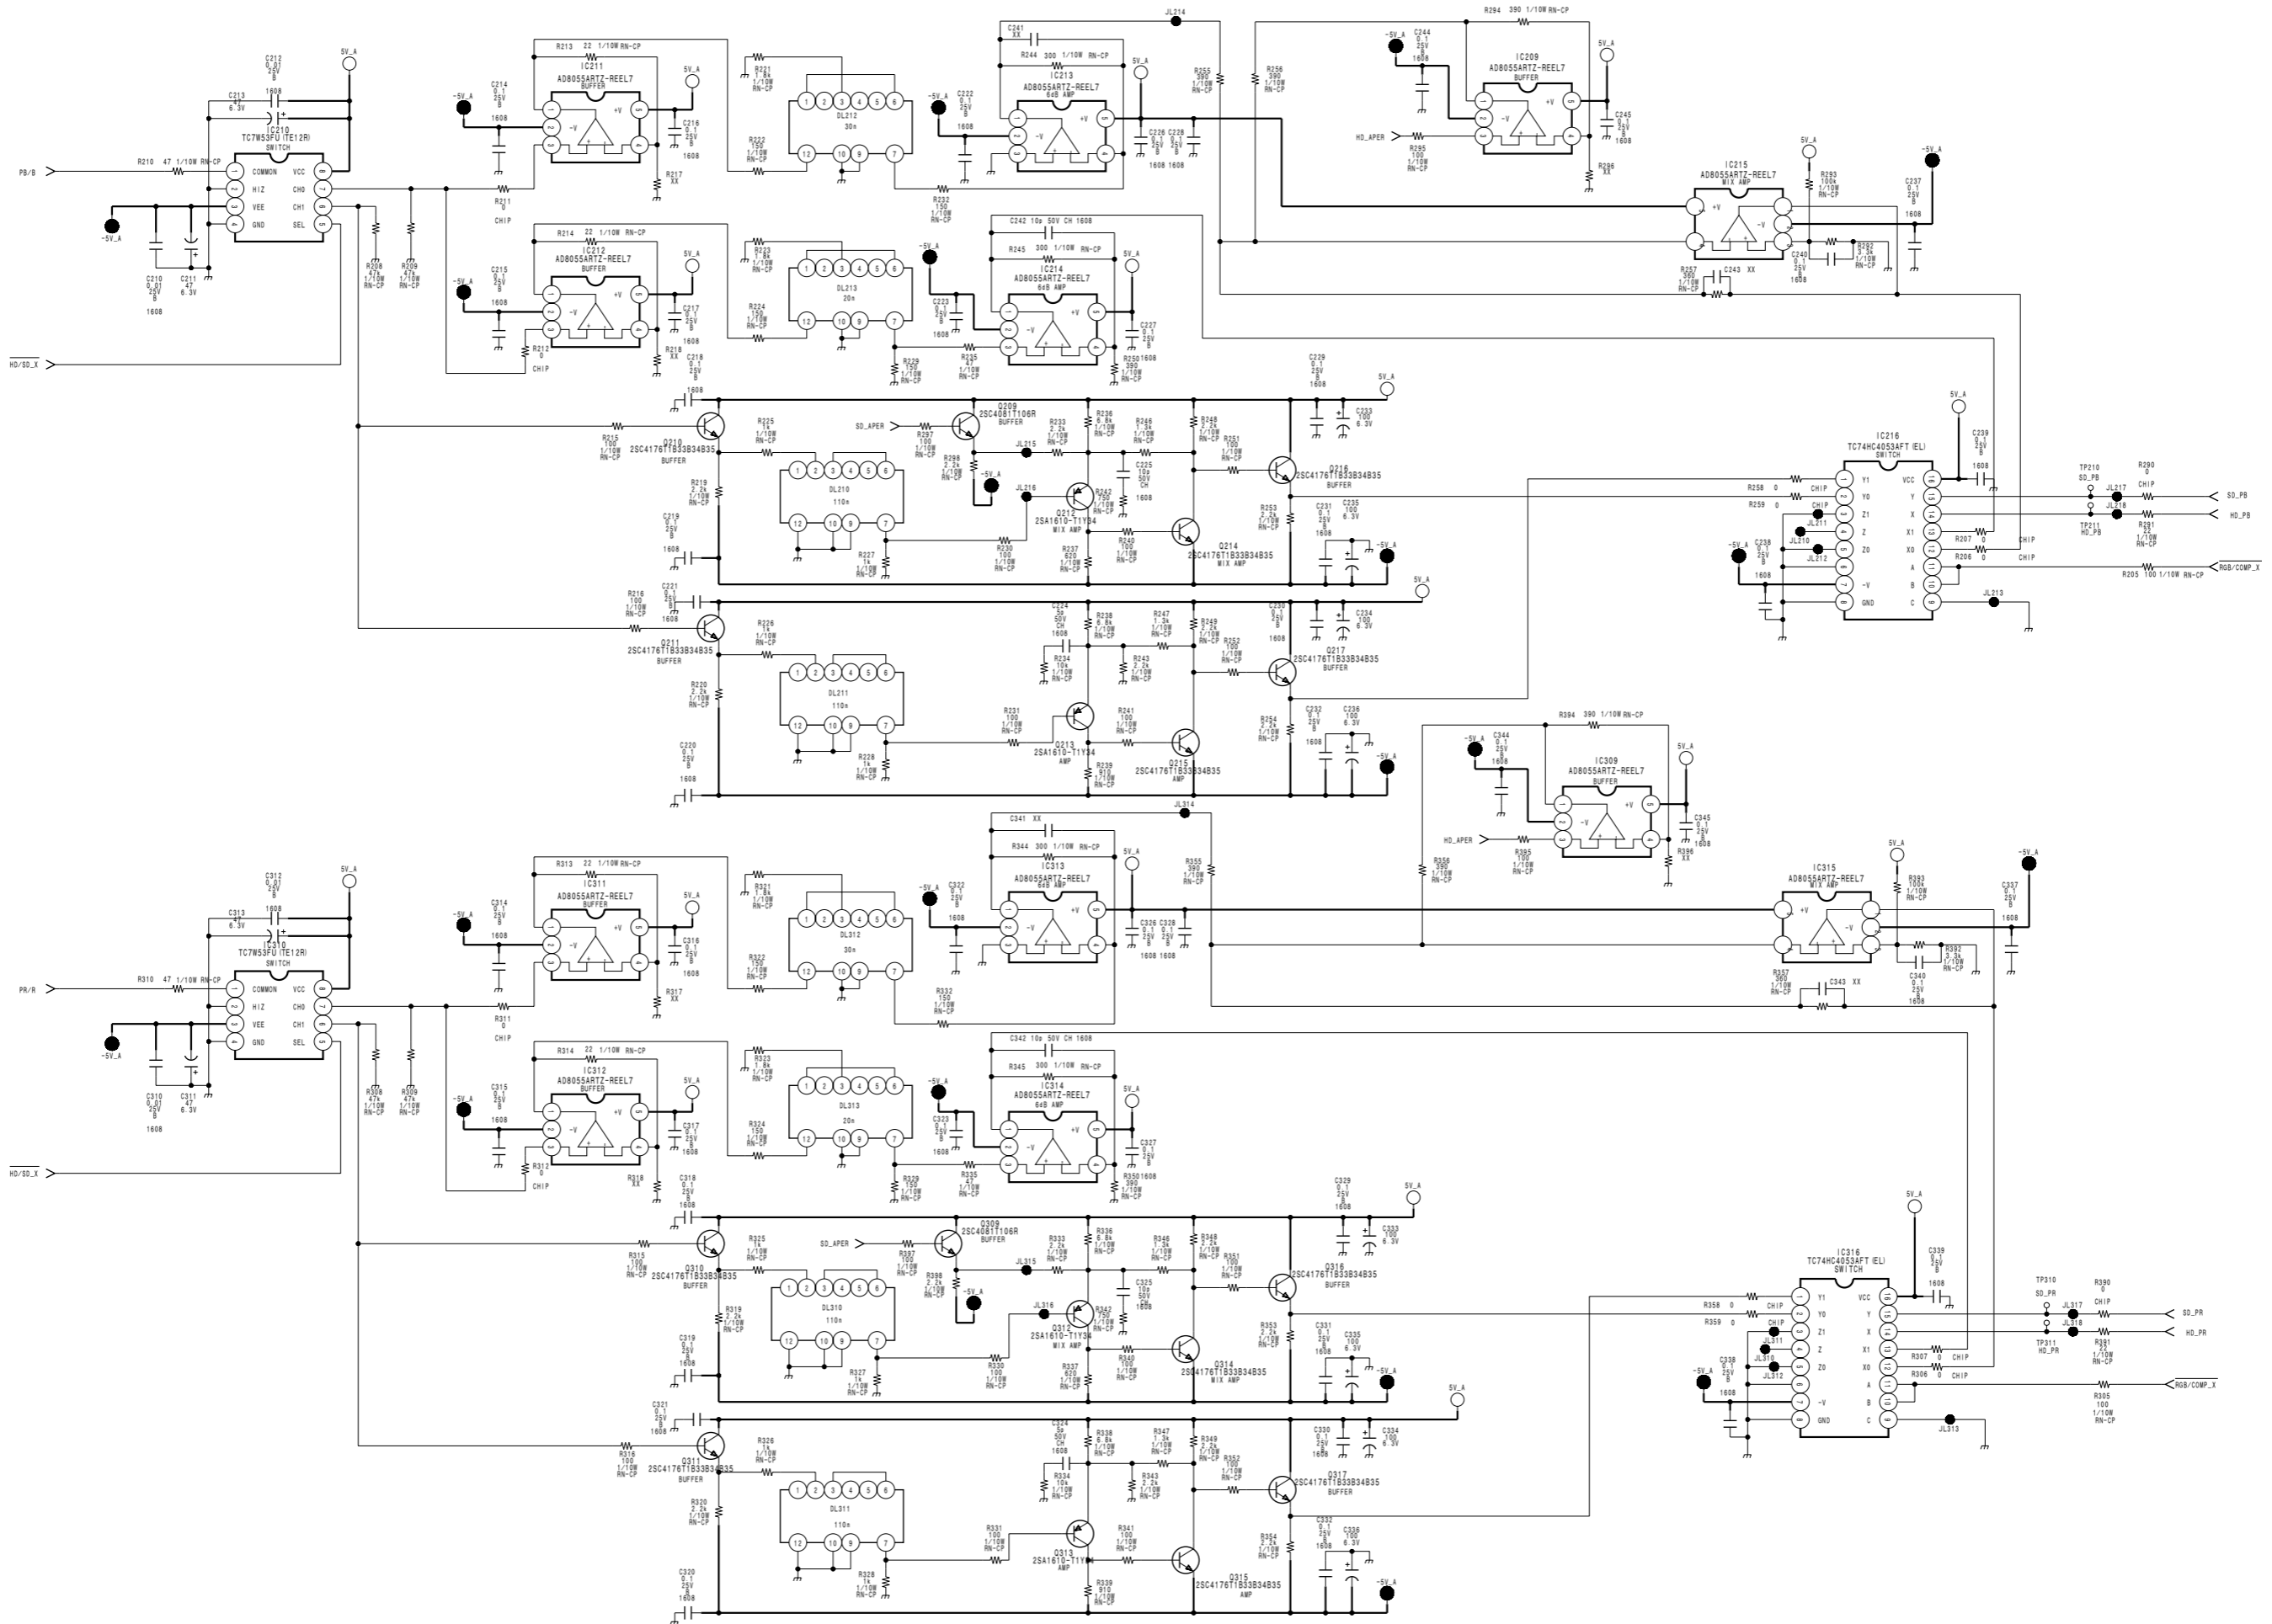


BX (4/8)(BKM-68X)


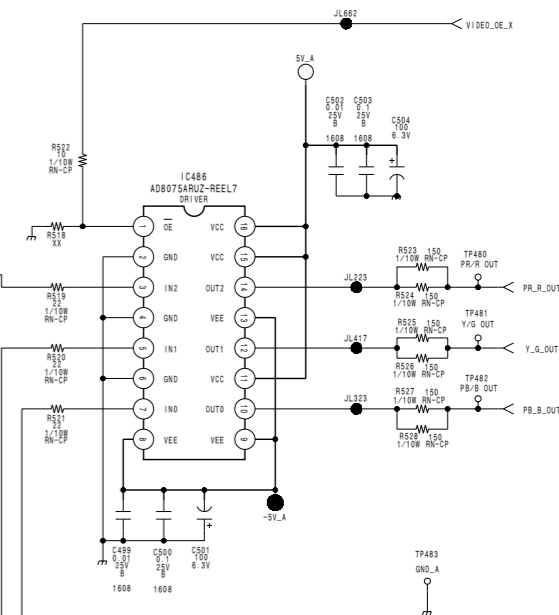


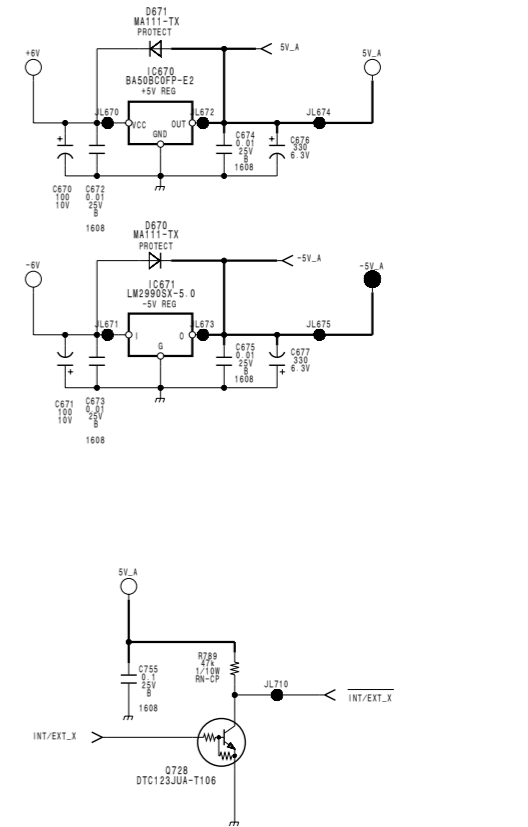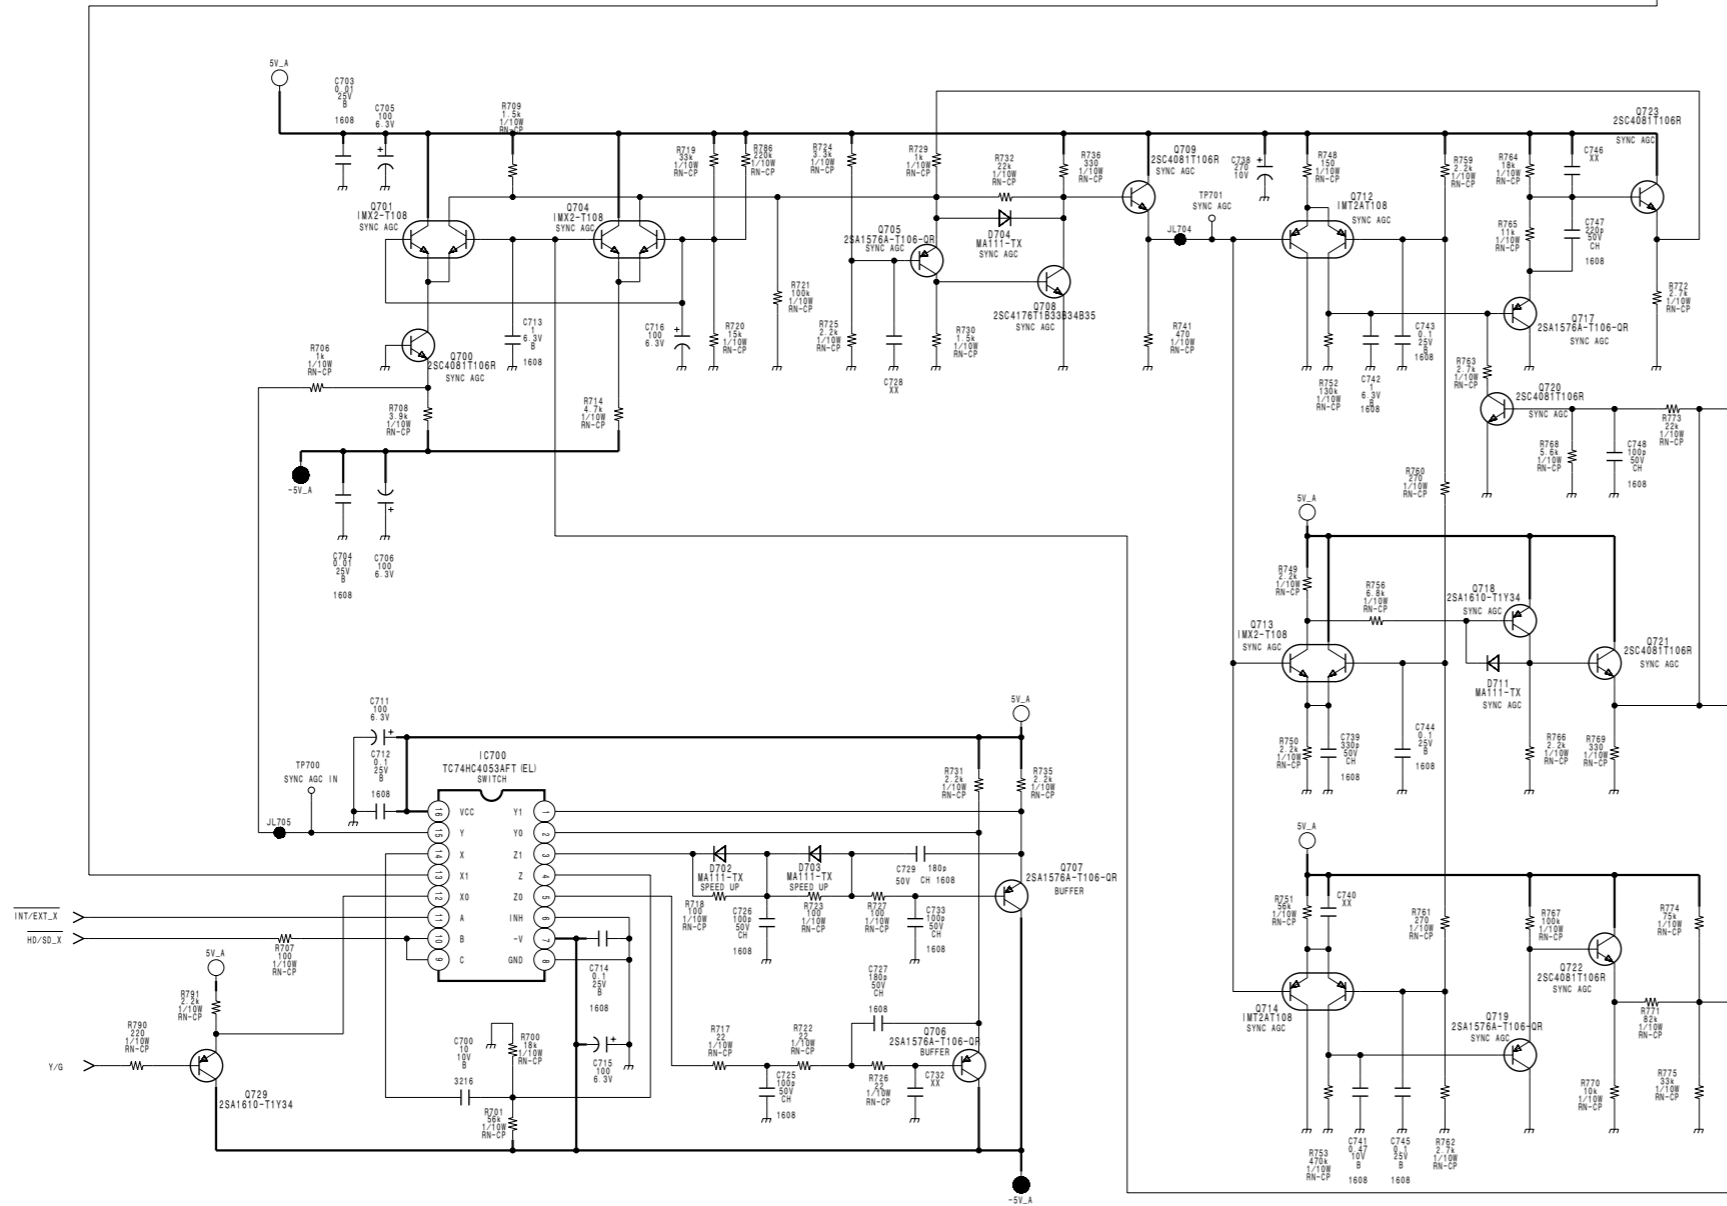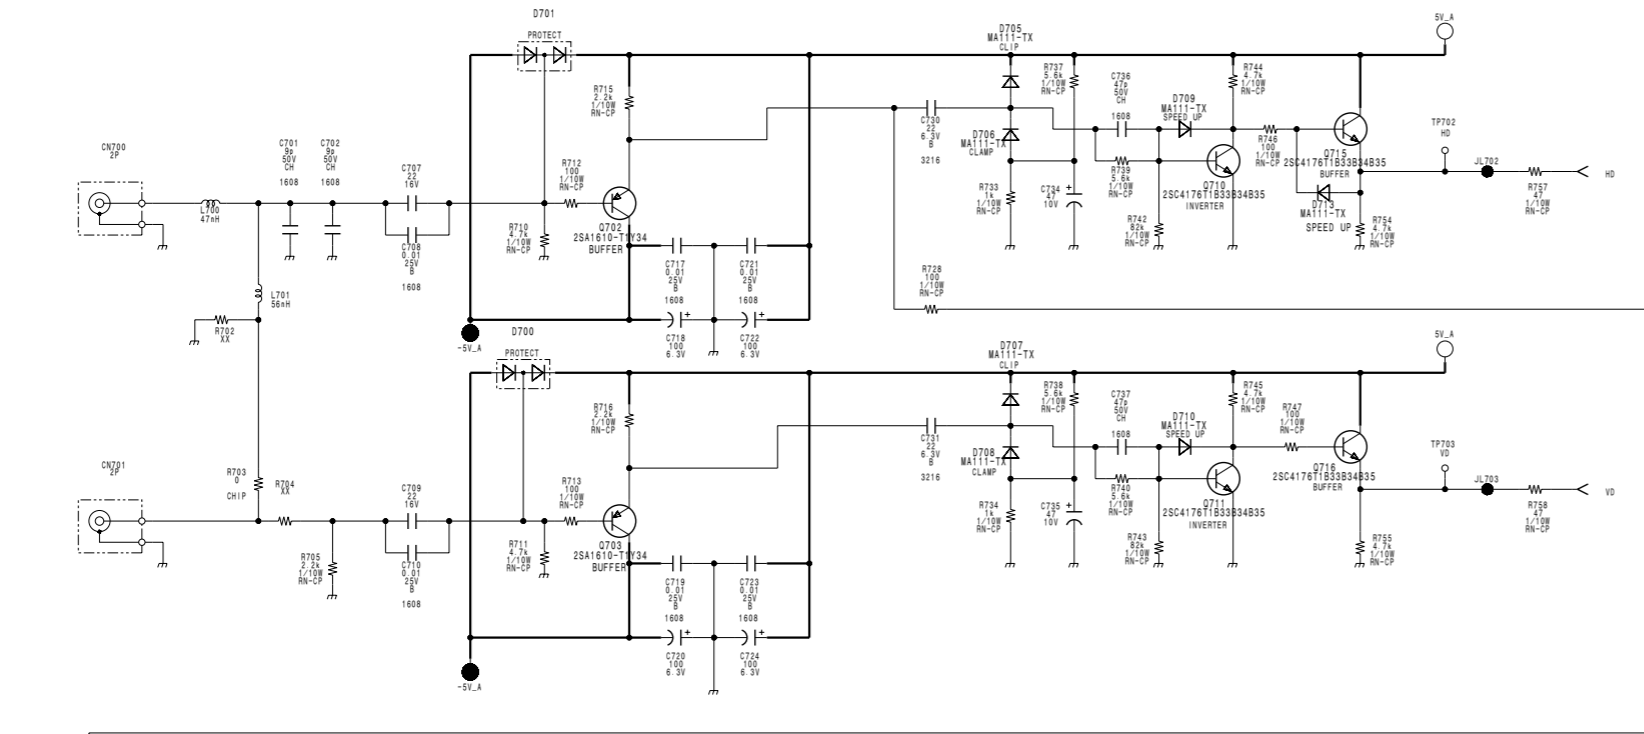

BX (6/8)(BKM-68X)

BX (7/8)(BKM-68X)



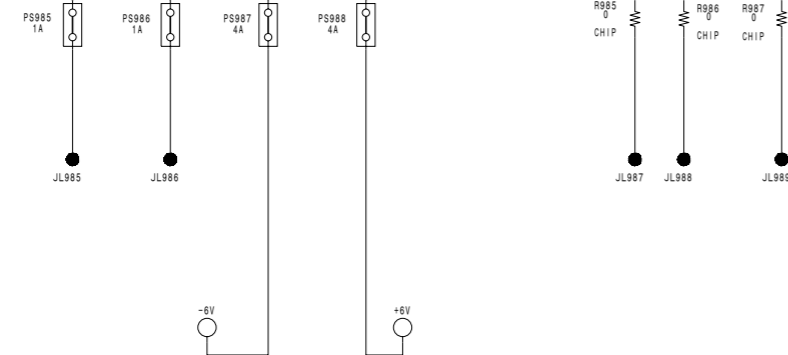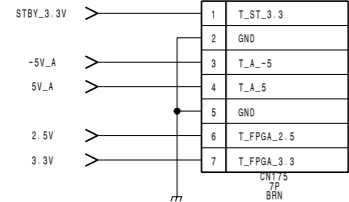


Section 7
Board Layouts


Board Name	Function	Page
BD	SDI/ANALOG MULTI INPUT ADAPTOR	7-2
BHS	HD SDI/SDI INPUT ADAPTOR	7-4
BX	ANALOG COMPONENT INPUT ADAPTOR	7-6

BD BOARD (BKM-61D)

*: B SIDE

D101	F-1	Q100	* H-1
D200	H-5	Q101	H-2
D240	A-5	Q102	* H-2
D241	A-7	Q103	H-2
D300	H-6	Q104	* F-1
D400	H-8	Q200	H-5
D520	D-4	Q201	H-4
D521	C-4	Q202	H-5
D522	C-4	Q203	H-5
D523	D-5	Q204	H-5
D524	B-5	Q205	G-5
D525	B-7	Q300	H-7
D526	F-9	Q301	H-6
D527	C-7	Q302	H-6
D528	B-7	Q303	H-7
D600	F-8	Q304	H-7
D601	D-8	Q340	D-3
D602	F-4	Q341	D-3
D603	D-9	Q342	D-3
D604	F-7	Q400	H-8
D900	B-9	Q401	H-7
D901	* B-7	Q402	H-8
		Q403	H-8
		Q404	H-8
		Q440	D-2
		Q441	D-2
		Q442	D-1
		Q500	G-4
		Q501	G-4
		Q502	G-4
		Q503	G-3
		Q504	G-4
		Q505	G-4
		Q506	G-4
		Q507	H-9
		Q520	D-4
		Q521	E-3
		Q522	B-5
		Q523	B-5
		Q524	B-5
		Q525	B-5
		Q526	D-5
		Q527	D-5
		Q528	C-5
		Q529	C-5
		Q530	C-7
		Q531	C-7
		Q532	C-7
		Q533	C-7
		Q534	C-4
		Q600	* F-5
		Q601	E-6
		Q602	F-4
		Q750	G-3
		Q751	H-3
		Q752	H-3
		TP100	G-2
		TP101	G-1
		TP102	H-2
		TP170	A-2
		TP171	A-2
		TP172	A-2
		TP173	A-3
		TP174	A-3
		TP175	A-3
		TP200	G-5
		TP300	H-7
		TP400	H-8
		TP500	H-7
		TP520	D-5
		TP600	E-6
		TP700	H-3
		TP901	B-9
		TP902	B-8
IC100	H-2		
IC101	* H-1		
IC102	H-1		
IC103	H-2		
IC104	F-1		
IC105	* H-1		
IC170	B-2		
IC171	B-3		
IC200	H-5		
IC201	H-5		
IC240	D-1		
IC241	B-7		
IC242	A-5		
IC243	C-3		
IC244	D-3		
IC245	D-1		
IC246	C-1		
IC247	D-2		
IC248	D-2		
IC300	H-6		
IC301	H-6		
IC340	D-3		
IC400	H-8		
IC401	H-8		
IC402	H-7		
IC440	D-2		
IC501	H-9		
IC520	E-4		
IC521	D-4		
IC522	E-4		
IC523	C-4		
IC524	E-1		
IC525	F-9		
IC600	G-8		
IC601	E-8		
IC602	E-7		
IC603	D-8		
IC604	E-8		
IC605	E-7		
IC606	D-9		
IC607	F-7		
IC608	E-7		
IC609	F-5		
IC611	F-7		
IC750	G-3		
IC751	H-3		
IC800	F-3		
IC900	C-7		
IC901	C-8		
IC902	B-7		
IC903	C-8		
IC904	C-8		
IC905	B-8		
IC906	B-8		
IC907	B-8		
IC908	B-9		
IC909	B-9		
IC910	C-8		
IC911	D-8		
IC912	B-9		
IC913	D-7		

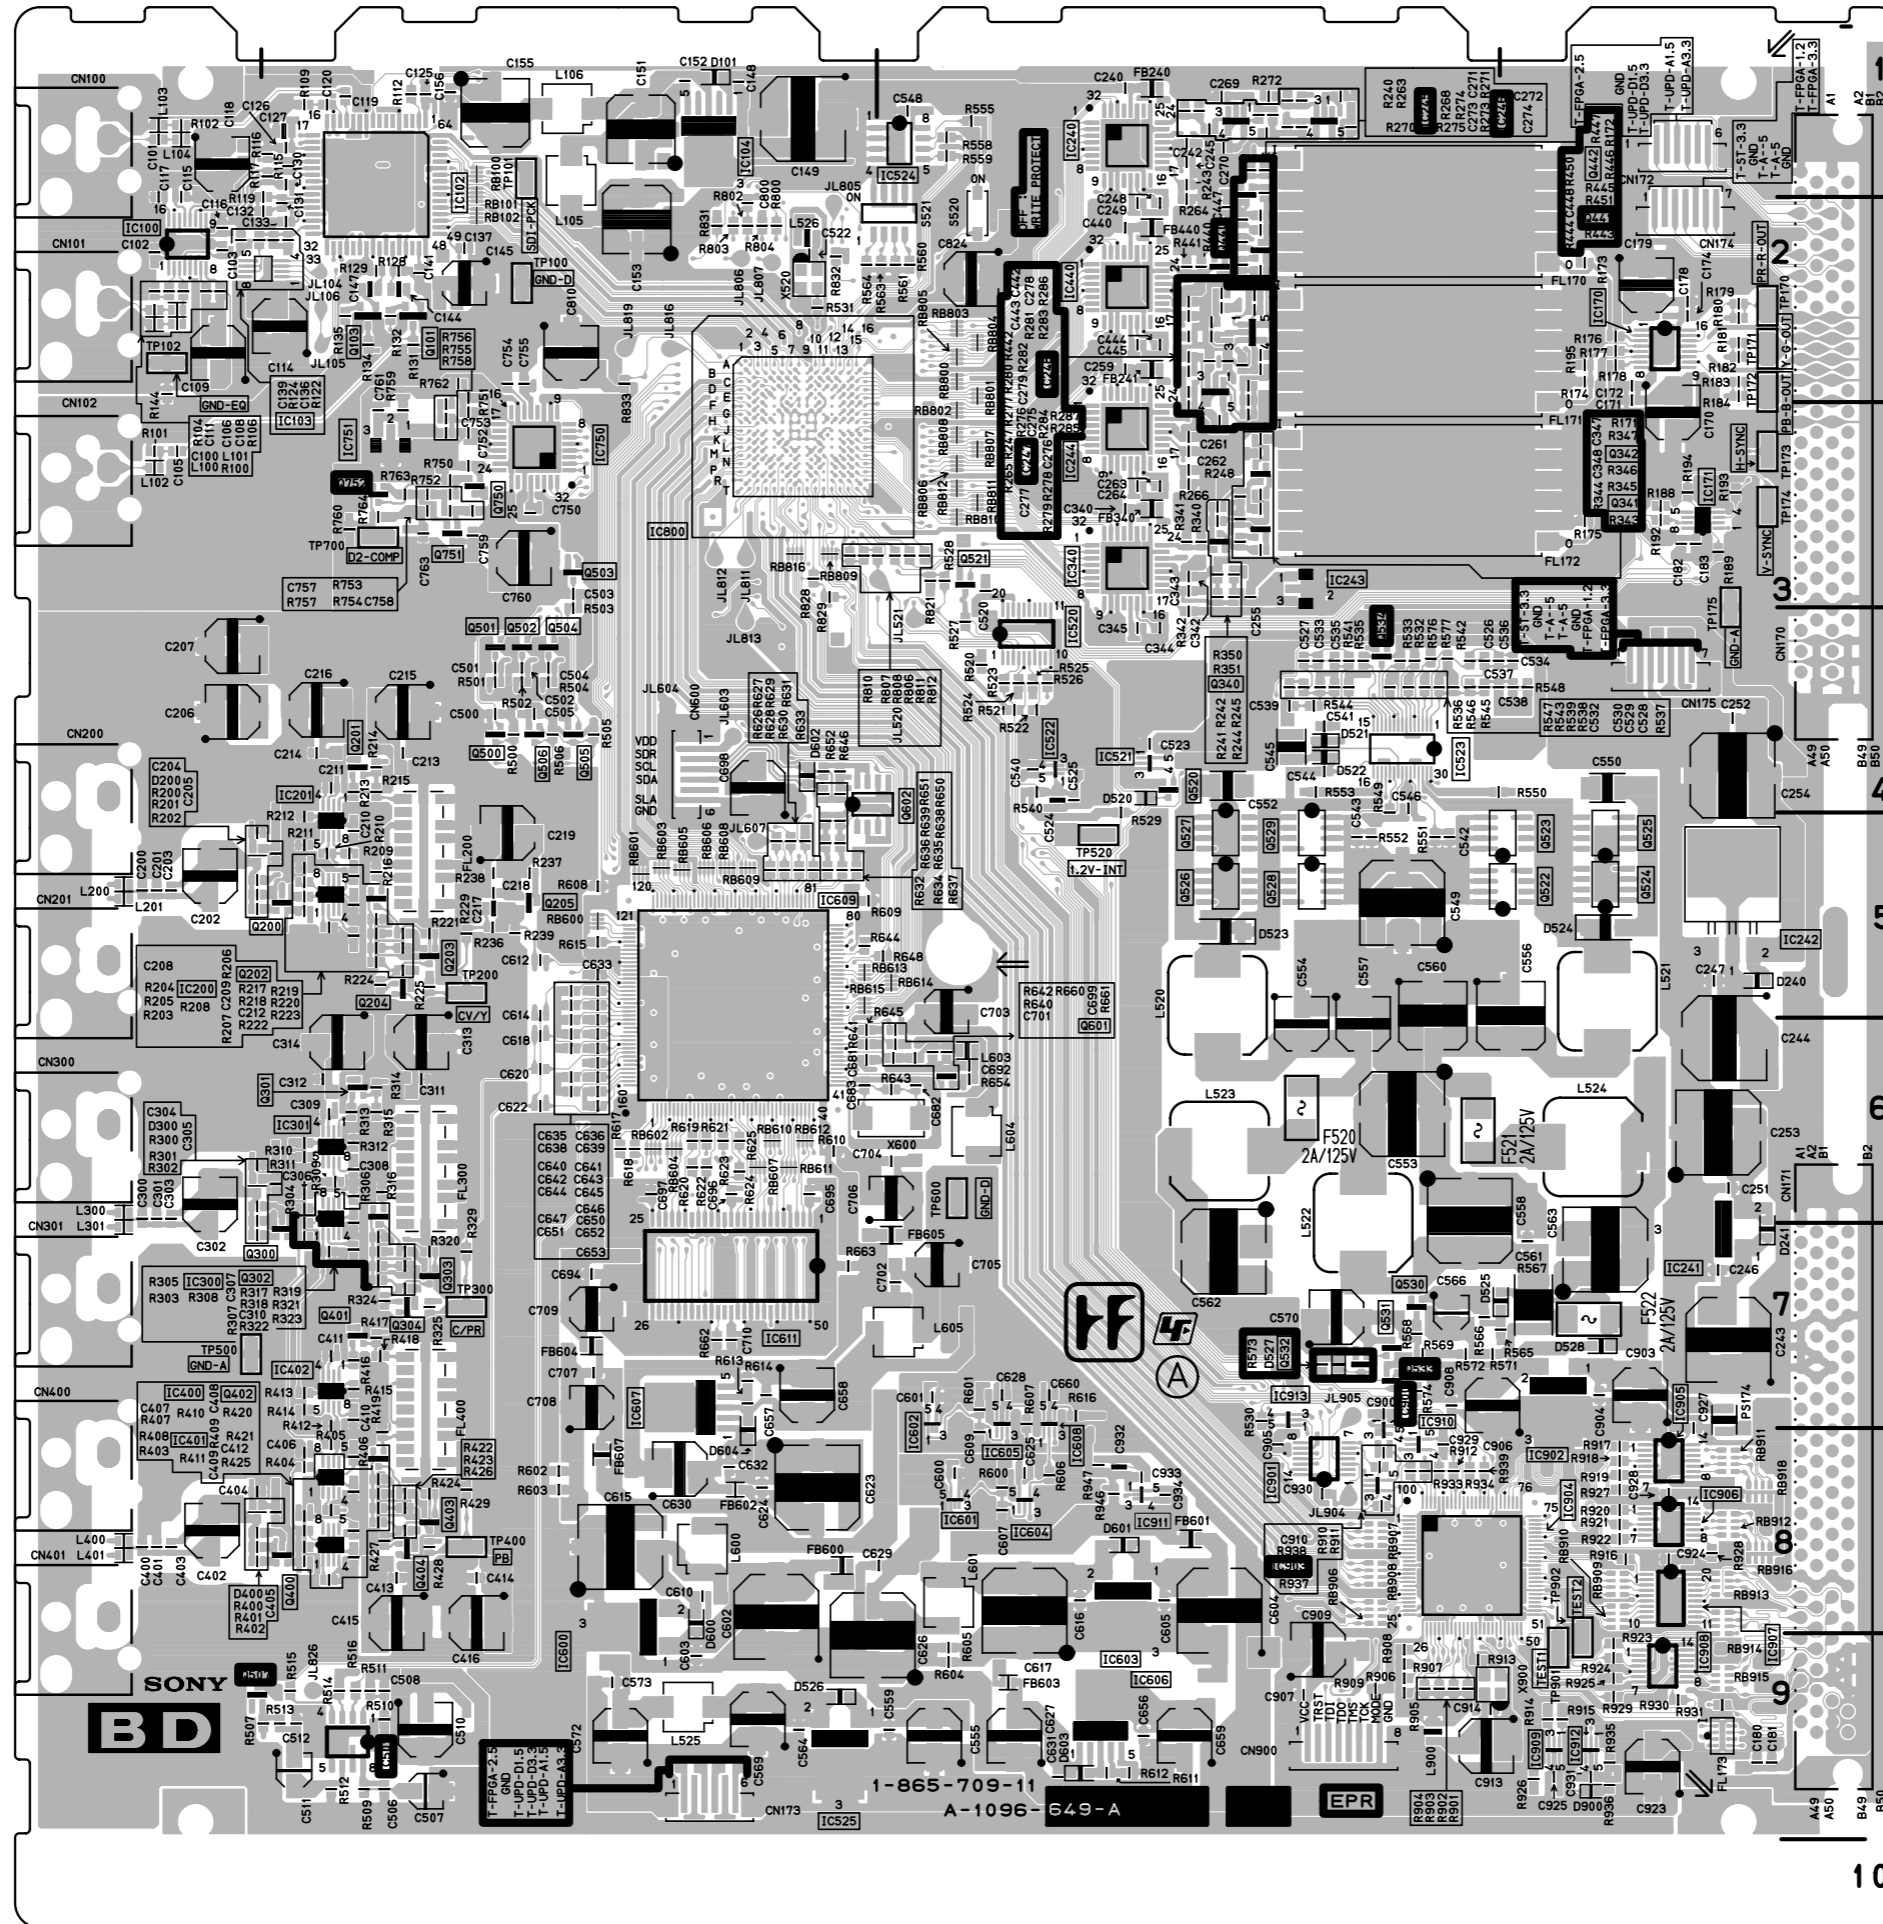

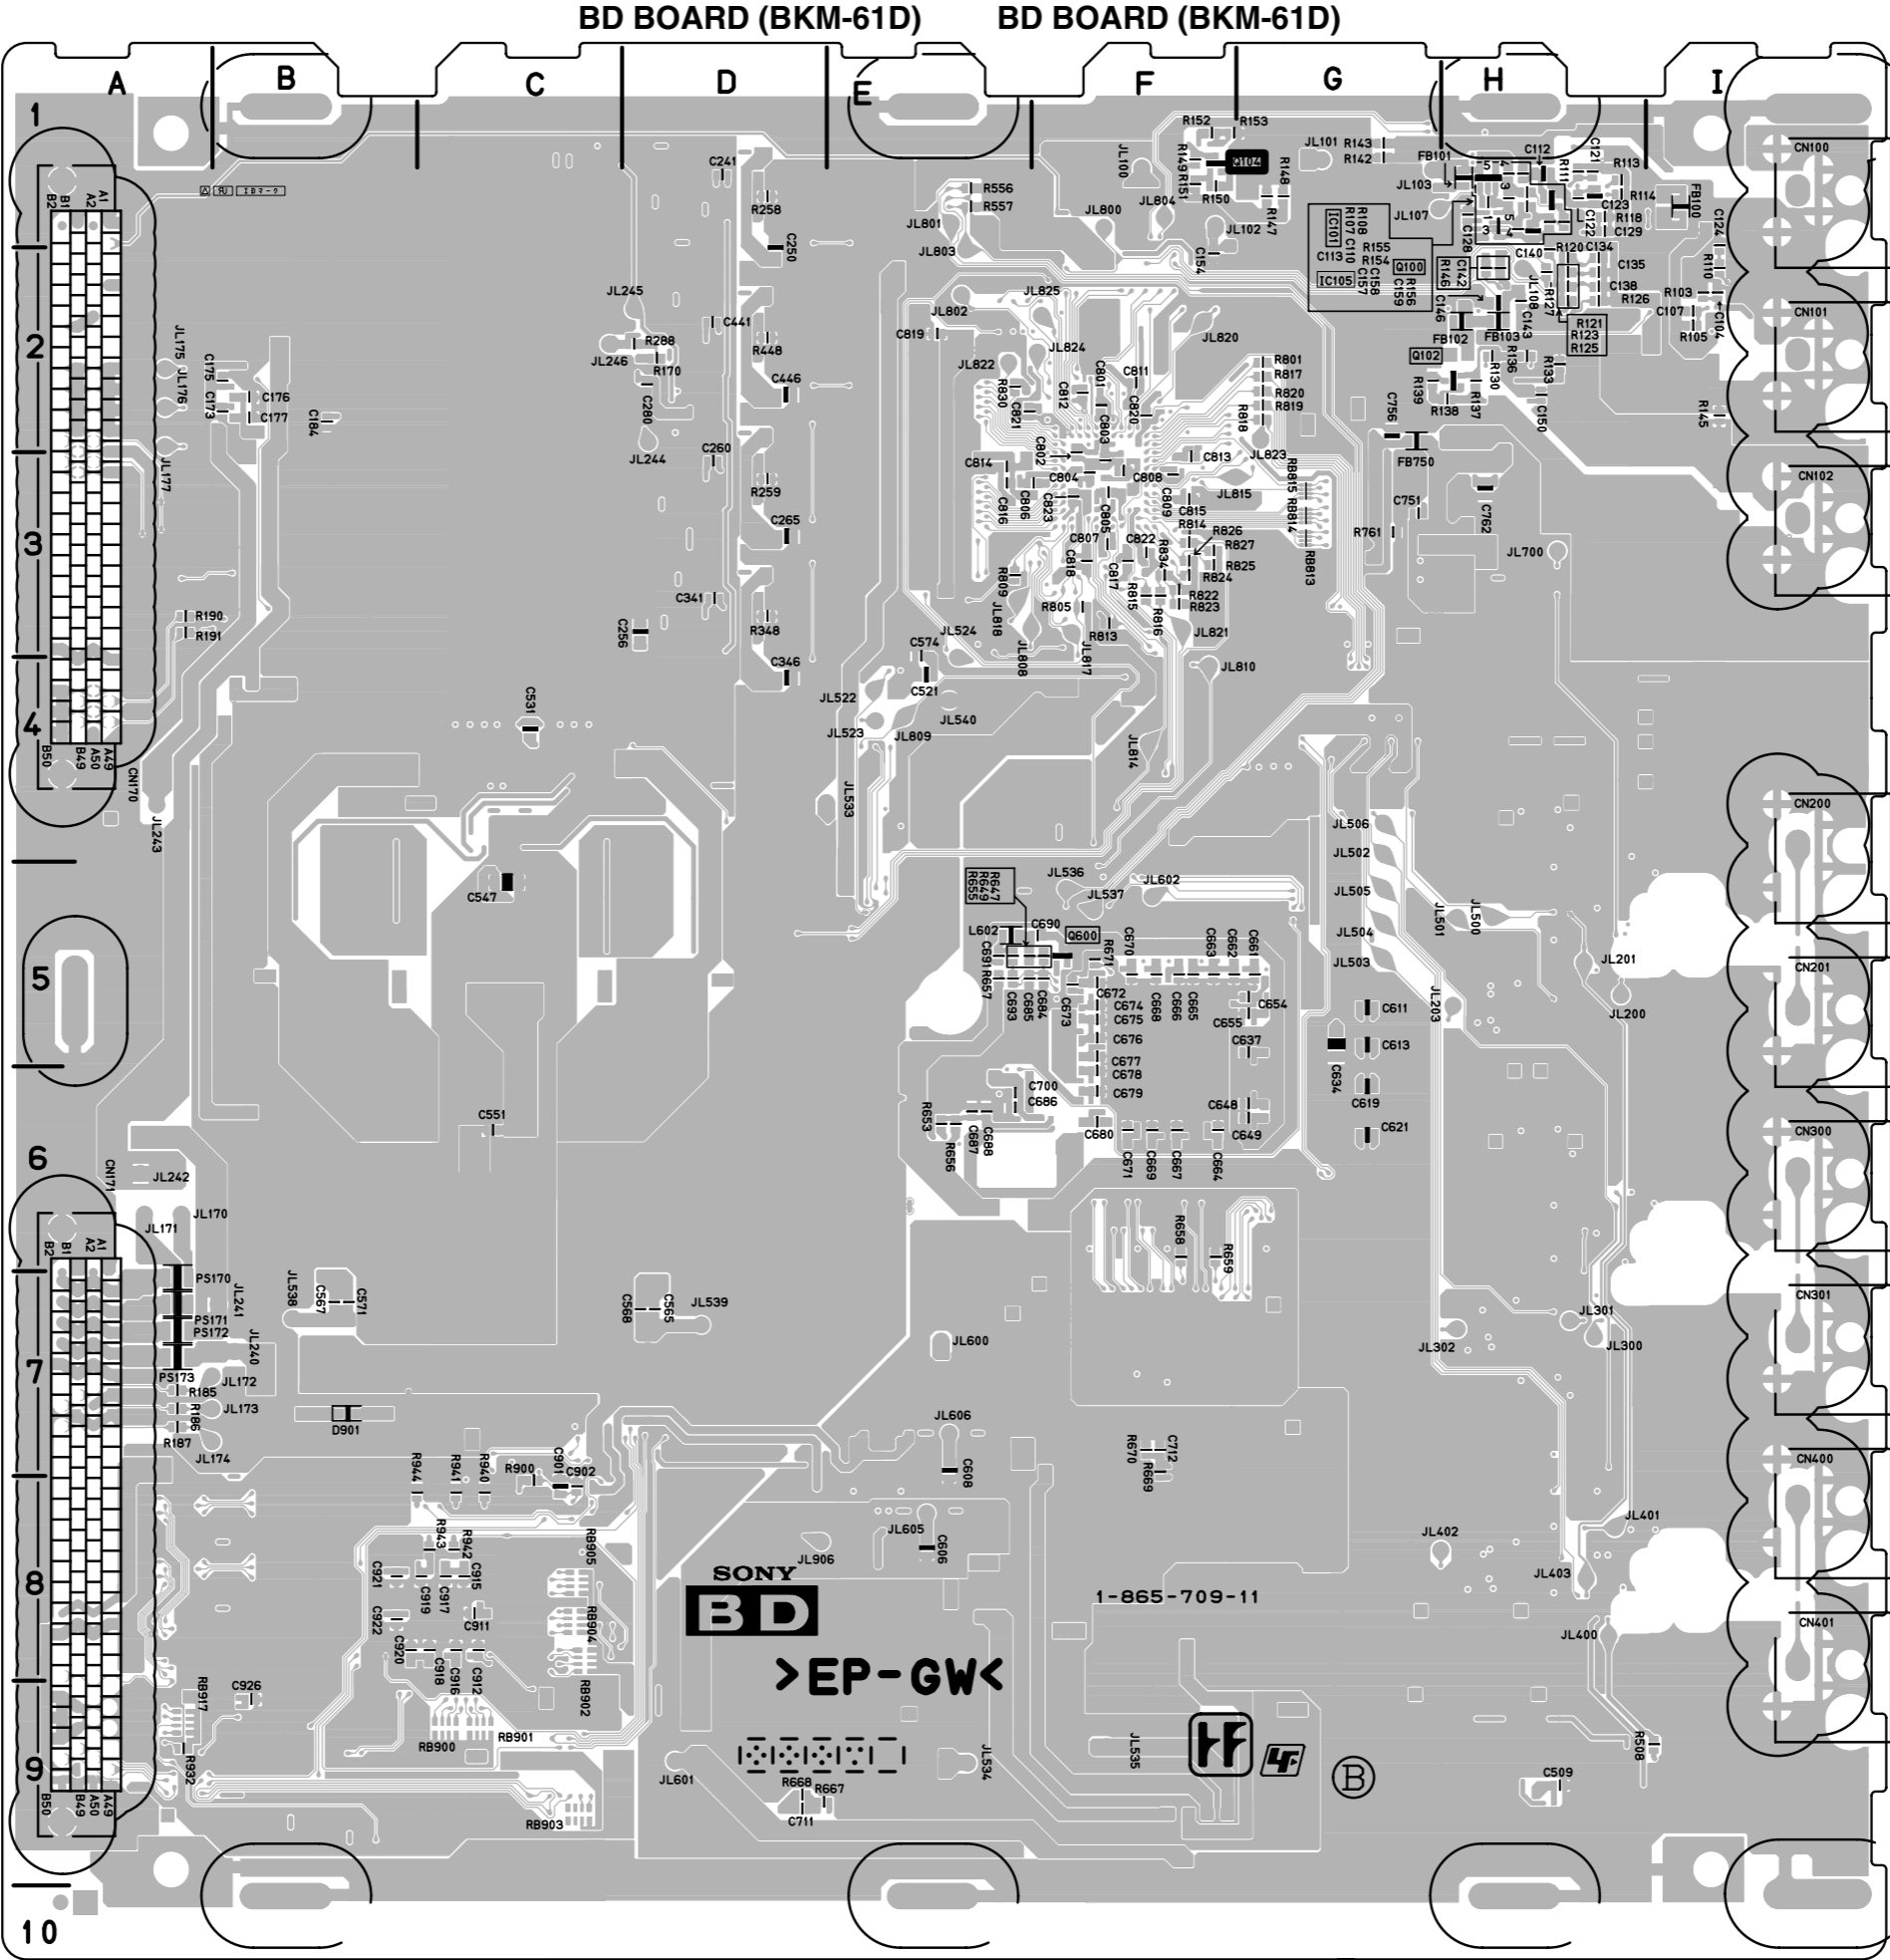


BD -B SIDE-
SUFFIX: -11


BHS BOARD (BKM-62HS)

*: B SIDE

D150	H-6	Q100	* H-2
D151	H-6	Q150	H-6
D152	H-7	Q152	H-6
D153	G-7	Q153	H-6
D154	G-9	Q154	G-7
D155	H-9	Q155	G-7
D156	G-9	Q156	G-7
D400	A-5	Q157	G-7
D401	A-7	Q158	H-7
D520	F-4	Q159	H-7
D521	C-4	Q160	H-7
D522	C-4	Q161	H-7
D523	D-5	Q162	H-9
D524	B-5	Q163	H-9
D525	C-7	Q164	H-9
D526	G-5	Q165	H-9
D527	D-7	Q200	* H-4
D528	B-7	Q400	D-1
D900	B-9	Q520	E-4
D901	B-7	Q521	F-4
		Q522	B-5
IC103	T-1	Q523	B-5
IC104	H-2	Q524	B-5
IC150	G-6	Q525	B-5
IC203	T-3	Q526	D-5
IC204	H-3	Q527	D-5
IC300	F-3	Q528	C-5
IC400	E-2	Q529	C-5
IC401	D-2	Q530	C-7
IC402	D-1	Q531	D-7
IC403	A-7	Q532	D-7
IC404	A-5	Q533	C-4
IC405	D-2	Q534	D-7
IC450	B-2		
IC451	A-3	TP150	G-9
IC520	F-4	TP450	A-2
IC521	E-4	TP451	A-2
IC522	E-5	TP452	A-2
IC523	C-4	TP453	A-3
IC524	F-2	TP454	A-3
IC525	G-5	TP455	A-3
IC526	E-5	TP520	B-7
IC527	E-5	TP901	B-9
IC600	E-3	TP902	B-9
IC601	D-3		
IC602	D-2		
IC603	D-2		
IC650	C-2		
IC700	E-4		
IC701	D-4		
IC702	D-3		
IC703	D-3		
IC704	D-3		
IC750	C-3		
IC800	E-3		
IC801	D-3		
IC802	D-2		
IC803	D-1		
IC804	D-1		
IC850	C-1		
IC900	C-7		
IC901	C-7		
IC902	B-7		
IC903	C-8		
IC904	C-8		
IC905	B-8		
IC906	B-8		
IC907	B-8		
IC908	B-9		
IC909	B-9		
IC910	C-7		
IC912	B-9		
IC913	C-8		

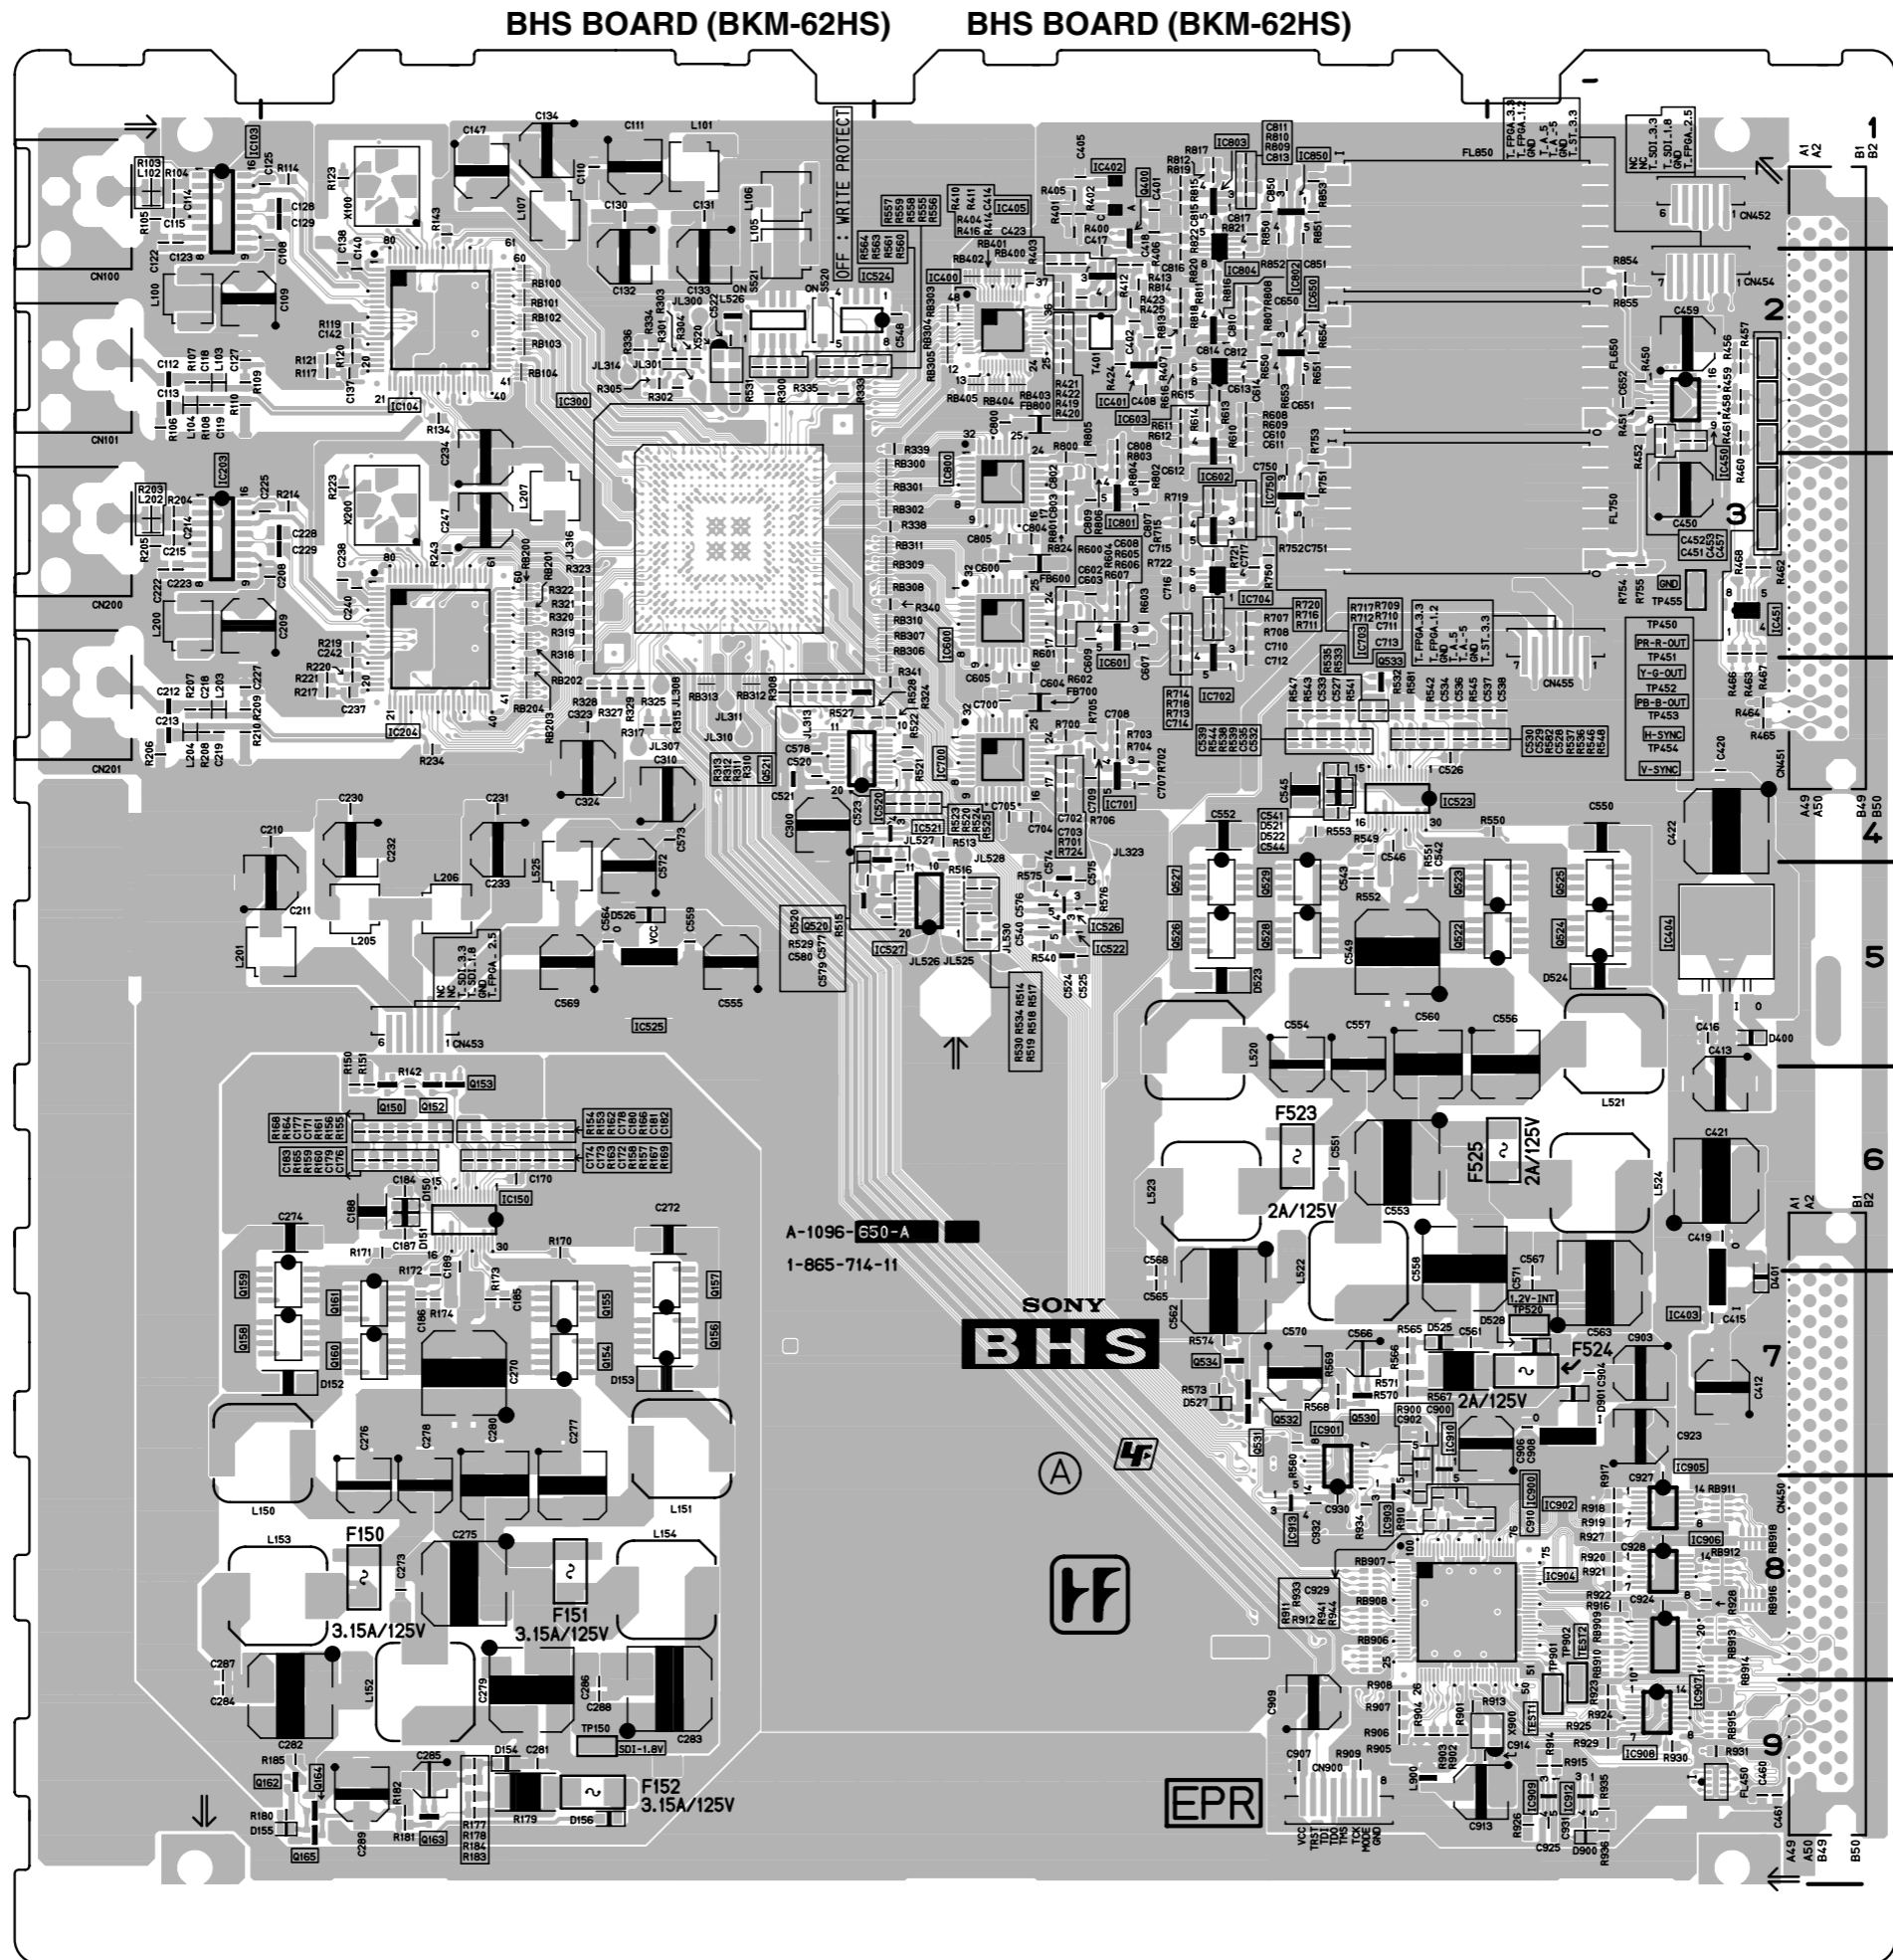


BHS BOARD (BKM-62HS)




BX BOARD (BKM-68X)

*: B SIDE

D101	I-1	IC904	C-8	Q803	F-9
D200	I-3	IC905	B-8	Q804	G-7
D300	I-5	IC906	B-8		
D670	B-6	IC907	B-8	TP210	E-4
D671	B-6	IC908	B-9	TP211	E-4
D700	H-7	IC909	B-9	TP310	E-5
D701	H-6	IC910	C-7	TP311	E-5
D702	G-7	IC911	C-7	TP400	D-3
D703	G-7	IC912	B-9	TP401	F-1
D704	H-8	IC950	* B-2	TP402	F-6
D705	H-6			TP480	A-2
D706	H-6	Q209	* H-4	TP481	A-2
D707	H-7	Q210	H-4	TP482	A-2
D708	H-7	Q211	H-4	TP483	B-3
D709	H-6	Q212	G-4	TP484	A-3
D710	H-7	Q213	G-5	TP485	A-3
D711	H-8	Q214	G-4	TP601	D-4
D712	H-9	Q215	G-4	TP602	E-1
D713	* H-6	Q216	F-4	TP603	D-3
D800	F-9	Q217	F-5	TP700	H-6
D801	D-6	Q260	B-3	TP701	H-8
D802	E-6	Q261	B-2	TP702	H-6
D900	B-9	Q309	* G-6	TP703	H-6
D901	B-7	Q310	H-6	TP704	H-9
		Q311	H-6	TP705	H-9
IC100	I-2	Q312	G-6	TP706	H-9
IC200	I-3	Q313	G-6	TP800	E-9
IC209	* H-3	Q314	G-6	TP901	B-9
IC210	H-3	Q315	G-6	TP902	B-9
IC211	H-3	Q316	F-6	TP903	C-8
IC212	H-4	Q317	F-6		
IC213	G-3	Q360	B-2		
IC214	G-4	Q361	B-2		
IC215	F-3	Q400	H-3		
IC216	F-4	Q401	H-2		
IC260	D-3	Q402	G-3		
IC261	D-3	Q403	G-2		
IC262	C-3	Q404	G-1		
IC263	C-3	Q405	G-3		
IC264	C-3	Q406	E-3		
IC265	B-3	Q407	G-3		
IC300	I-5	Q408	G-1		
IC309	* F-5	Q409	E-3		
IC310	H-5	Q410	E-3		
IC311	H-5	Q411	G-3		
IC312	H-5	Q412	E-3		
IC313	G-5	Q413	F-1		
IC314	G-5	Q414	F-1		
IC315	F-5	Q415	F-3		
IC316	F-5	Q416	E-2		
IC360	D-2	Q417	E-2		
IC361	D-2	Q480	B-2		
IC362	C-2	Q481	B-2		
IC363	C-2	Q600	D-5		
IC364	C-2	Q601	E-3		
IC365	B-2	Q602	E-4		
IC400	F-2	Q603	E-4		
IC401	H-1	Q604	E-4		
IC402	F-2	Q605	D-4		
IC403	F-1	Q606	E-4		
IC404	G-2	Q650	E-7		
IC405	H-1	Q651	E-7		
IC406	H-2	Q652	E-7		
IC407	F-1	Q680	E-4		
IC408	G-1	Q681	E-3		
IC409	G-1	Q682	E-4		
IC410	F-3	Q700	H-8		
IC411	F-3	Q701	H-8		
IC412	* F-1	Q702	H-6		
IC480	D-2	Q703	H-7		
IC481	D-2	Q704	H-8		
IC482	C-2	Q705	H-8		
IC483	C-2	Q706	G-7		
IC484	C-2	Q707	G-7		
IC485	B-2	Q708	H-8		
IC486	B-2	Q709	H-8		
IC600	E-5	Q710	H-6		
IC601	D-5	Q711	H-7		
IC602	D-5	Q712	H-8		
IC603	D-5	Q713	H-8		
IC604	D-6	Q714	H-8		
IC605	E-4	Q715	H-6		
IC606	E-4	Q716	H-7		
IC660	B-3	Q717	H-8		
IC670	B-6	Q718	H-8		
IC671	B-6	Q719	H-7		
IC700	G-7	Q720	H-8		
IC800	F-9	Q721	H-9		
IC801	G-8	Q722	H-8		
IC802	F-9	Q723	H-9		
IC803	F-8	Q724	H-9		
IC806	E-8	Q725	H-9		
IC807	D-6	Q726	H-9		
IC808	E-6	Q727	H-9		
IC809	F-9	Q728	G-6		
IC900	C-7	Q729	G-6		
IC901	C-7	Q800	G-8		
IC902	B-7	Q801	G-8		
IC903	C-8	Q802	F-9		

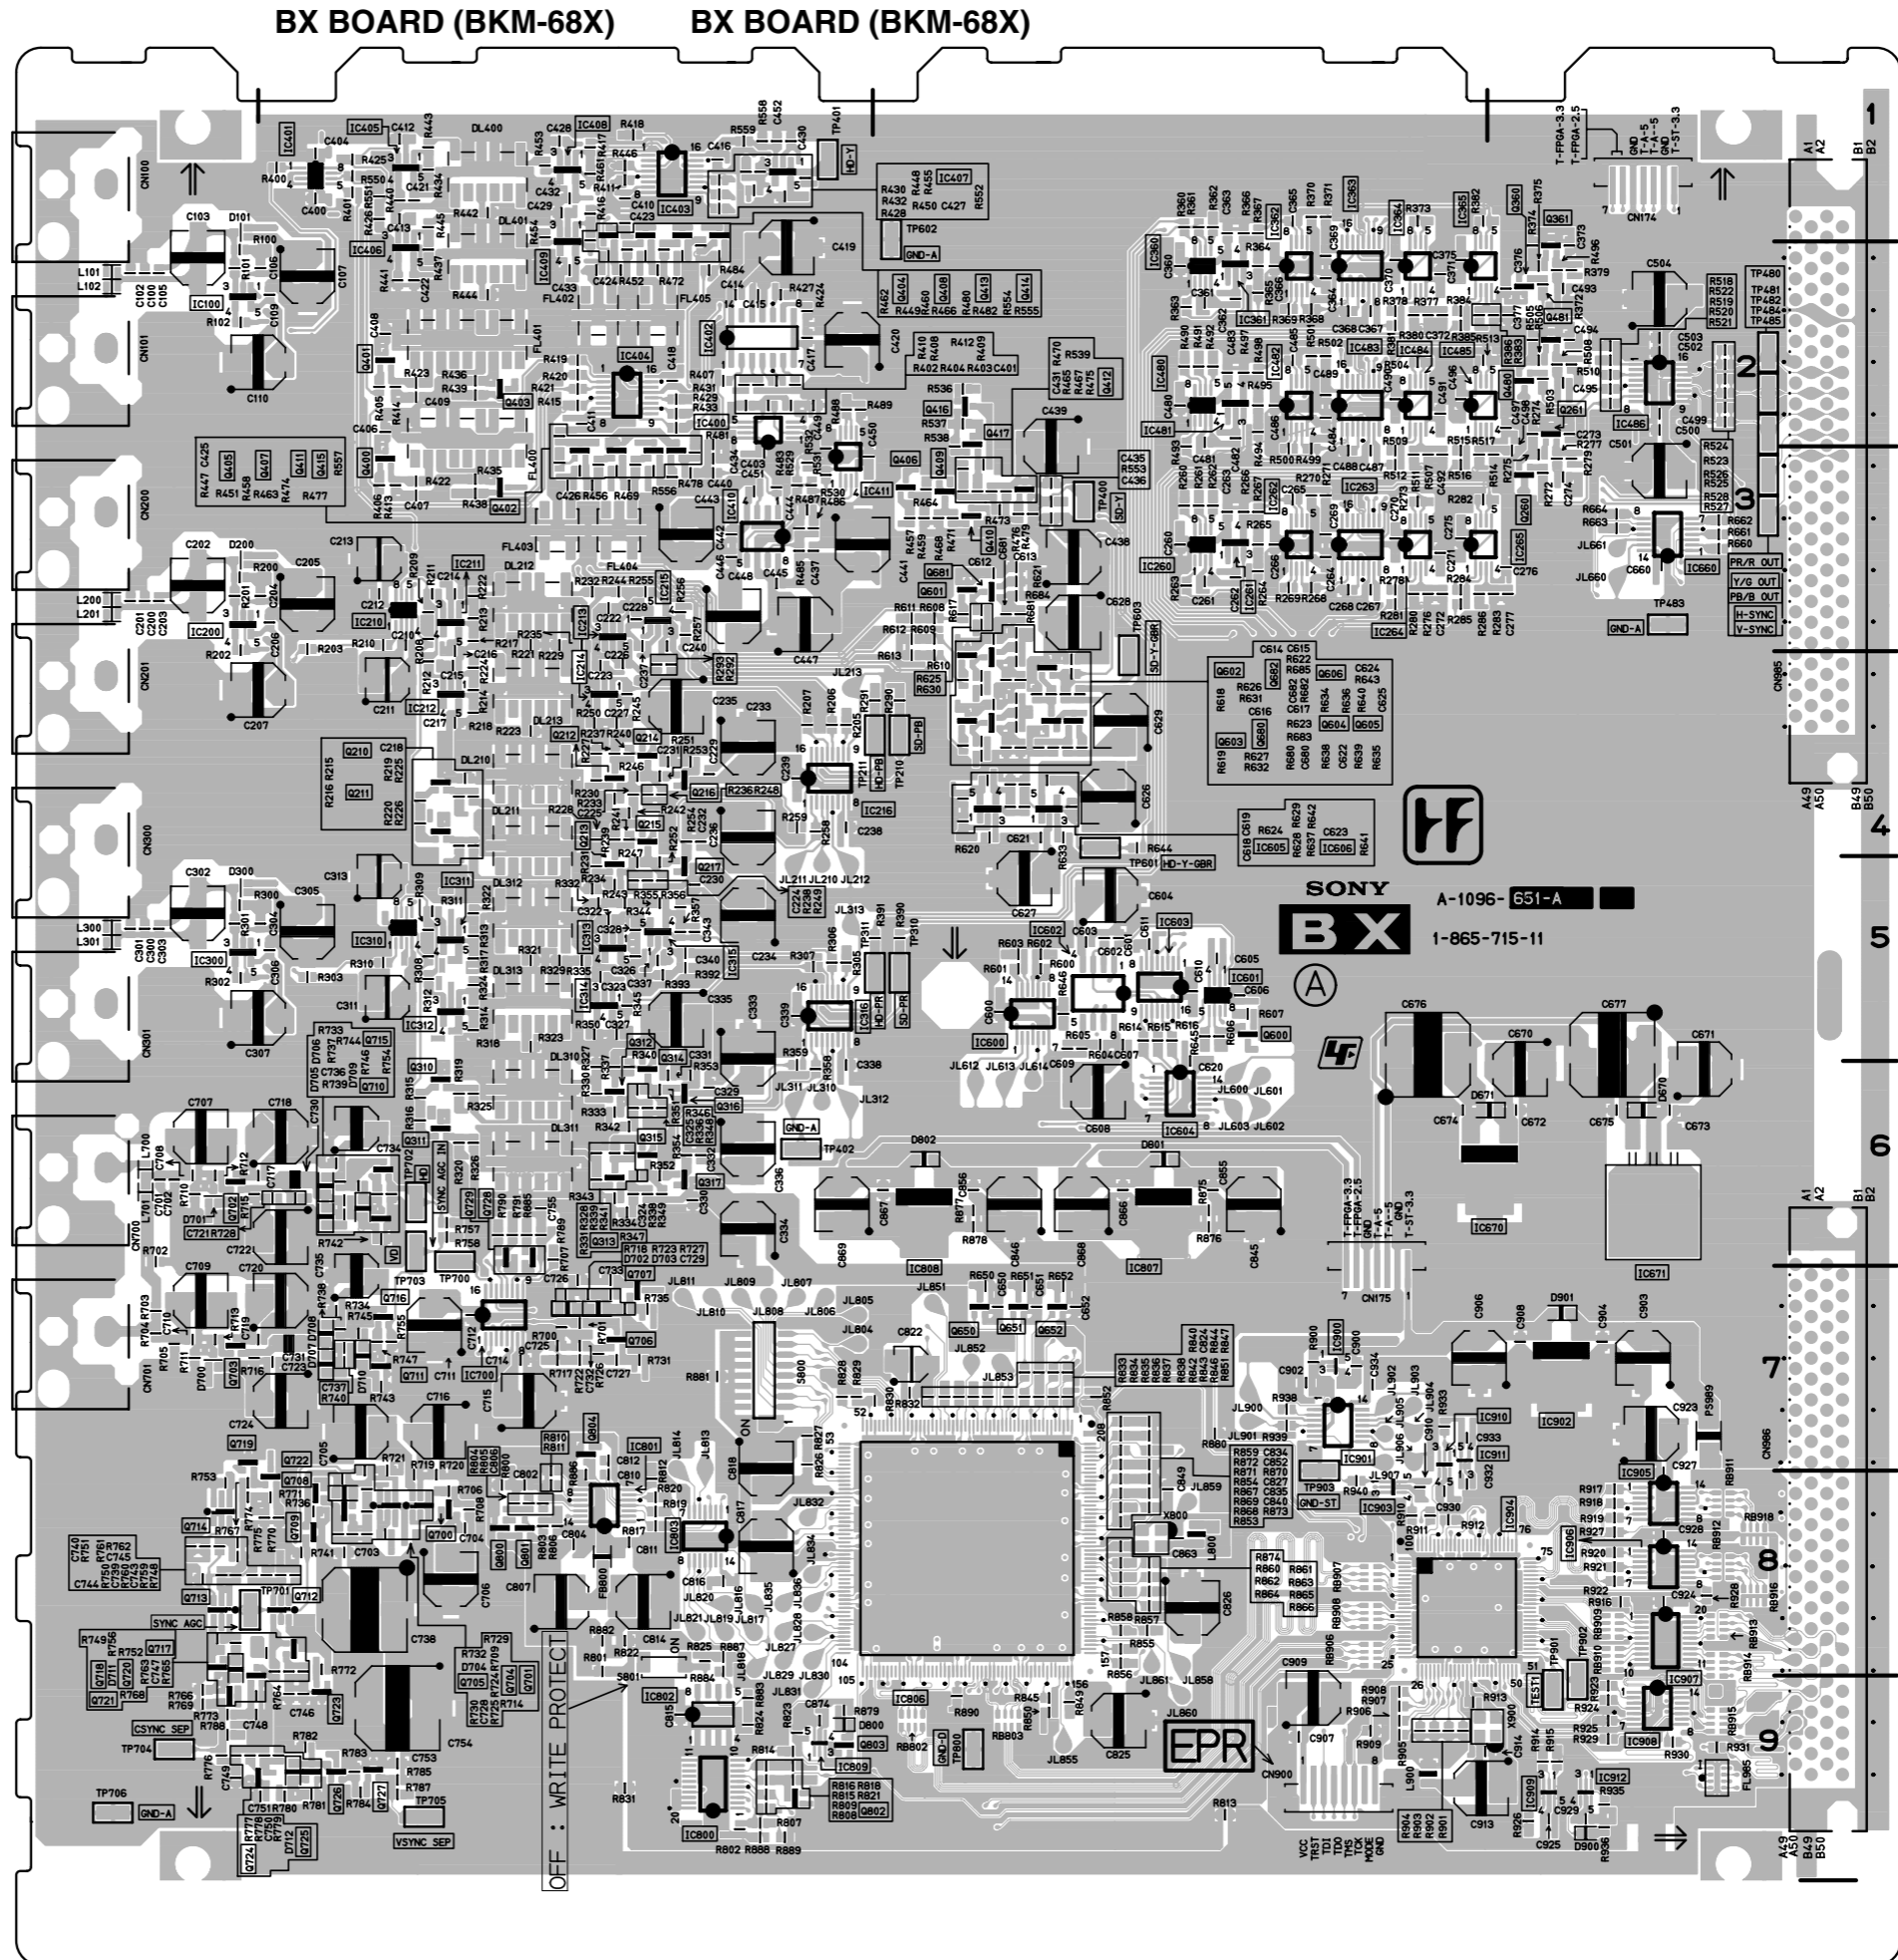

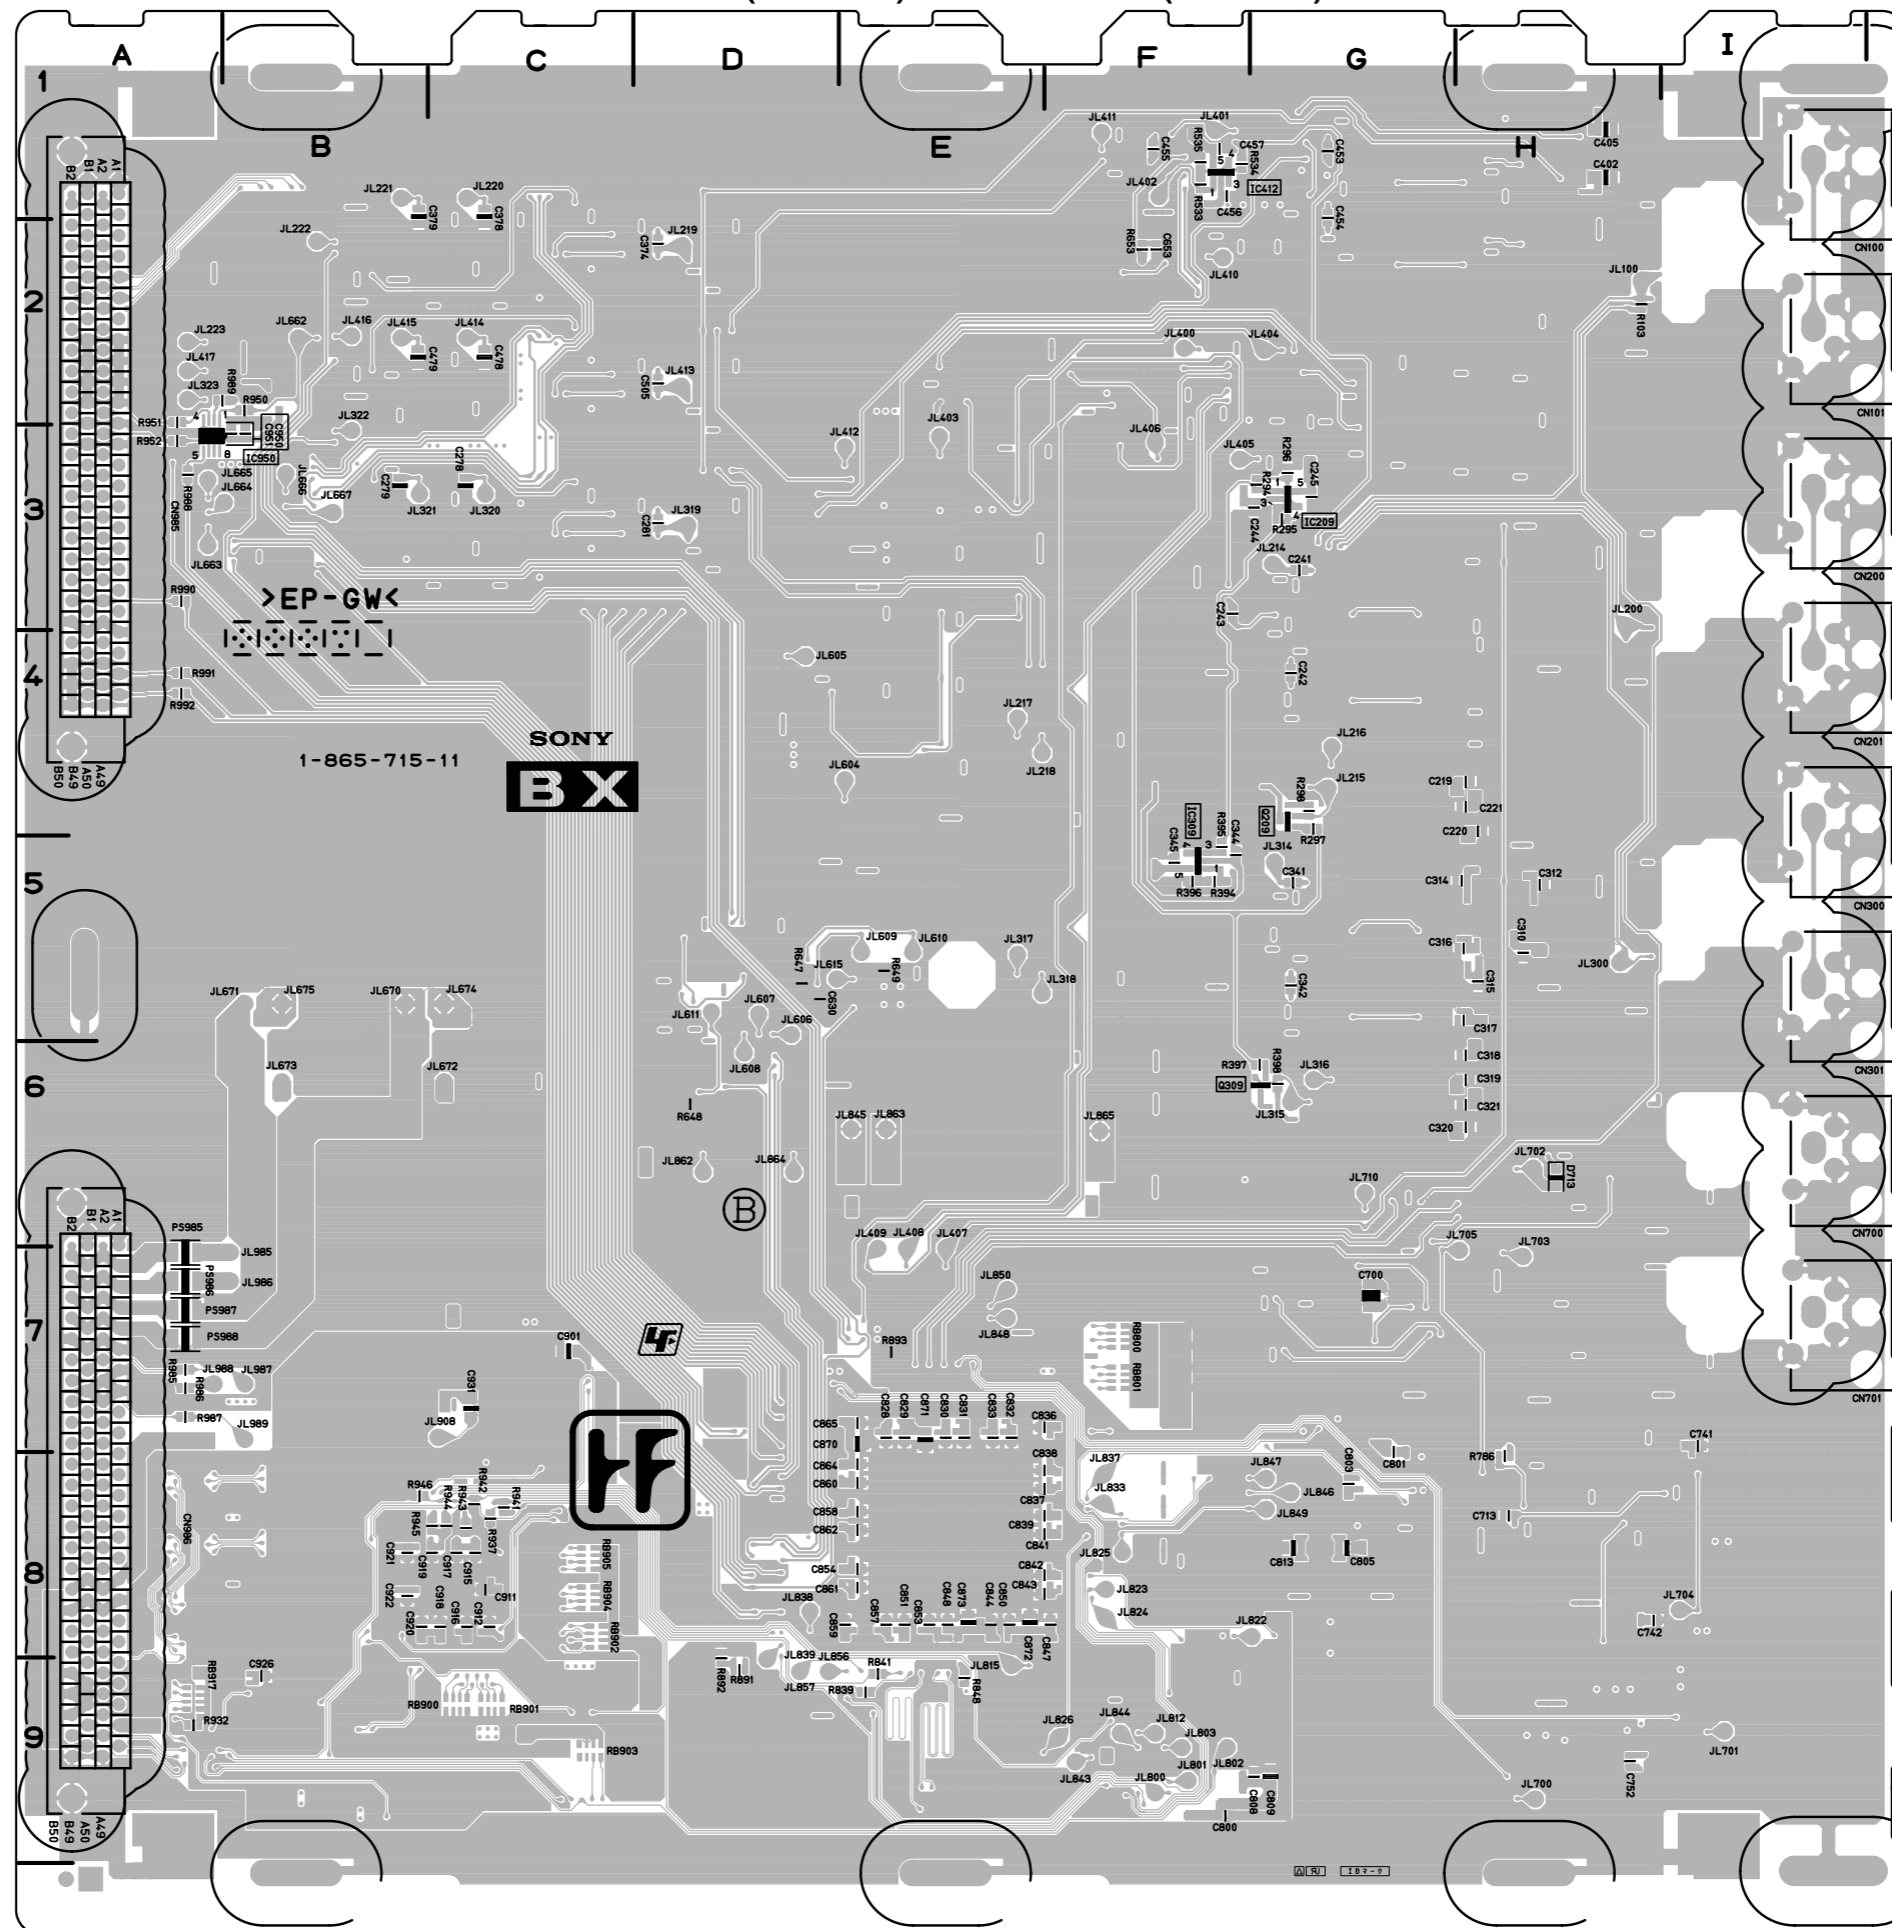

BX -B SIDE-
SUFFIX: -11

SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety checks before releasing the set to the customer :

Check the metal trim, “metallized” knobs, screws, and all other exposed metal parts for AC leakage. Check leakage as described below.

LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 3.5 mA. Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The “limit” indication is 5.25 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOM that is suitable. Nearly all battery operated digital multimeters that have a 20 V AC range are suitable. (See Fig. A)

