



# Video Products Technical Bulletin 30-2005-034

DATE: May 23, 2005

SUBJECT: REUSE PARTS WHEN REPLACING THE A BOARD

MODEL: **PVM-1340/M**  
**PVM-1341**  
**PVM-1342Q**  
**PVM-1343MD**  
*PVM-1440QM*  
*PVM-1442QM*  
*PVM-1443MD*  
*PVM-1444QM*

SERIAL NO: **ALL**

*Italicized information in green applies to customers outside the United States.*

## DESCRIPTION

When you replace the A board (A-1296-520-D), remove the parts in Table 1 from the former board and install them on the new board.

Table 1

Ref. No.	Description	Part No.
IC301	ICTA7193P	8-759-204-21
IC302	ACC Block ACC-1	1-808-627-12
IC304	Picture Quality Control Module	1-235-534-11
IC307	Blue Only Module BOM-1A	1-808-629-12
IC308	Gain/BIAS Module GBM-1	1-808-626-11
L506	Micro Inductor 3.9 MMH	1-408-238-21
L508	Ferrite Coil (HLC)	1-459-496-12

The new A board does not contain the parts, and the parts are no longer available. (See Figure 1.)

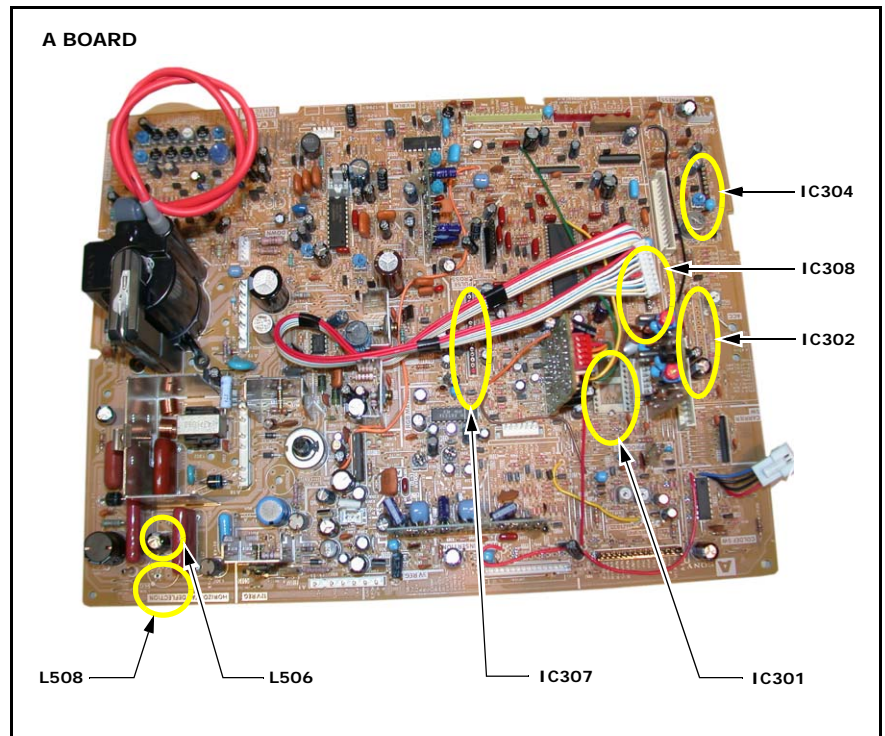


Figure 1

DPMO05-007