

**Display**

Date: **August 30, 1993**

Subject: **EXTENSION OF WHITE BALANCE  
 ADJUSTMENT RANGE**

Model: **BVM-1310/1311/1315/1316/1316C/1910  
 BVM-1911/1912/1915/1916**

Serial No: **ALL**

**DESCRIPTION**

Due to slight variations among CRTs, the temperature of a desired color may exceed the white balance adjustment range. In such cases, the adjustment range can be extended by performing the following modification procedure.


**MODIFICATION PROCEDURE**

**BI Board, Solder Side  
 (See Figures 1 and 2.)**

1. Add a 100kΩ cermet resistor in parallel to each of the following: R104, R141, R204, R241, R304, R341.
2. Verify that color temperature can be properly adjusted.

**PARTS REQUIRED**

Part No.	Description	Qty.
1-215-469-00	Res, Cermet, 100kΩ, 1%, 1/4W	6

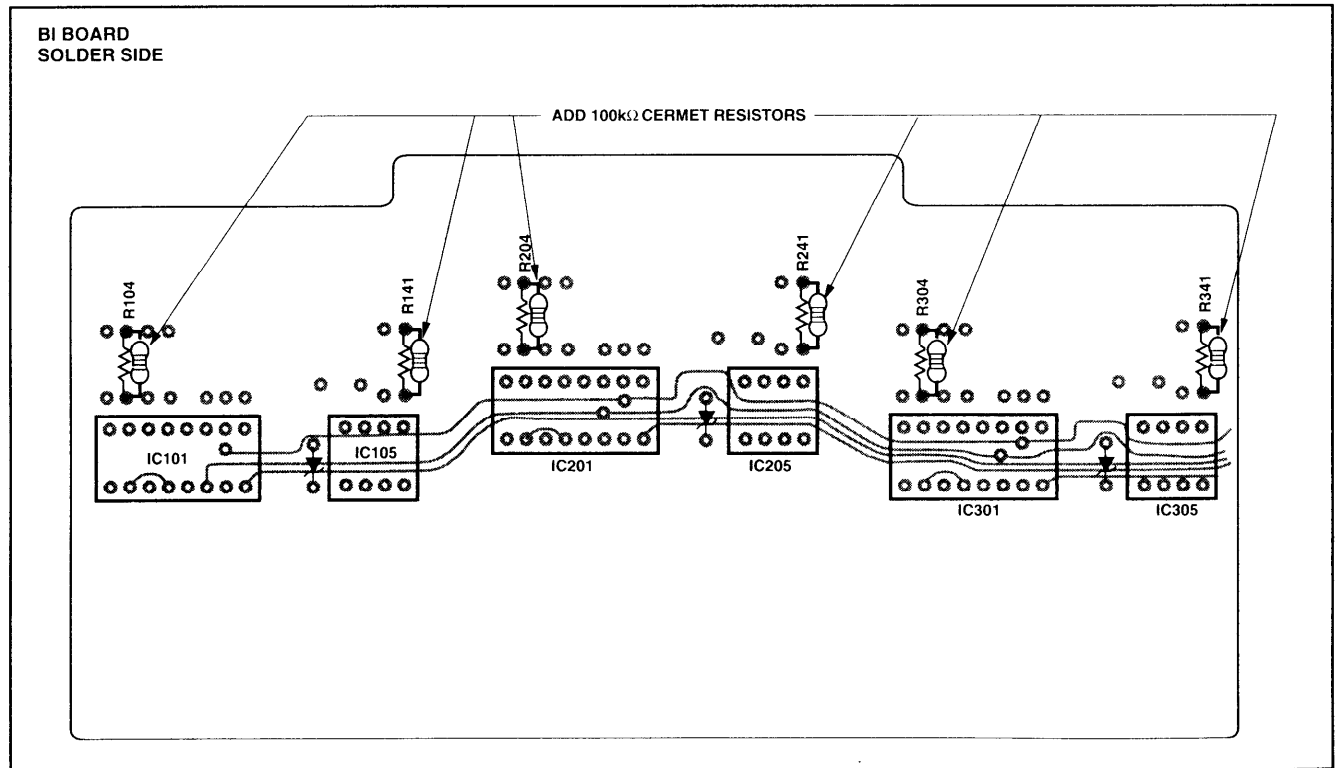

**Figure 1**

